TYPE	OUTPUT HP.	POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
AECA	100 / 25	4/8	CONT.	460	60	1800/900

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR
2 SPEED, 1 WINDING VARIABLE TORQUE

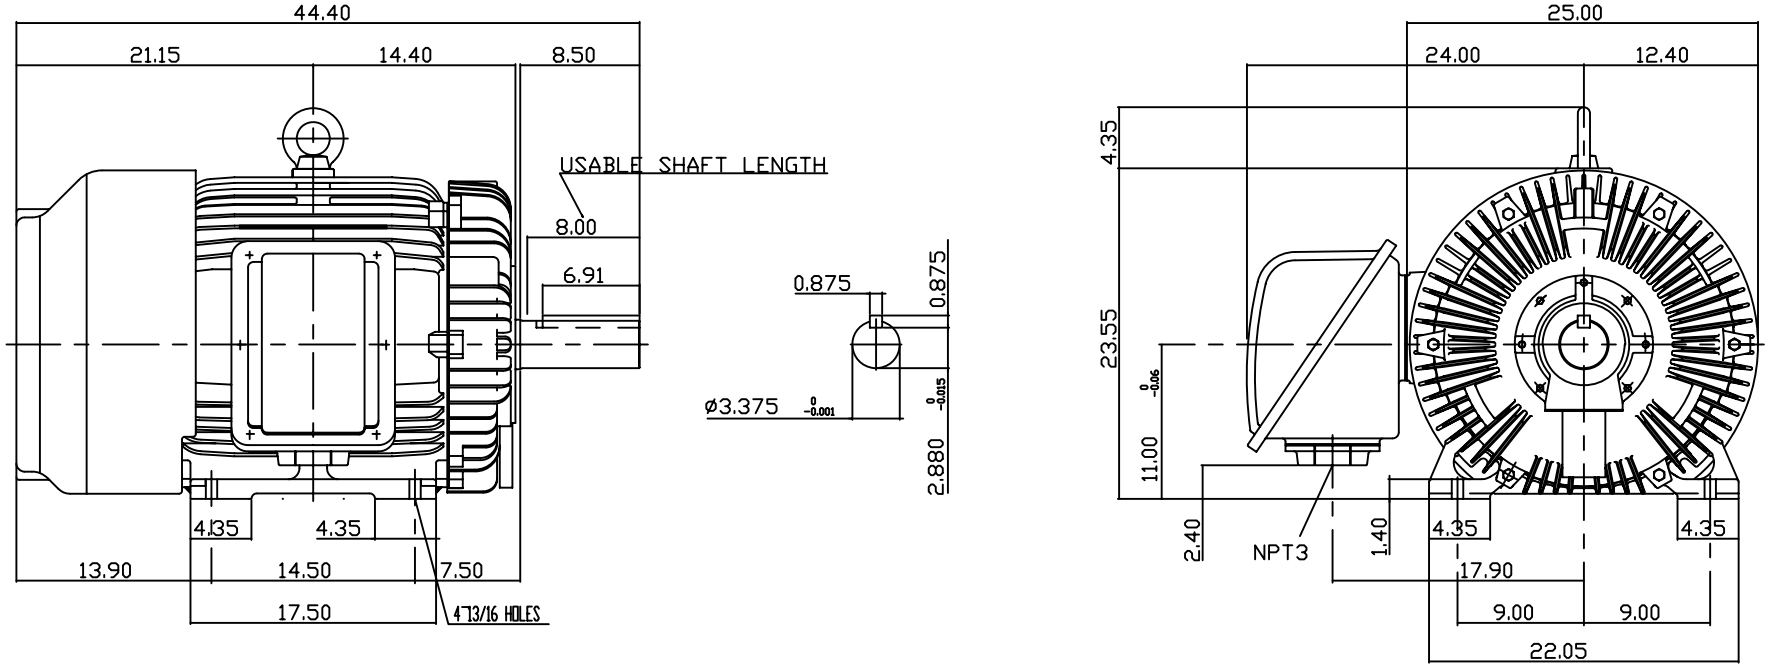

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 444T
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP55
6. BEARING SIZE: DRIVE END: 6318
   NON-DRIVE END: 6316
7. APPROX. WEIGHT: 1600 LBS

DWN.	N.QIN	JAN 13 2005
CHKD.	H.HUANG	JAN 13 2005
APPD.	C.WANG	JAN 13 2005

DATE Nov. 15, 2006

CAT. # CP1004/8

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 3A040Y599-1 REV: 00

TW-56C