


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
ASHH	125	93.3	6	CONT.	190/380	50	1000

DRIP PROOF TYPE, SQUIRREL-CAGE ROTOR

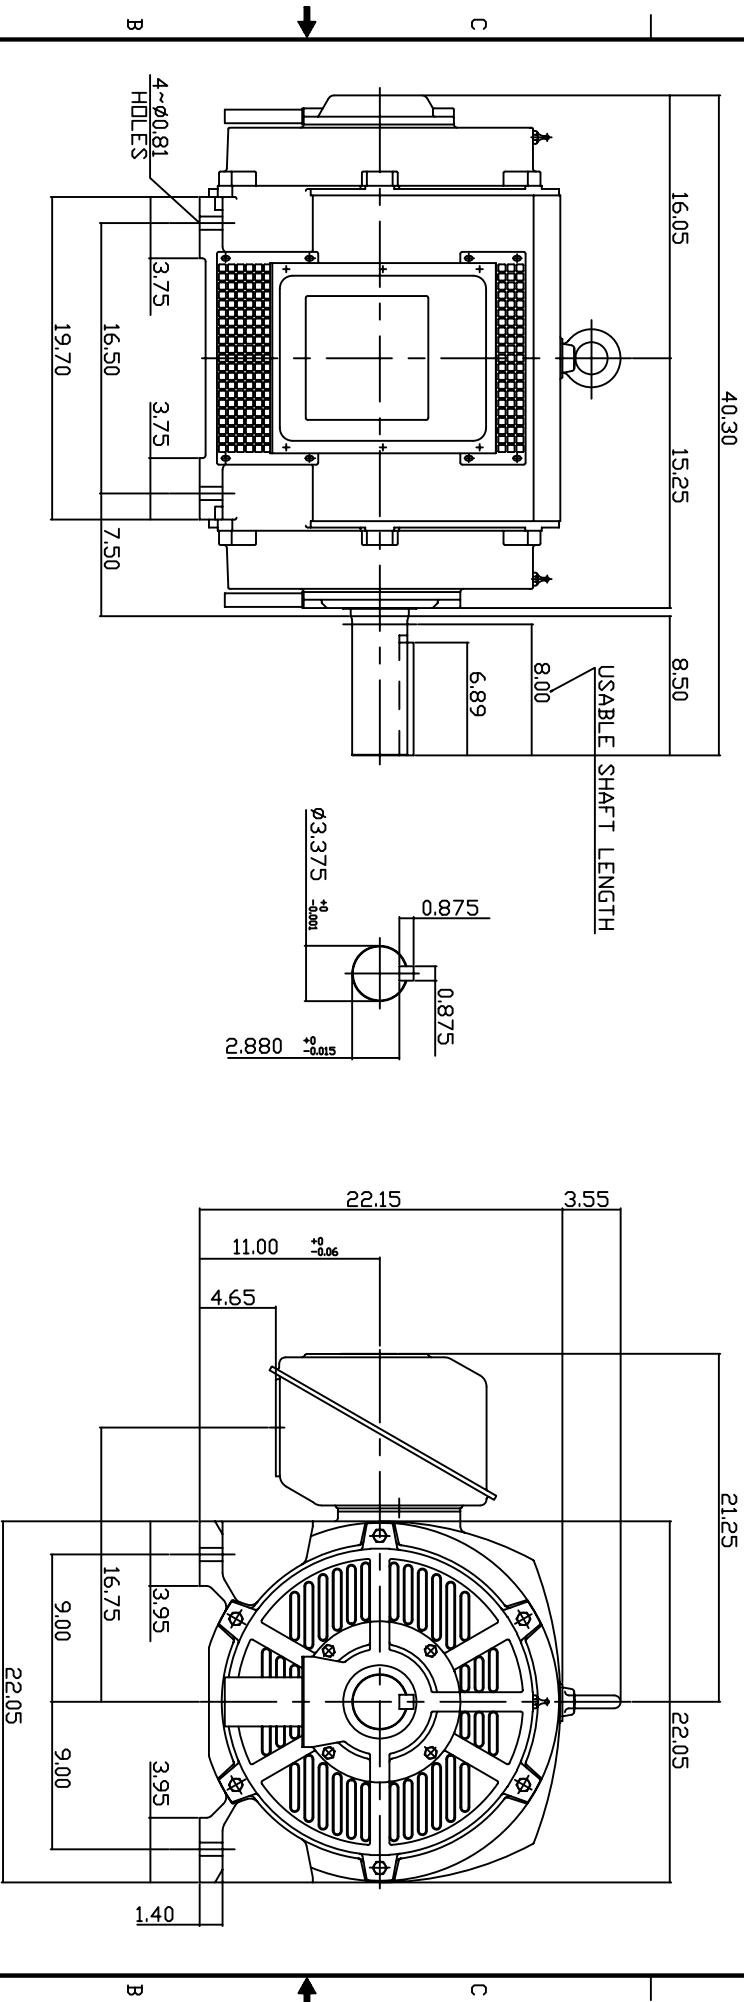

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO.445T
3. F CLASS INSULATION, S.F.1.0
4. FOR DIRECT FLEXIBLE COUPLING
5. BEARING SIZE: DRIVE END: 6318
NON-DRIVE END: 6316
6. MOTOR APPROX. WEIGHT: 1430LBS

TB-56SC

DATE May 25, 2007		OUTLINE DIMENSIONS	
Cat #: DHP1256-50		3-PHASE INDUCTION MOTOR	
DWN.	W.LLIN	MAR-26-2003	
CHKD.	W.LLIN	MAR-26-2003	
APPD.	C.VANG	MAR-26-2003	
TIEC Westinghouse		DWG NO.	3A040T261
		REV:	00