


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
ASHH	150	111.9	6	CONT.	575	60	1200

DRIP PROOF TYPE, SQUIRREL-CAGE ROTOR

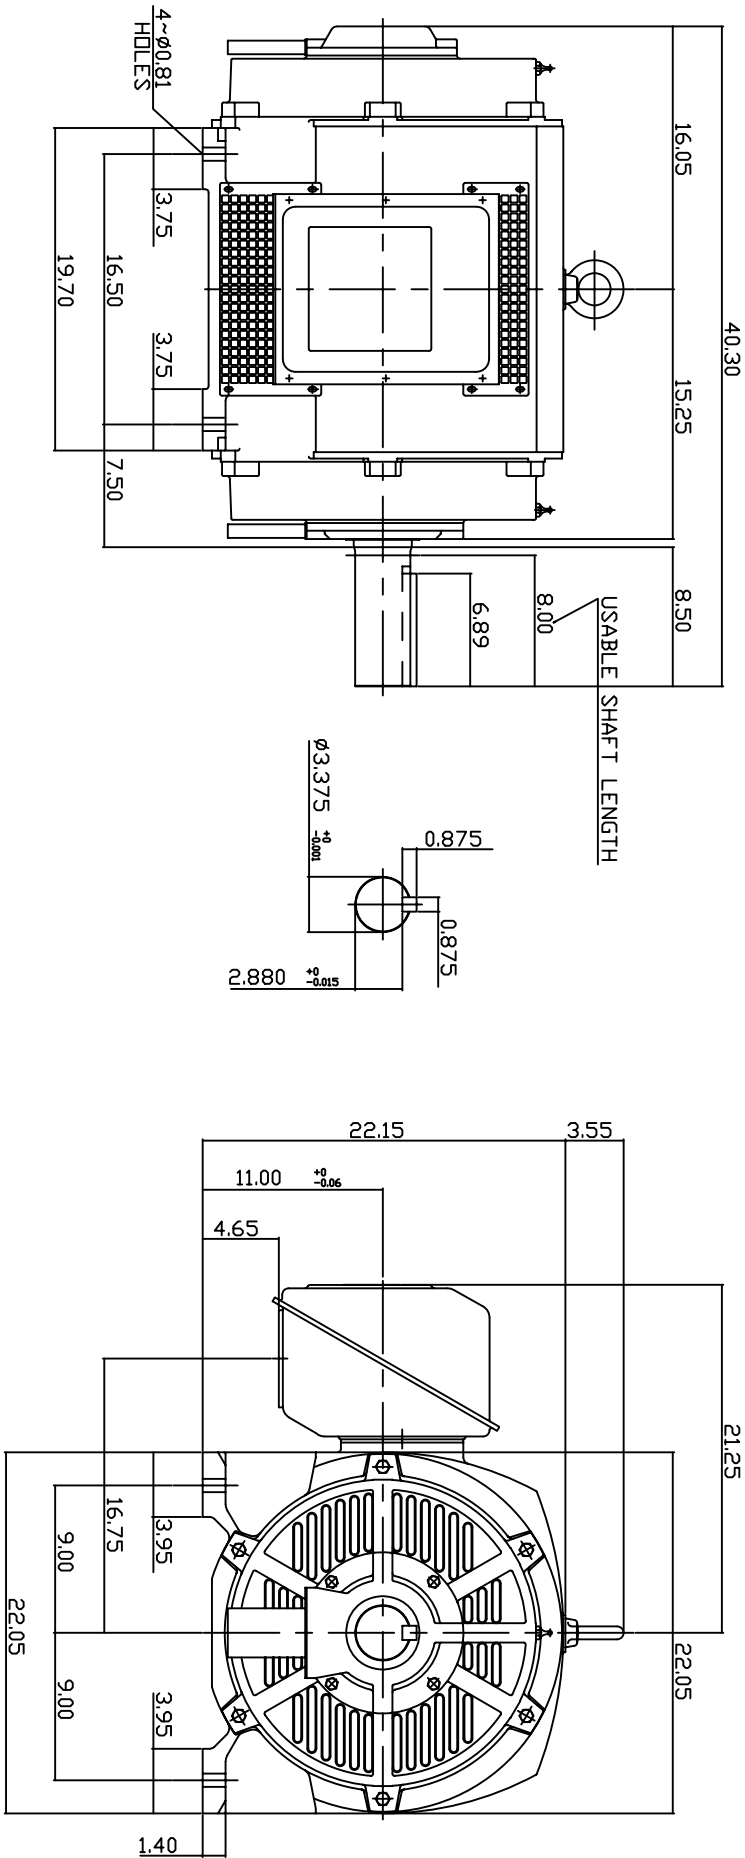

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO.445T
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT DRIVE
5. BEARING SIZE: DRIVE END: 6318
NON-DRIVE END: 6316
6. MOTOR APPROX. WEIGHT: 1430LBS

TB-56SC

DWN.	W.L.LIN	MAR-26-2003
CHKD.	W.L.LIN	MAR-26-2003
APPD.	C.VANG	MAR-26-2003

DATE May 14, 2007		OUTLINE DIMENSIONS	
Cat. #: DHP15065		3-PHASE INDUCTION MOTOR	
TEC Westinghouse		Dwg NO. 3A040T261	
		REV: 00	