


| TYPE | OUTPUT |       | POLE | TIME<br>RATING | VOLTAGE<br>V | Hz | SYN SPEED<br>R.P.M |
|------|--------|-------|------|----------------|--------------|----|--------------------|
|      | HP.    | KW.   |      |                |              |    |                    |
| ASHH | 150    | 111.9 | 6    | CONT.          | 380          | 50 | 1000               |

DRIP PROOF TYPE, SQUIRREL-CAGE ROTOR

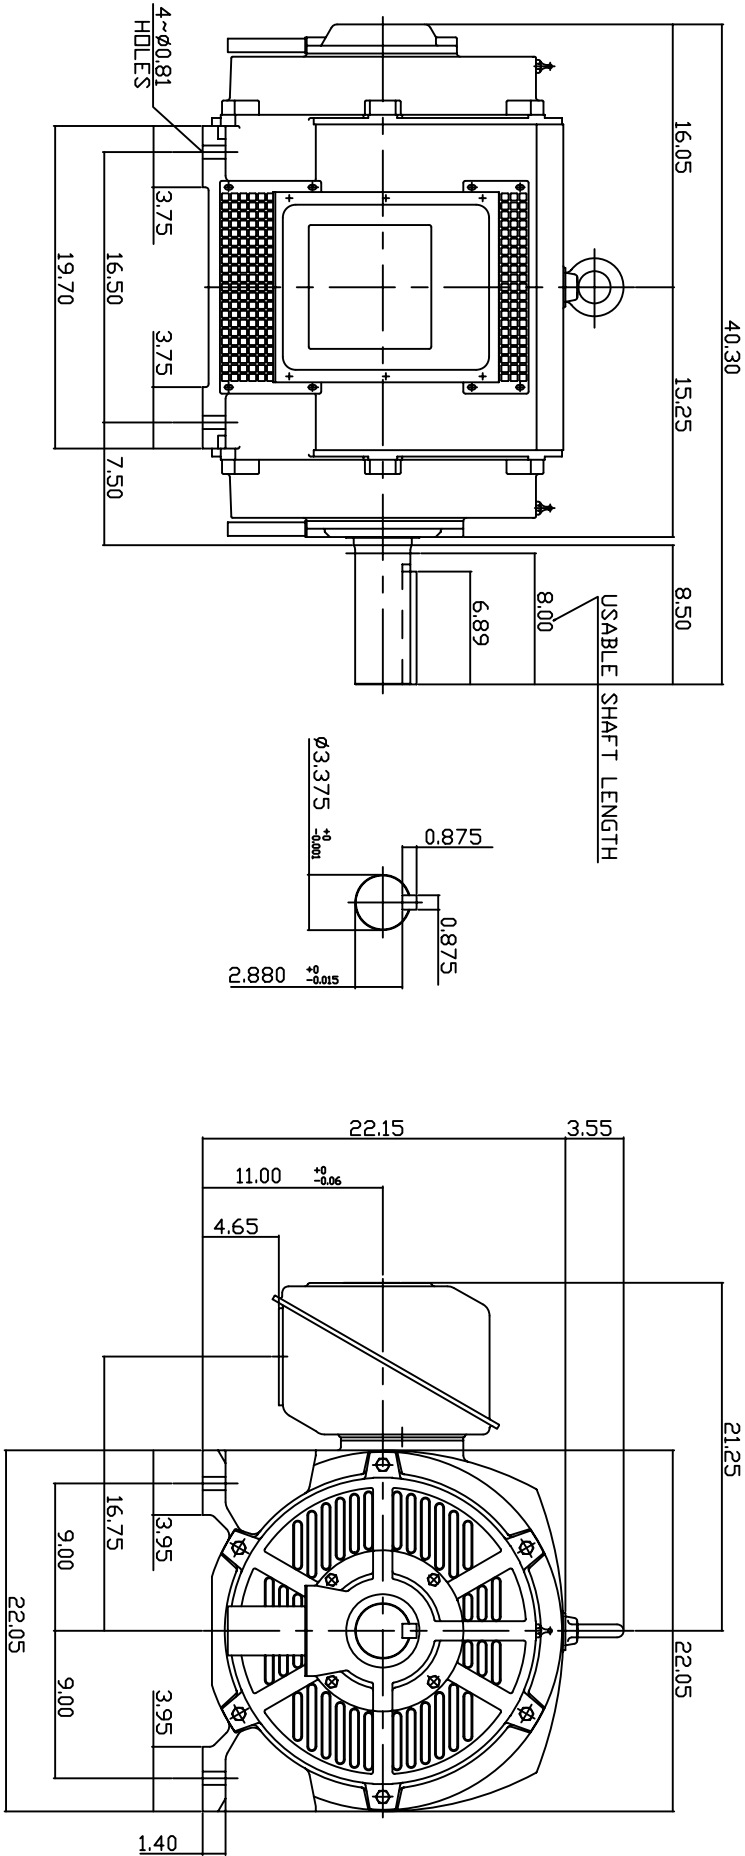

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO.445T
3. F CLASS INSULATION, S.F.1.0
4. FOR BELT DRIVE
5. BEARING SIZE: DRIVE END: NU318  
NON-DRIVE END: 6316
6. MOTOR APPROX. WEIGHT: 1430LBS

TB-56SC

|       |         |             |
|-------|---------|-------------|
| DWN.  | W.L.LIN | MAR-26-2003 |
| CHKD. | W.L.LIN | MAR-26-2003 |
| APPD. | C.WANG  | MAR-26-2003 |

|         |              |         |                 |
|---------|--------------|---------|-----------------|
| DATE    | May 25, 2007 | OUTLINE | DIMENSIONS      |
| Co.t.#: | DHP1506R-50  | 3-PHASE | INDUCTION MOTOR |
| TIEG    | Westinghouse | DWG NO. | 3A040T261       |
|         |              | REV:    | 00              |