
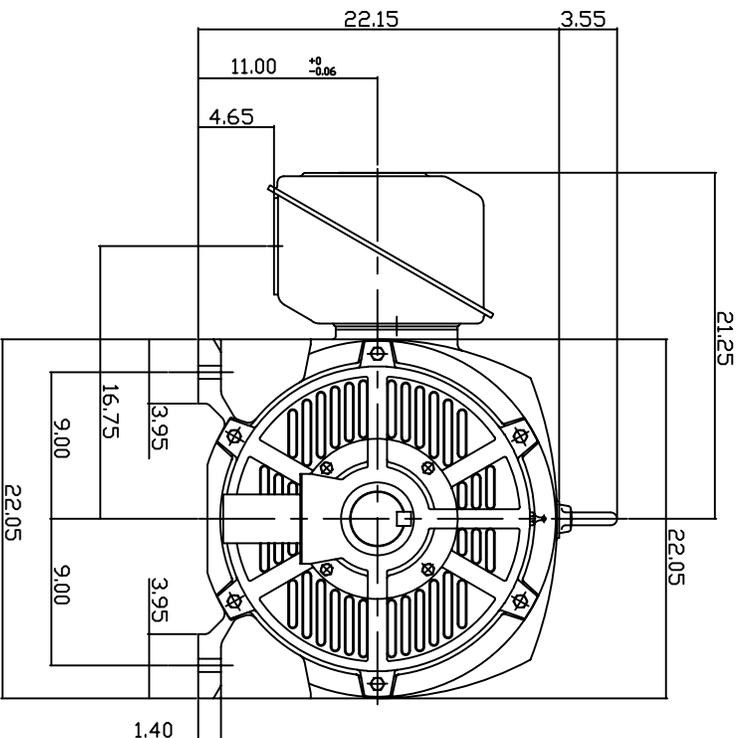



| TYPE | OUTPUT |       | POLE | TIME RATING CNT. | VOLTAGE V | Hz | SYNSPEED R.P.M |
|------|--------|-------|------|------------------|-----------|----|----------------|
|      | HP.    | KW.   |      |                  |           |    |                |
| ASHH | 200    | 149.2 | 4    |                  | 575       | 60 | 1800           |

DRIP PROOF TYPE, SQUIRREL-CAGE ROTOR

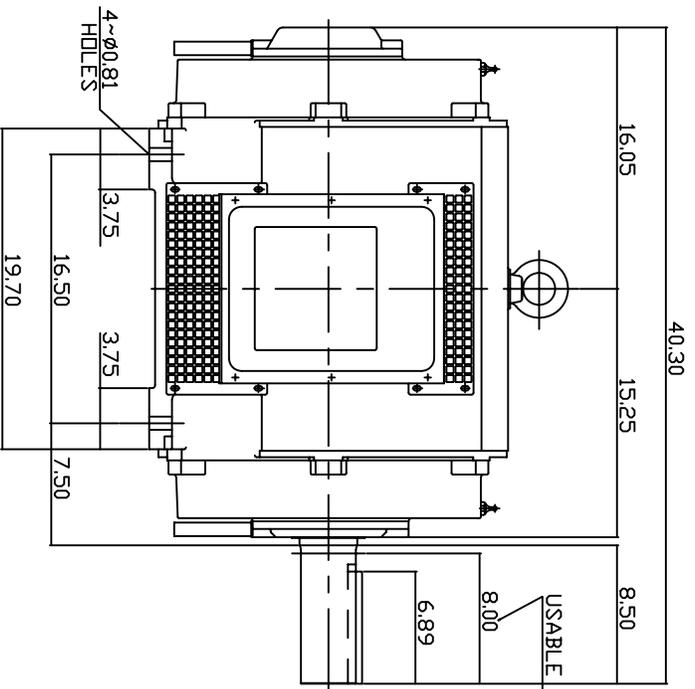

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME ND445T
3. F CLASS INSULATION, S.F.115
4. FOR DIRECT DRIVE
5. BEARING SIZE: DRIVE END: 6318  
NON-DRIVE END: 6316
6. MOTOR APPROX. WEIGHT: 1430LBS

TB-56SSC

| DWN.  | V.L.LIN | MAR-26-2003 |
|-------|---------|-------------|
| CHKD. | W.L.LIN | MAR-26-2003 |
| APPD. | C.VANG  | MAR-26-2003 |

DATE May 25, 2007

Cat. #: DHP20045

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR



DWG NO. REV: 00

3A040T261

MOTOR COMPANY