
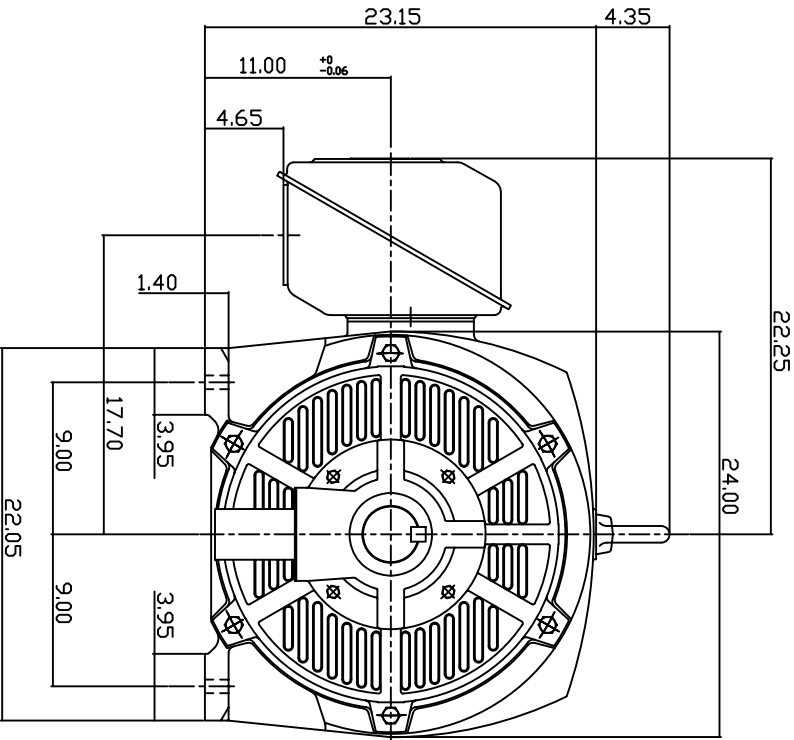



TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
ASHH	200	150	6	CDNT.	380	50	1000

DRIP PROOF TYPE, SQUIRREL-CAGE ROTOR

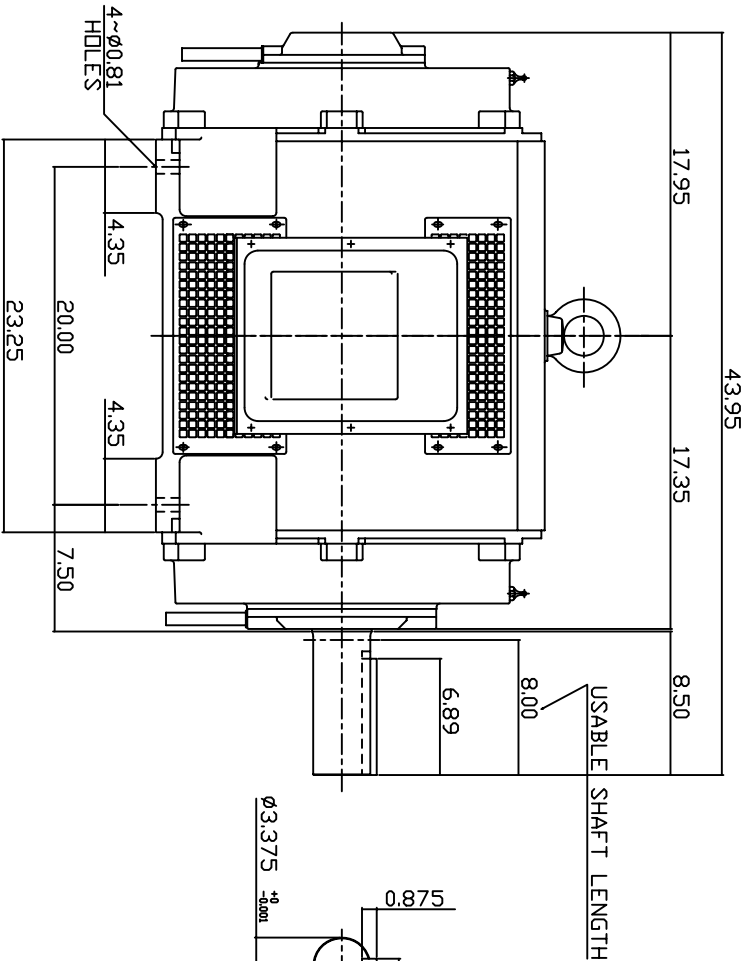

NOTE:

- 1. DIMENSIONS IN INCH.
- 2. FRAME NO. 447T
- 3. F CLASS INSULATION, S.F.1.0
- 4. FOR DIRECT DRIVE APPLICATIONS
- 5. BEARING SIZE: DRIVE END: 6320
NON-DRIVE END: 6318
- 6. MOTOR APPROX. WEIGHT: 1810 LBS

TB-56SC

DWN.

CHKD.

APPD.

W.L.LIN

W.L.LIN

C.WANG

MAR. 26. 2003

MAR. 26. 2003

MAR. 26. 2003

DATE

May 21 2007

OUTLINE DIMENSIONS

CATALOG NO.

DHP2006-50

3-PHASE INDUCTION MOTOR

DWG NO.

3A040T263

REV: 00