
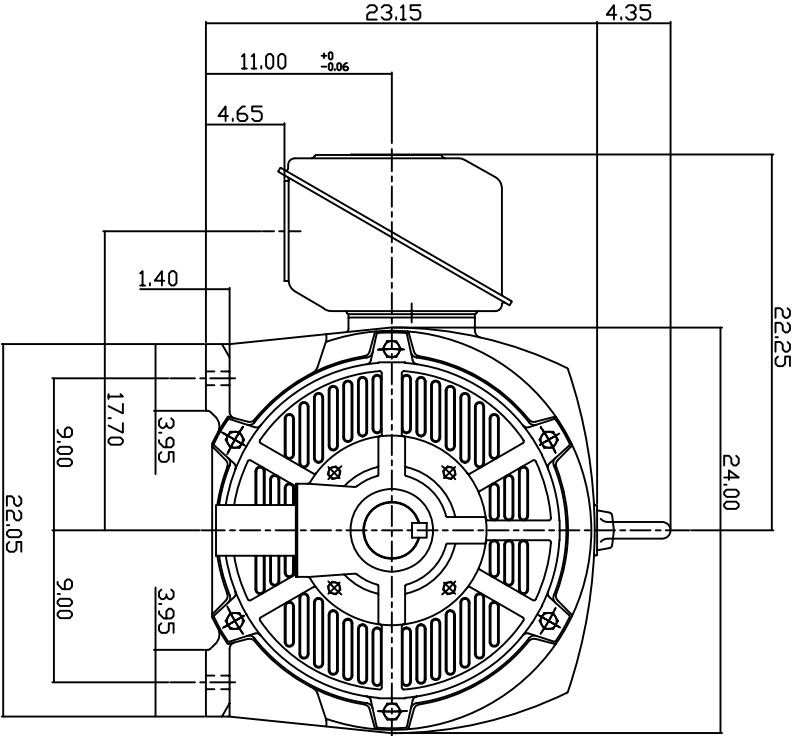


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
ASHH	250	186.5	4	CDNT.	575	60	1800

DRIP PROOF TYPE, SQUIRREL-CAGE ROTOR

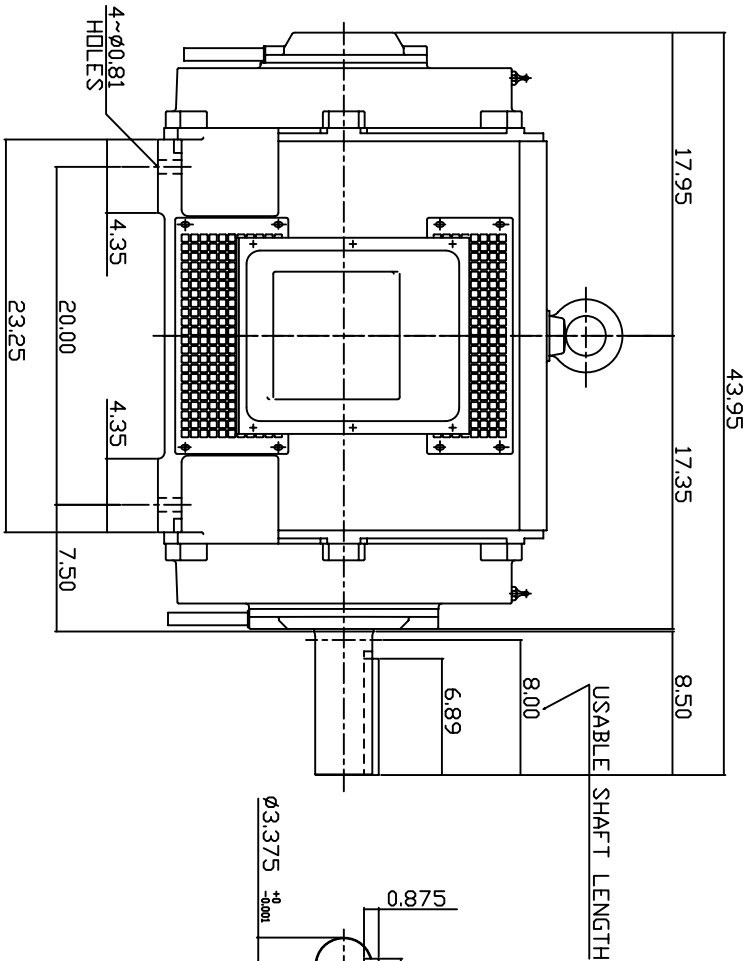

NOTE:

- 1. DIMENSIONS IN INCH.
- 2. FRAME NO. 447T
- 3. F CLASS INSULATION, S.F.1.15
- 4. FOR DIRECT DRIVE APPLICATIONS
- 5. BEARING SIZE: DRIVE END: 6320
NON-DRIVE END: 6318
- 6. MOTOR APPROX. WEIGHT: 1810 LBS

TB-56SC

DWN.	W.L.LIN	MAR. 26. 2003
CHKD.	W.L.LIN	MAR. 26. 2003
APPD.	C.WANG	MAR. 26. 2003

DATE	OUTLINE DIMENSIONS	
February 24, 2007		
CATALOG NO.	3-PHASE INDUCTION MOTOR	
DHP25045		



DWG NO. 3A040T263-1
REV: 00