

11

10

9

8

7

6

5


4

3


2

1

POLE	HP	kW	Hz	VOLT	r/min(RPM)	INS	RATING	DIMENSION IN	APPROX WEIGHT	BEARINGS	
8	100	74.6	60	230/460	900	F	CONT.	INCH	1718lbs	DE:6318	NDE:6316

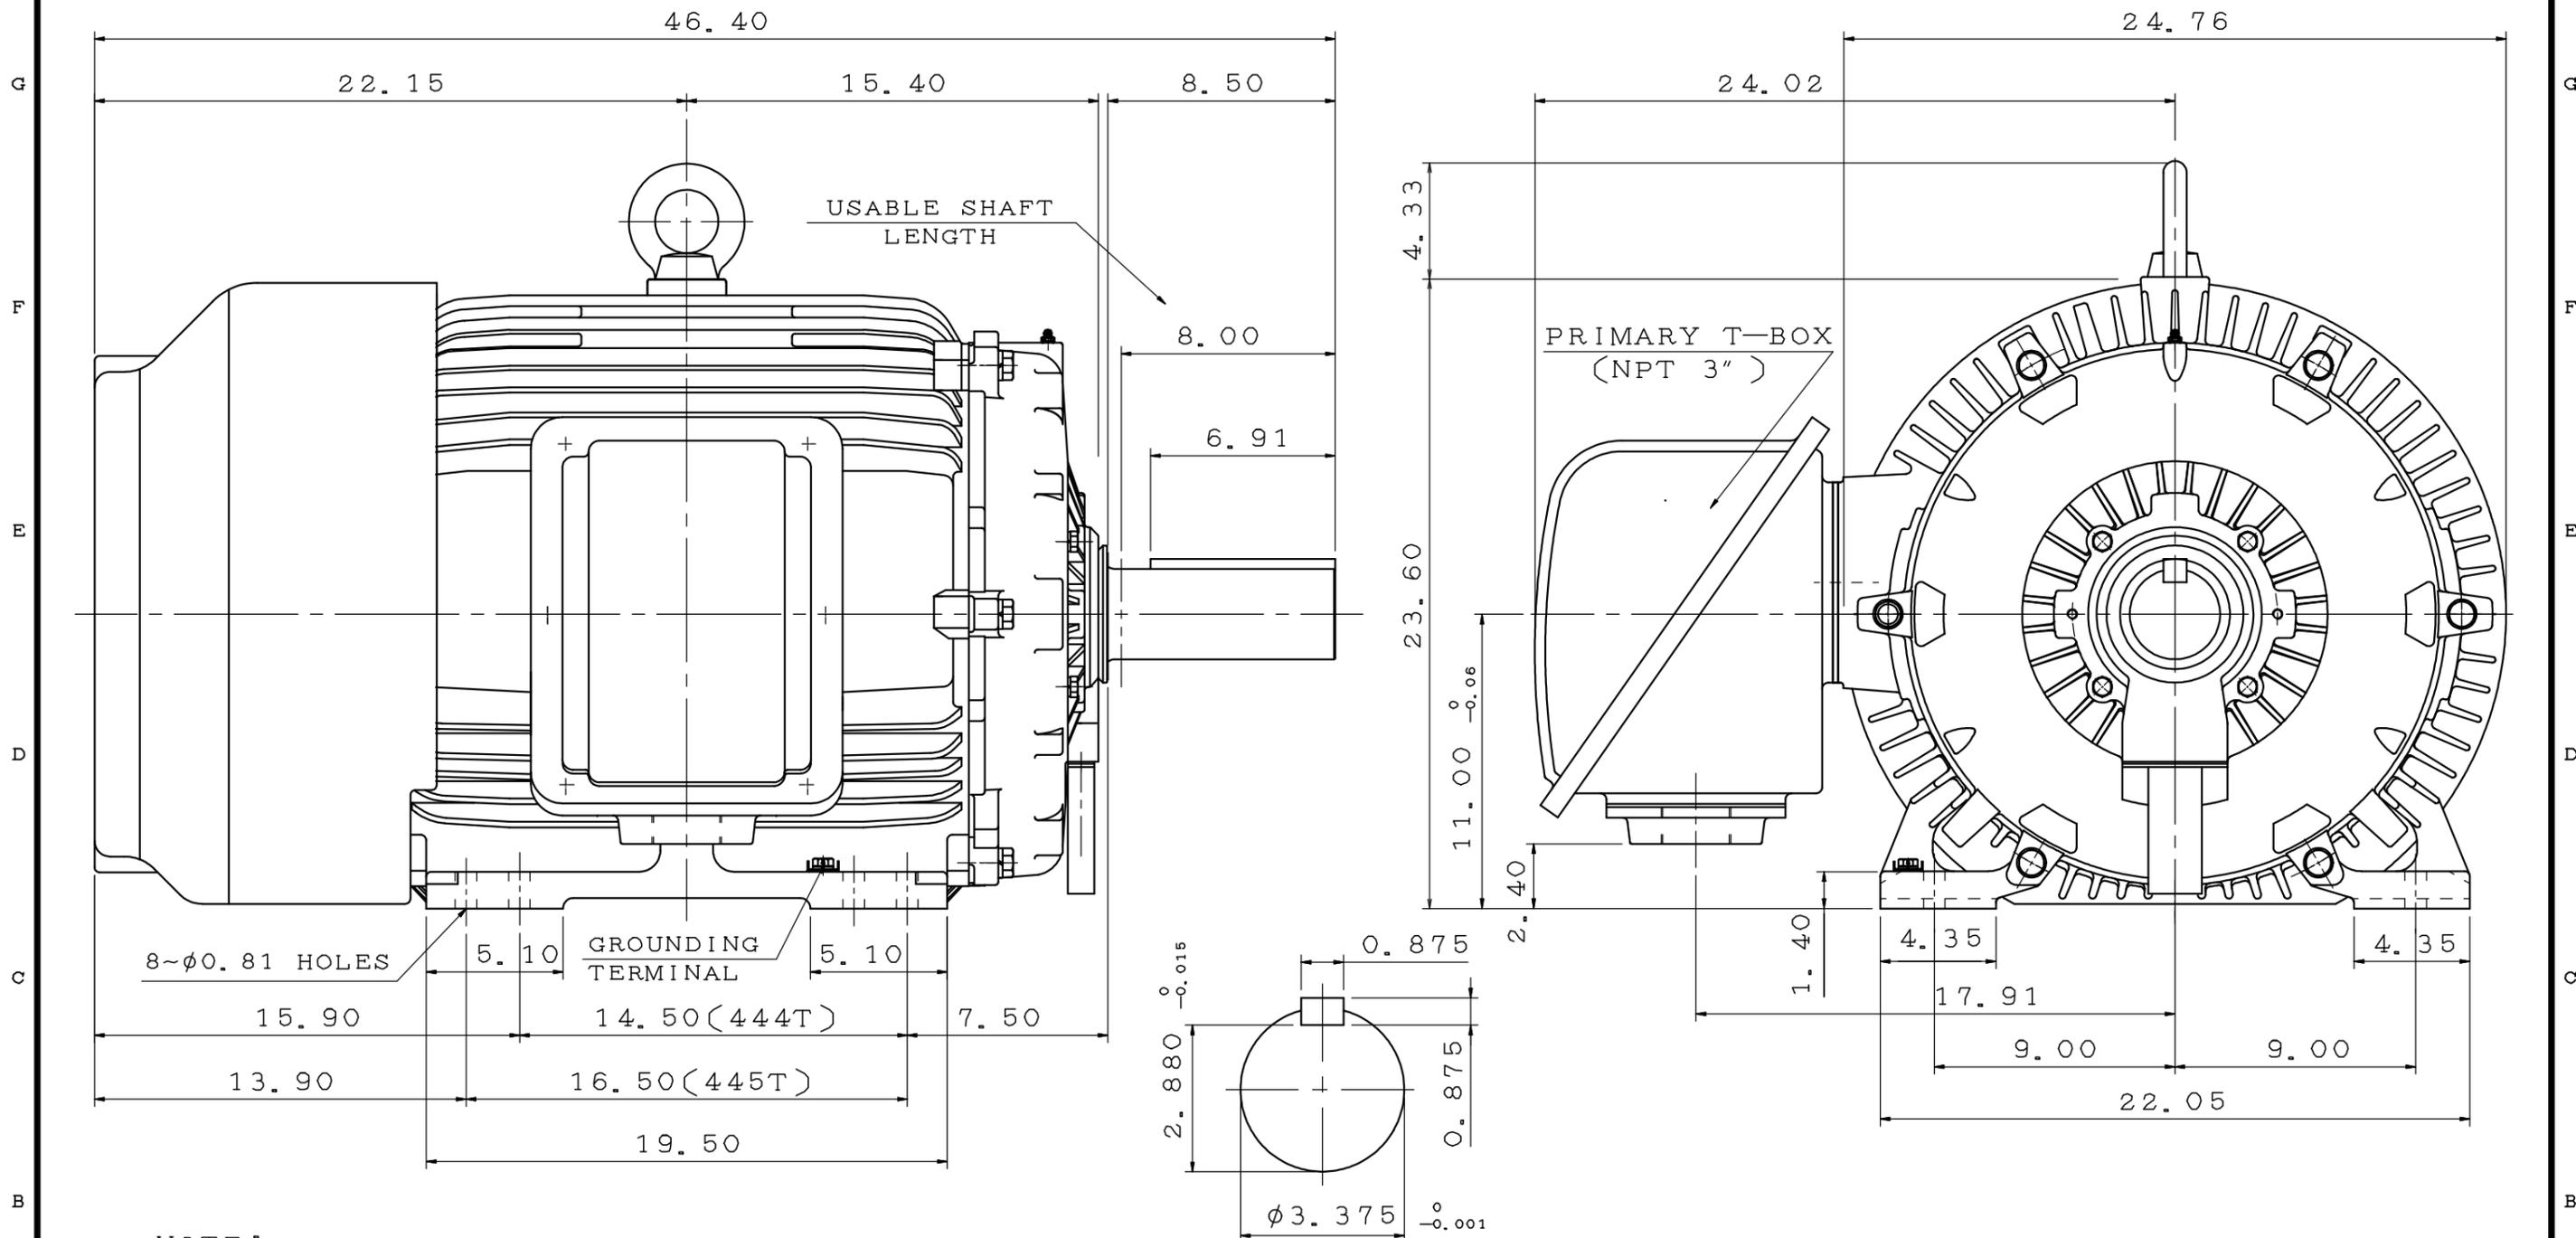

NOTE:  
 1. FOR DIRECT FLEXIBLE COUPLING  
 2. ENCLOSURE: IP55 PROTECTION

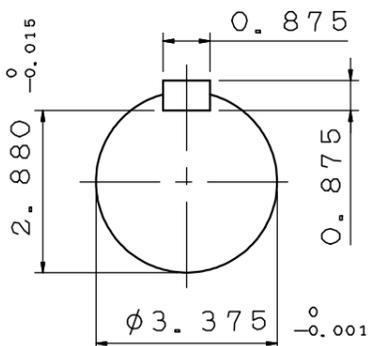

SHAFT END  
ENLARGED VIEW

OUTLINE DIMENSIONS  
3-PHASE INDUCTION MOTOR

MOTOR TYPE	AEHH8N	FRAME NO.	445T
CATALOG NO:	EP1008	DATE	APRIL 1, 2020

APPD.	BEN. YANG	06.19.19
CHKD.	K. L. KUO	06.19.19
DWG.	K. L. KUO	06.15.19



DWG NO.  
31057C559760

第三角法

11

10

9

8

7

6

5

4

3

2

1