


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE	Hz	SYNSPEED R.P.M
	HP.	KW.					
AEHH8N	150	111.9	4	CONT.	380	50	1500

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

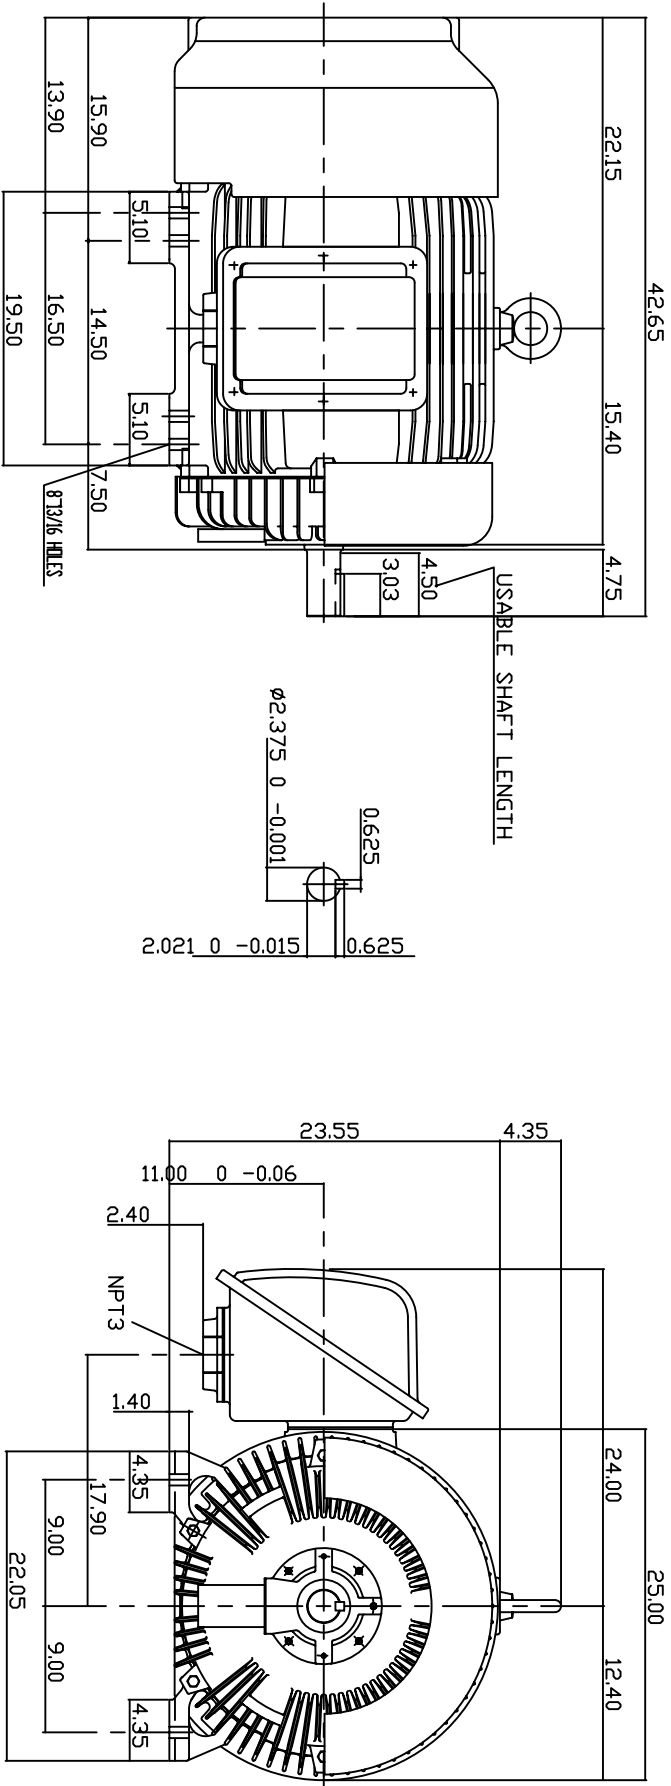

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 445TS
3. F CLASS INSULATION, S.F.10
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE END: 6318
NON-DRIVE END: 6316
7. APPROX. WEIGHT: 1775 LBS

TW-56C

DATE Feb. 16, 2007		OUTLINE DIMENSIONS	
DWN. T.H.Pan	FEB-17 2005	CAT #	EP1504S-50
CHKD. H.HUANG	FEB-17 2005	3-PHASE INDUCTION MOTOR	
APPD. C.WANG	FEB-17 2005	Dwg NO. REV: 00	
		3A040Y684A	



6 5 4 3 2 1