


| TYPE | OUTPUT | | POLE | TIME RATING | VOLTAGE V | Hz | SYNSPEED RPM |
|--------|--------|-------|------|-------------|--------------|----|-----------------|
| | HP. | kW. | | | | | |
| AEHH8N | 300 | 223.8 | 6 | CONT. | 575 | 60 | 1200 |

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

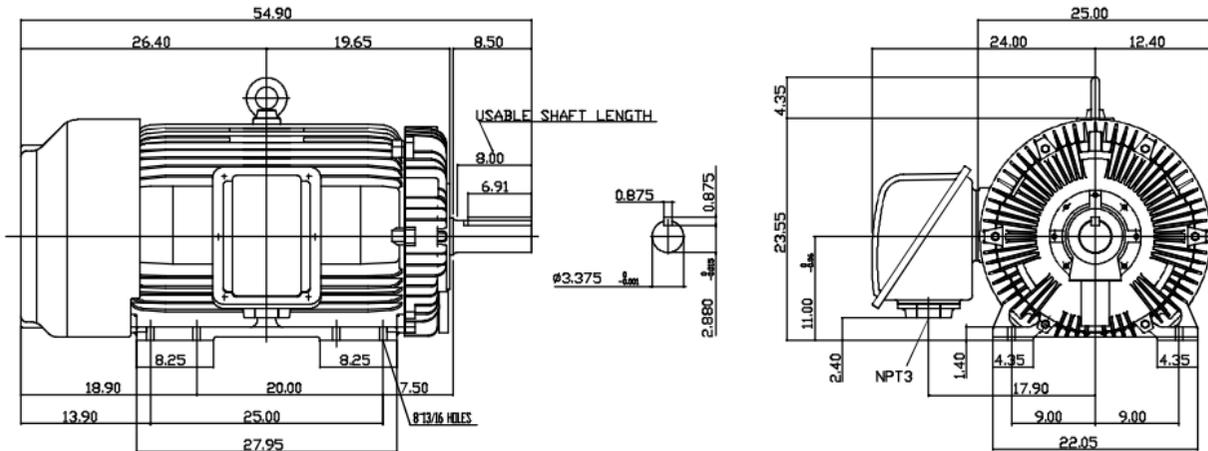

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 449T
3. F CLASS INSULATION, S.F.115
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE END: 6320
NON-DRIVE END: 6316
7. APPROX. WEIGHT: 3450 LBS

TW-56C

| | |
|------------------|-------------------------|
| DATE 12-17-12 | OUTLINE DIMENSIONS |
| CATALOG #EP30065 | 3-PHASE INDUCTION MOTOR |

| | |
|---------------|-------------|
| DWN. J.WANG | JAN 28 2005 |
| CHKD. H.HUANG | JAN 28 2005 |
| APPD. C.WANG | JAN 28 2005 |

TEC Westinghouse

DWG NO. REV: 00
3A040Y647