TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP	KW					
AEHH8N	350	261	4	CONT.	380	50	1500

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

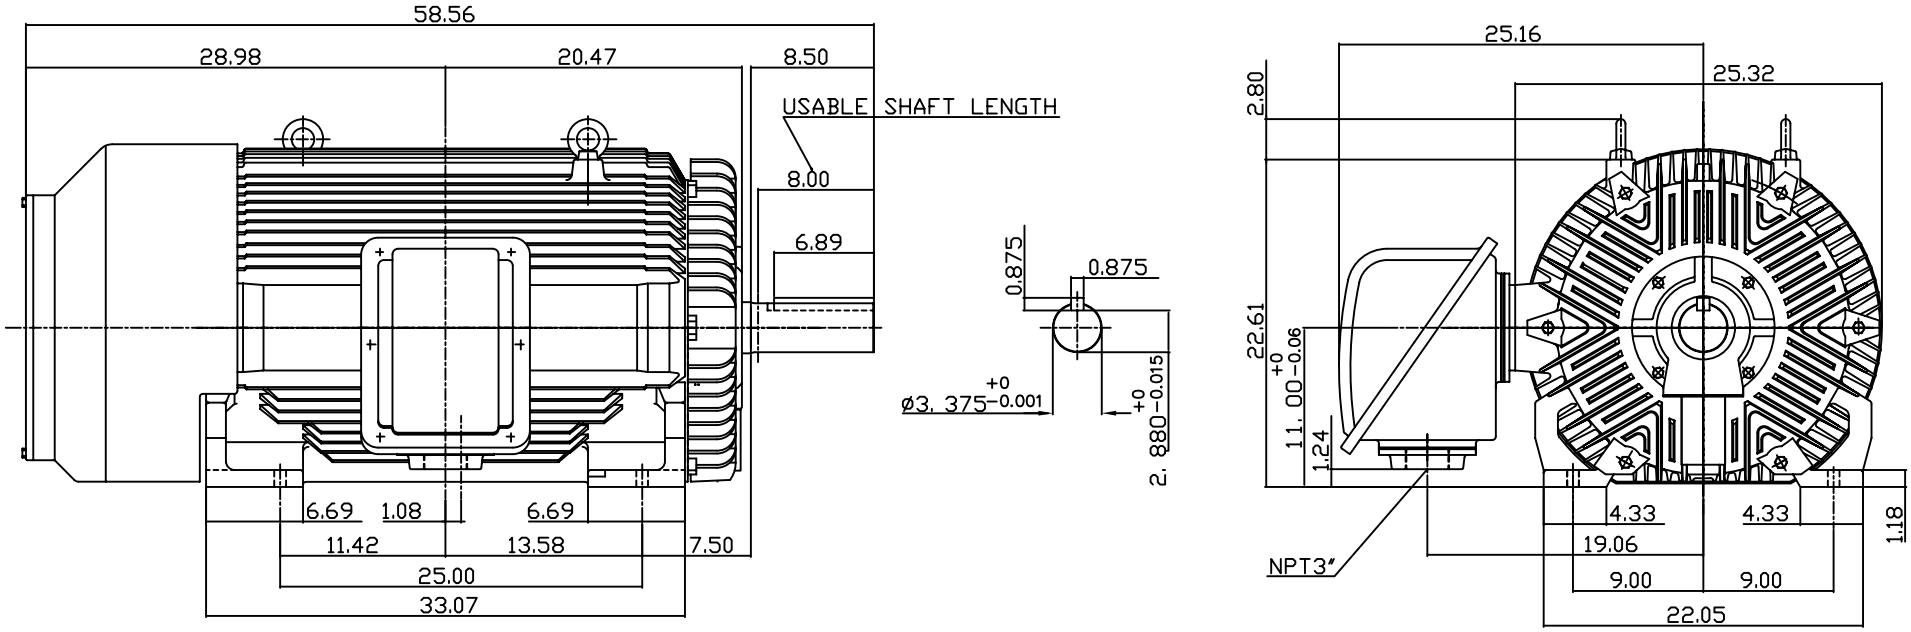

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO. 449T
3. F CLASS INSULATION, S.F.1.0
4. FOR BELT DRIVE APPLICATIONS
5. BEARING SIZE: DRIVE END: NU320
   NON-DRIVE END: 6316
6. MOTOR APPROX. WEIGHT: 3350 LBS

TW-56C

DWN.	W.CHENG	MAY·10 2004
CHKD.	H.HUANG	MAY·10 2004
APPD.	C.WANG	MAY·10 2004

DATE MAY 10, 2004

CATALOG NO. EP3504R-50

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 3A040W799 REV: 00