


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
AEH8N	400	298	2	CDNT.	380	50	3000

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

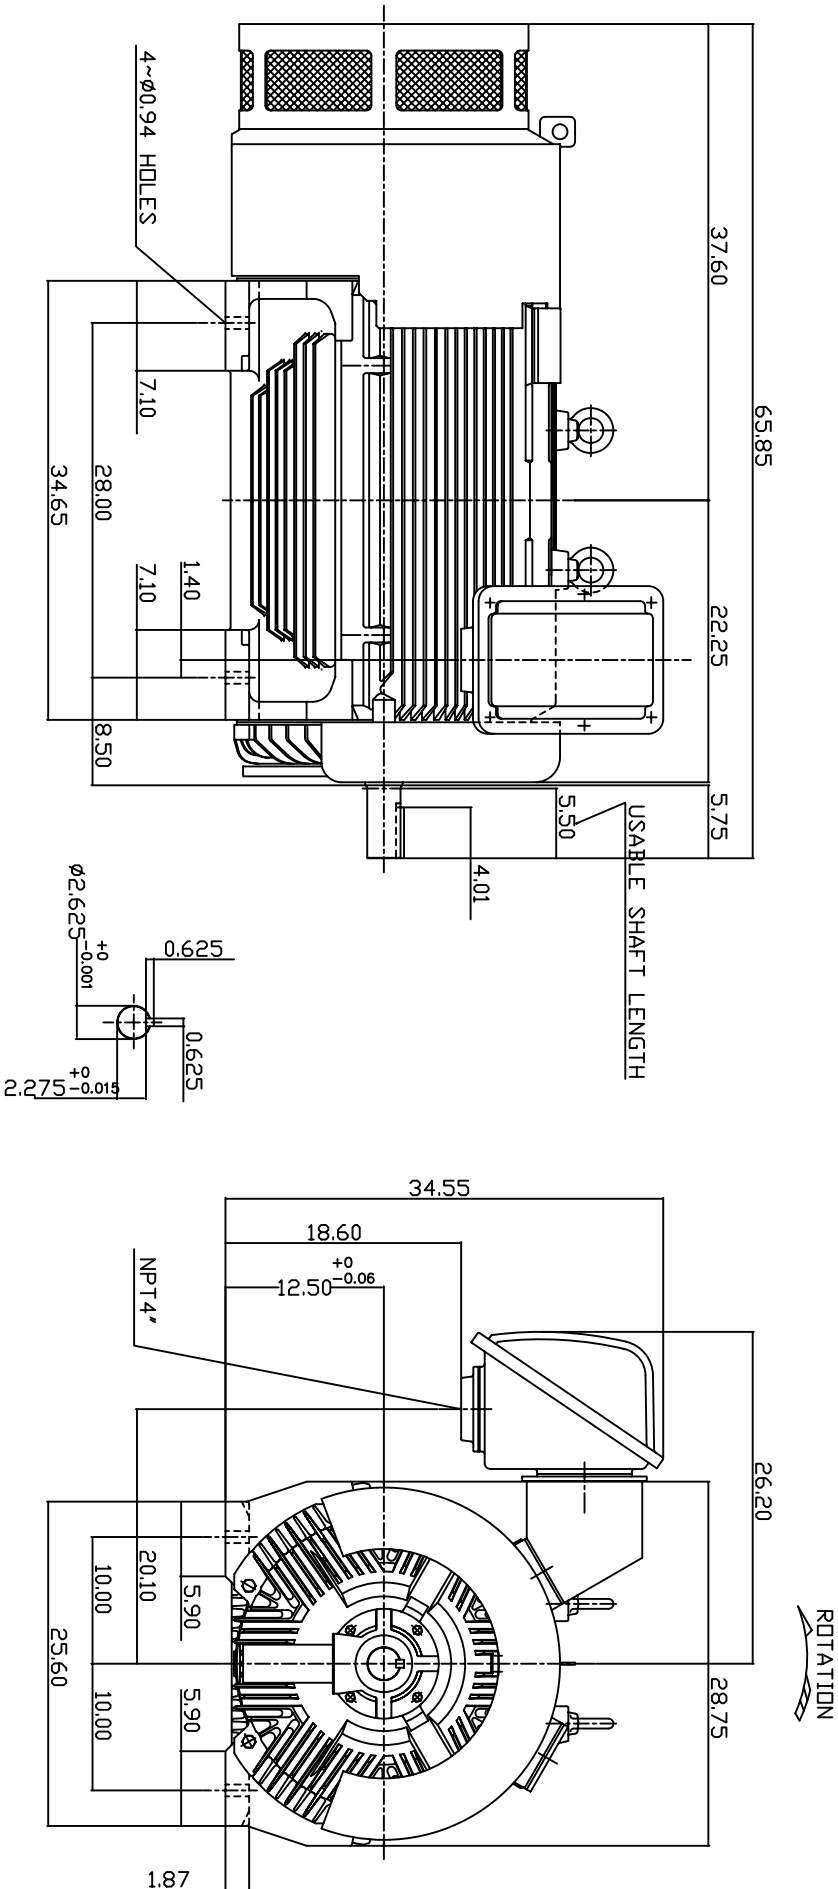

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO. 5009A
3. F CLASS INSULATION, S.F.1.0
4. FOR DIRECT FLEXIBLE COUPLING
5. BEARING SIZE: DRIVE END: 6315C3
NON-DRIVE END: 6315C3
6. MOTOR APPROX. WEIGHT: 3450 LBS

TW-56C

DWN.	W.LLIN	FEB-27-2003
CHKD.	W.LLIN	FEB-27-2003
APPD.	C.WANG	FEB-27-2003

DATE	APRIL 23, 2004	OUTLINE DIMENSIONS
CATALOG NO.	EP4002-50	3-PHASE INDUCTION MOTOR

TEC Westinghouse

DWG NO.

3A040T169

REV: 00