


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE	Hz	SYN SPEED R.P.M
	HP.	KW.					
AEH8N	450.	336	6	CONT.	380	50	1000

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

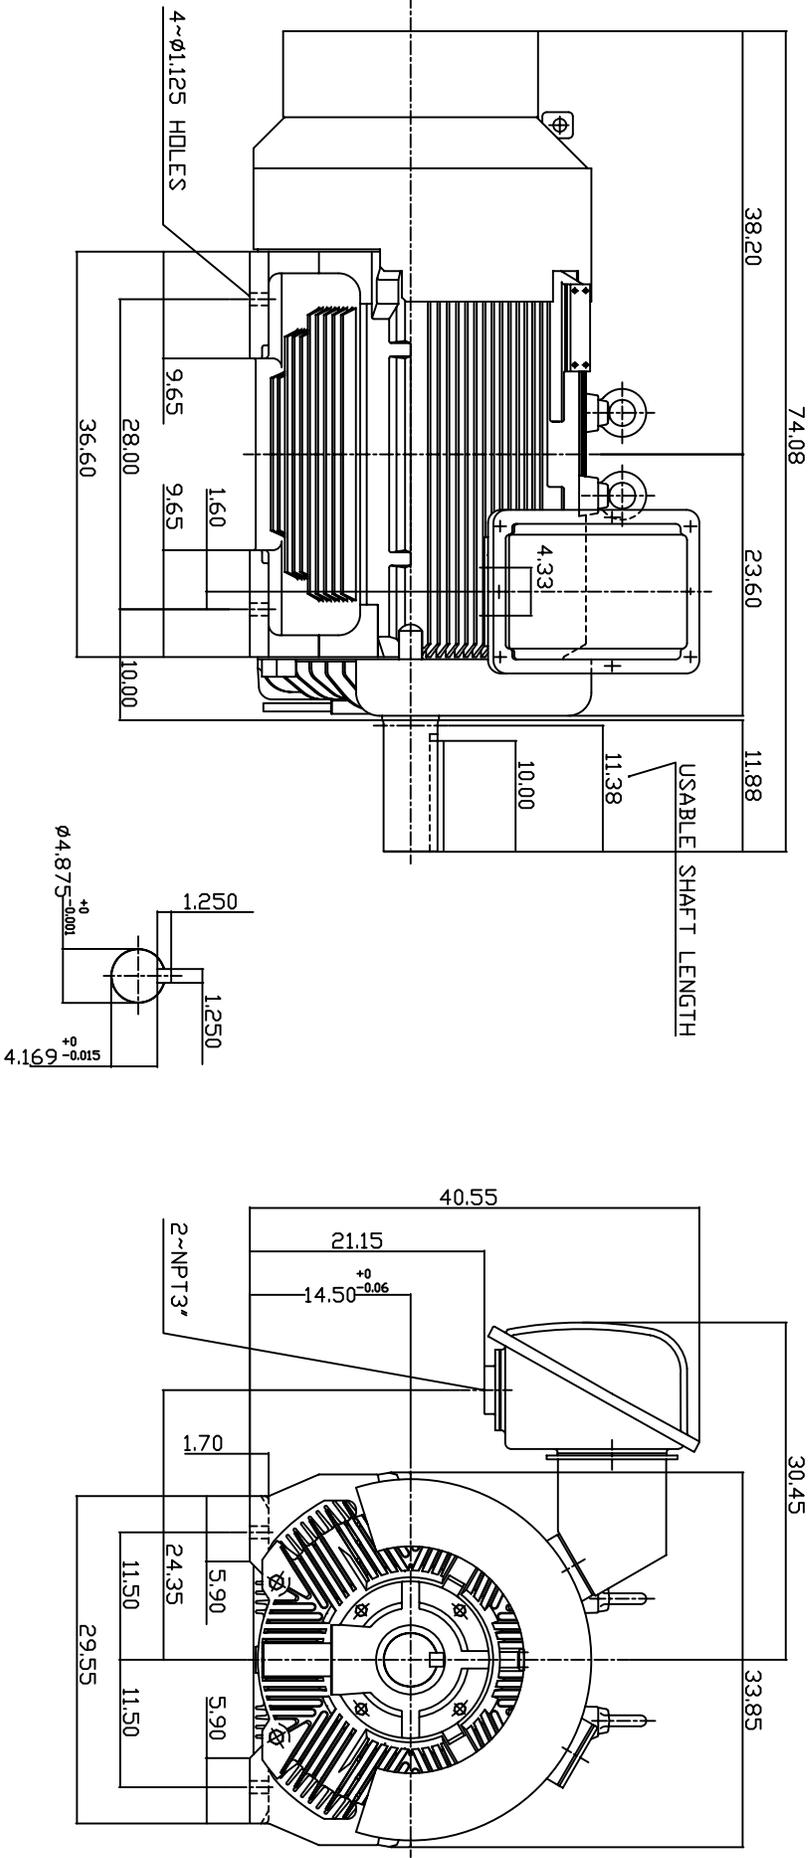

- NOTE:
1. DIMENSIONS IN INCH.
 2. FRAME NO. 5808C
 3. F CLASS INSULATION, S.F.1.0
 4. FDR BELT DRIVE APPLICATIONS
 5. BEARING SIZE: DRIVE END: NU326
NON-DRIVE END: 6322
 6. MOTOR APPROX. WEIGHT: 5250 LBS

TW-66C

DWN.	W.LLIN	MAR-04-2003	DATE	APRIL 26, 2004
CHKD.	W.LLIN	MAR-04-2003	CATALOG NO.	EP4506R-503-PHASE INDUCTION MOTOR
APPD.	C.WANG	MAR-04-2003	OUTLINE DIMENSIONS	DWG NO. 3A040T184-1

TEC Westinghouse

REV: 00