
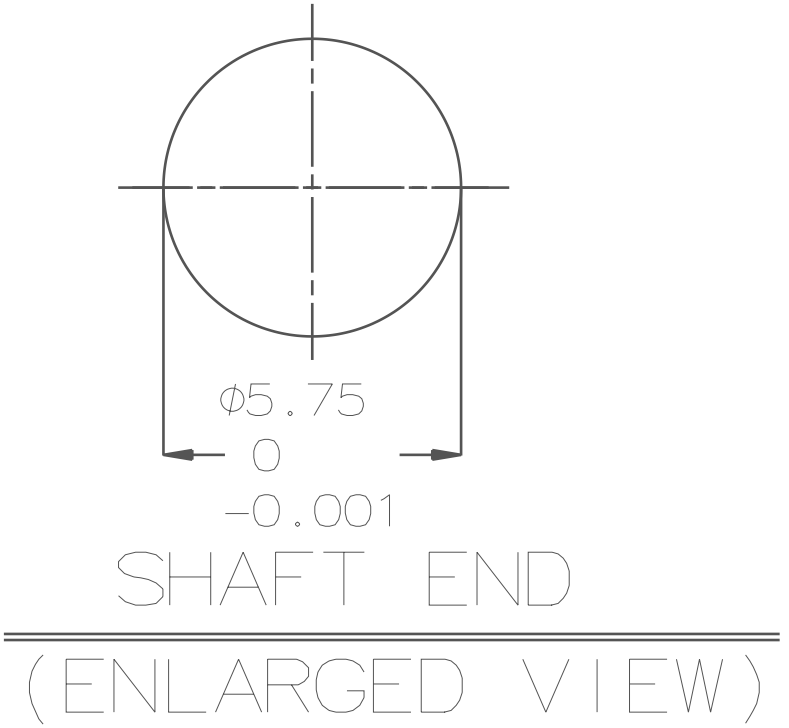
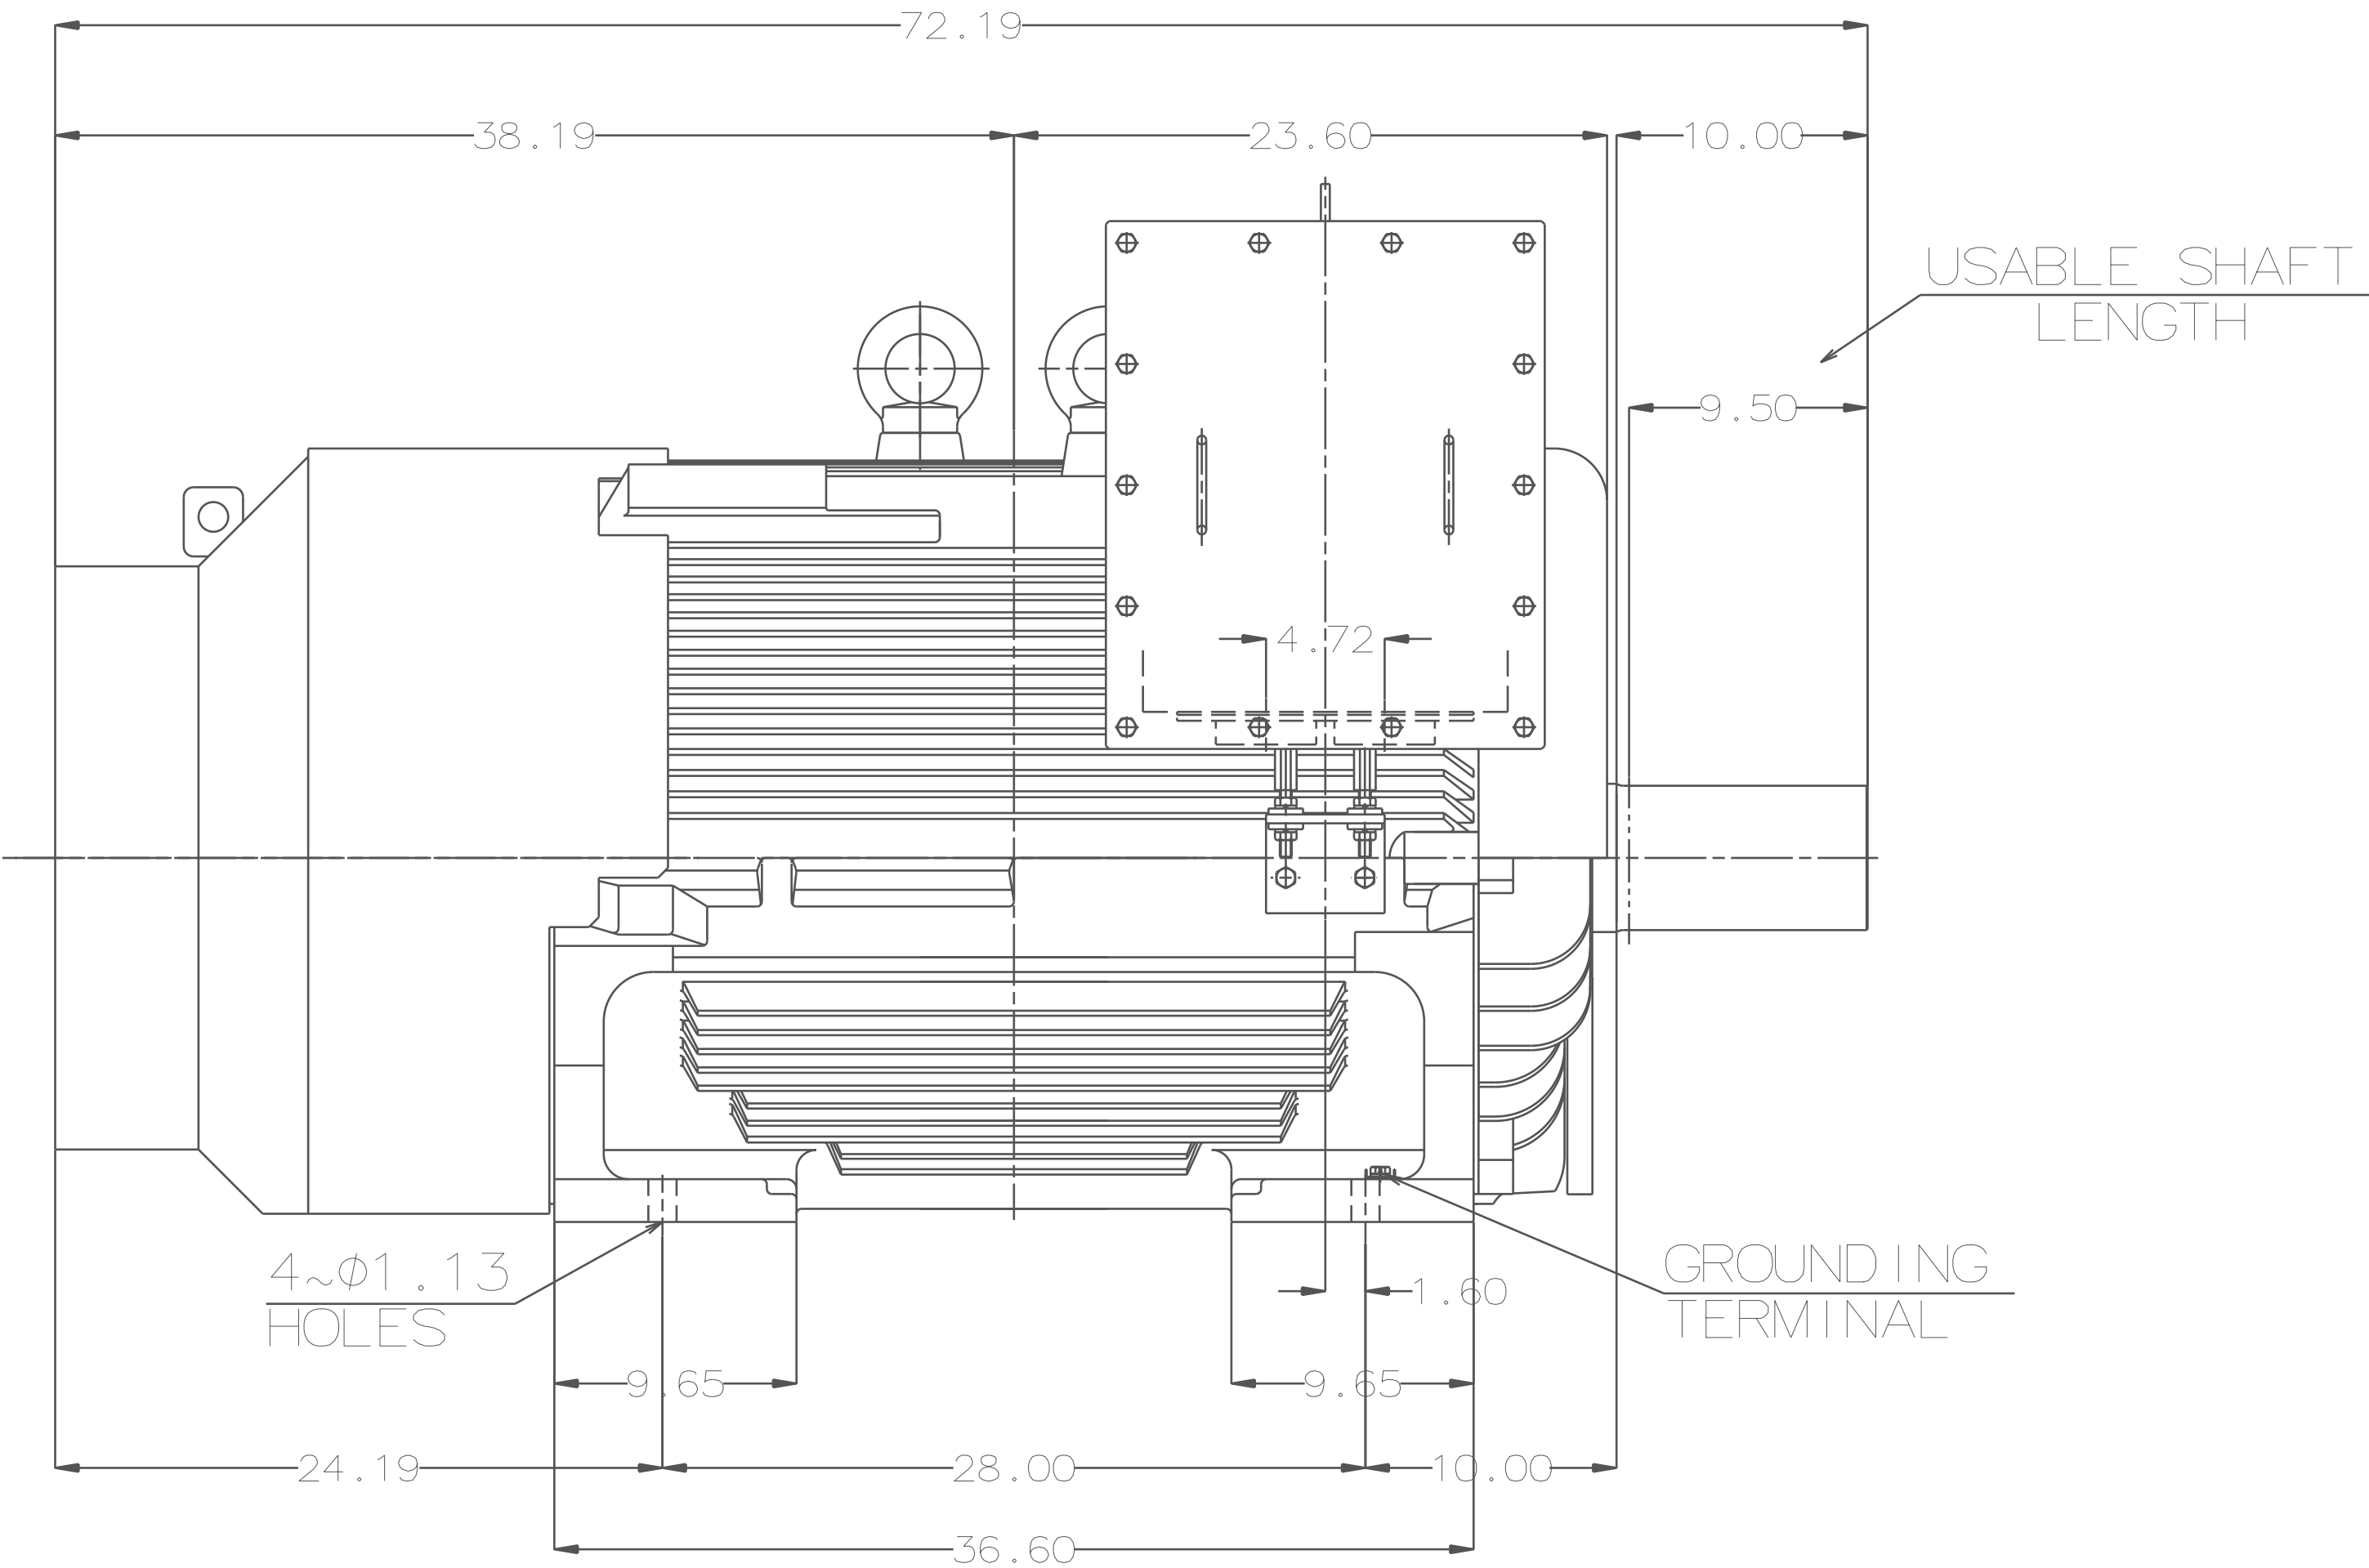


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP.	kW.					
AEHHSY	400	298.4	8	CONT.	460	60	900

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

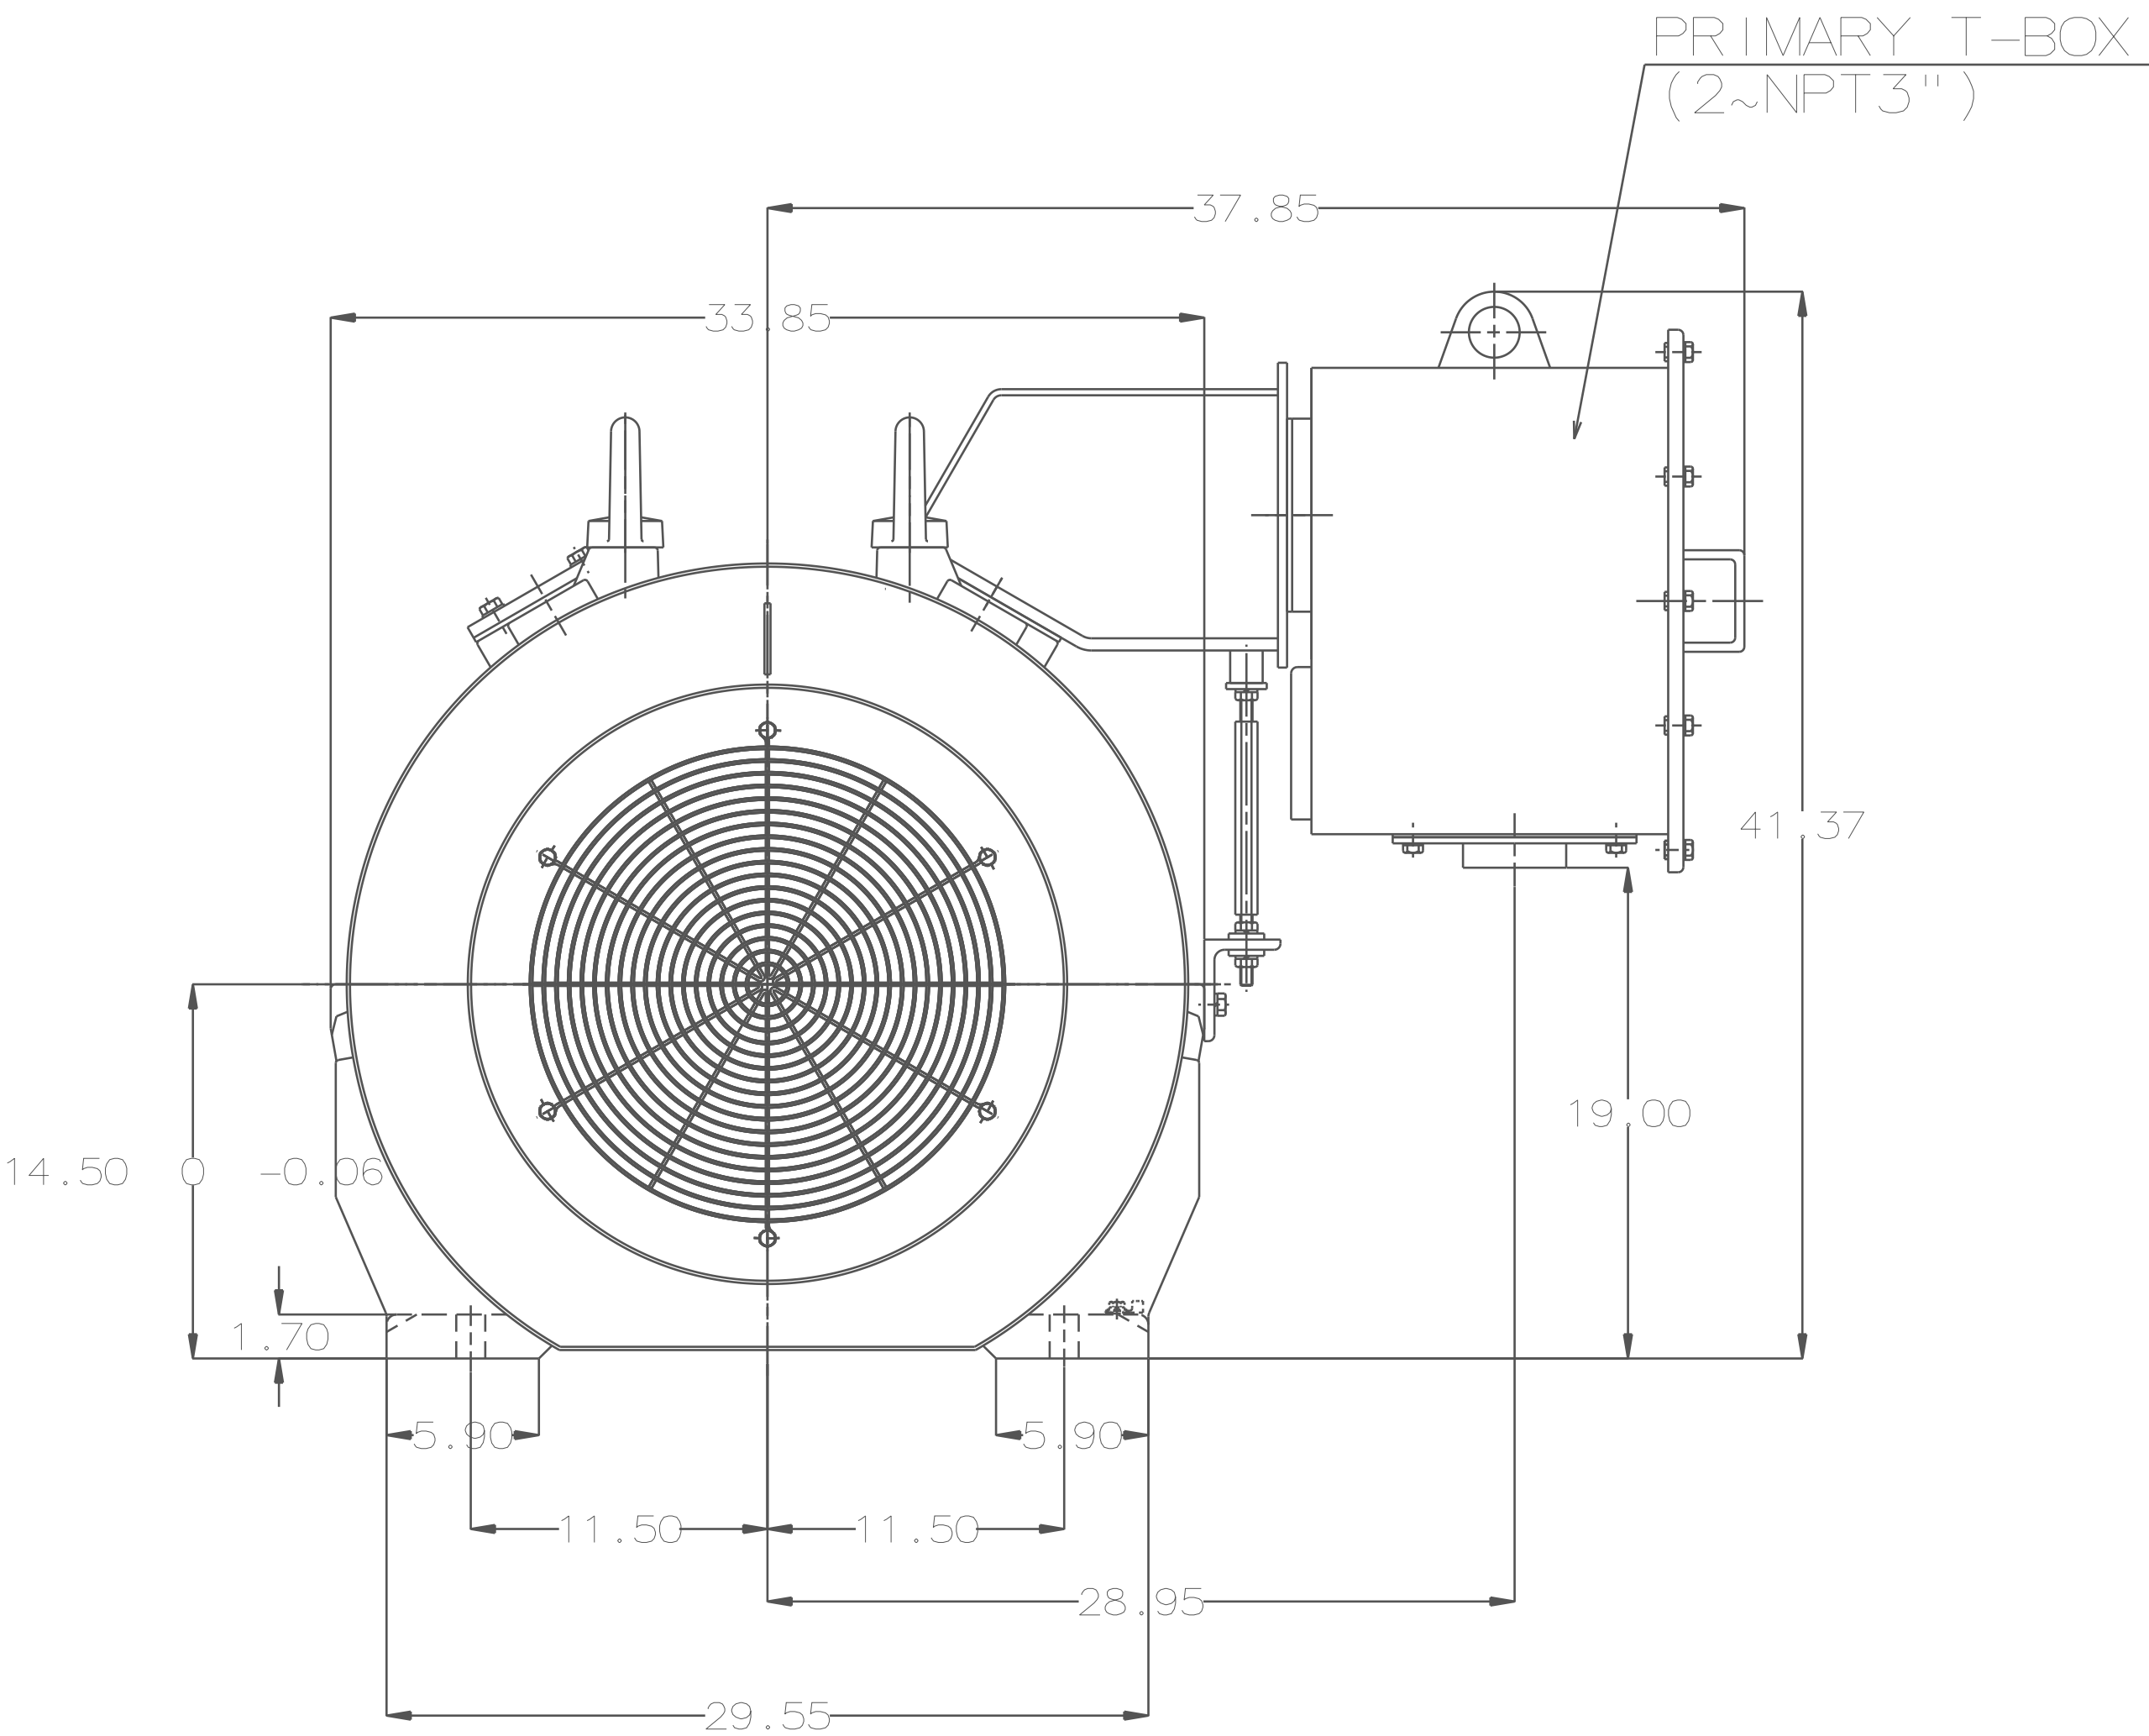

- NOTE:
1. DIMENSIONS IN inch
 2. FRAME NO. 5808UZ
 3. F CLASS INSULATION, S.F.1.15
 4. FOR DIRECT FLEXIBLE COUPLING
 5. ENCLOSURE: IP55
 6. BEARING SIZE: DRIVE-END 6330C3
OPP. DRIVE-END 6322C3
 7. MOTOR APPROX. WEIGHT: 5100 LBS

DWN.	J. CHANG	MAR. 05. 2015
CHKD.	H. HUANG	MAR. 05. 2015
APPD.	C. L IU	MAR. 05. 2015

DATE	12/7/15	OUTLINE DIMENSIONS	
CATALOG # EPY4008		3-PHASE INDUCTION MOTOR	
TEC   Westinghouse		DWG NO.	REV:00
		4B040G896	