
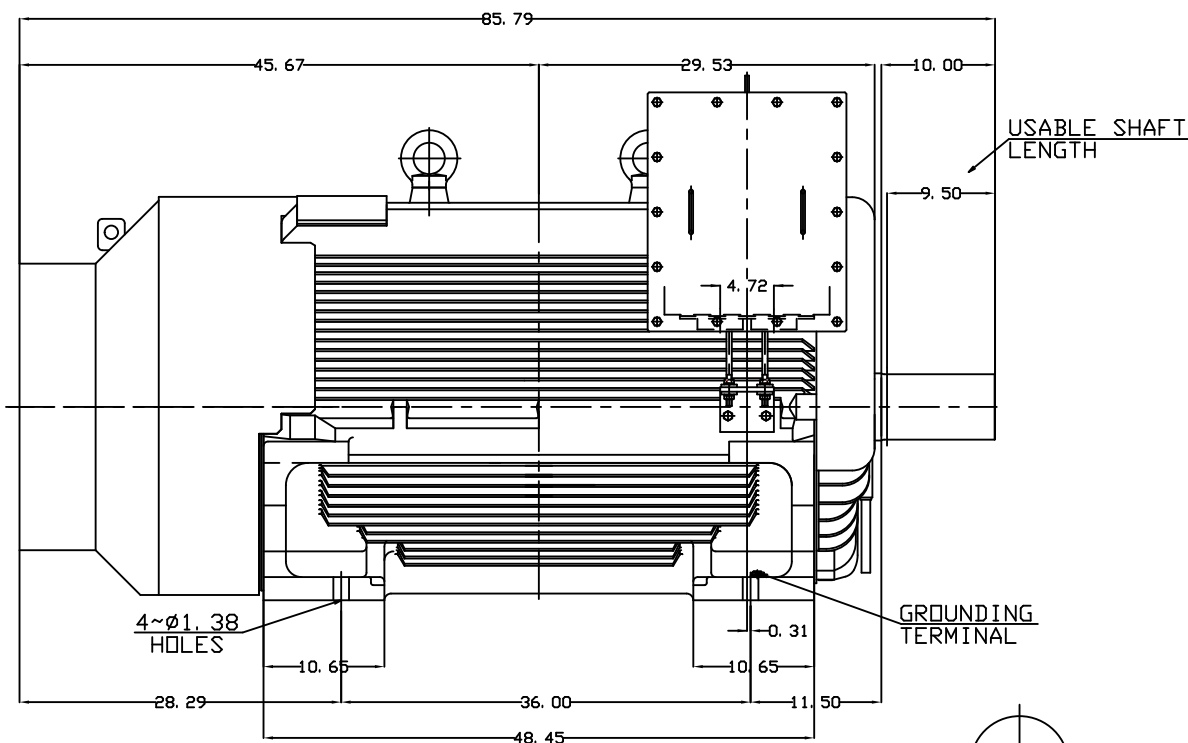


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R. P. M
	HP.	kW.					
AEHE-SY	600	447.6	8	CONT	460	60	900


TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

PRIMARY T-BOX
(2~NPT3")

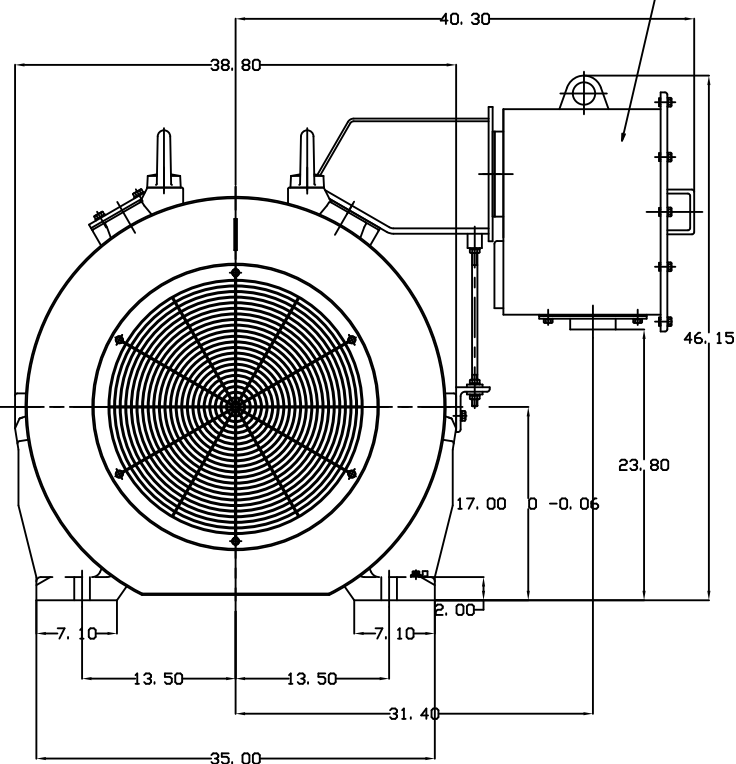

USABLE SHAFT LENGTH

GROUNDING TERMINAL



SHAFT END
(ENLARGED VIEW)

NOTE:

1. DIMENSIONS IN inch
2. FRAME NO. 6808UZ
3. F CLASS INSULATION, S.F. 1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP55
6. BEARING SIZE: DRIVE-END 6330C3
OPP. DRIVE-END 6322C3
7. MOTOR APPROX. WEIGHT: 8050 LBS

DATE		12/7/15		OUTLINE DIMENSIONS	
CATALOG # EY6008		3-PHASE INDUCTION MOTOR			
TEC		Westinghouse		DWG NO. REV: 00	
				4B040G901	