
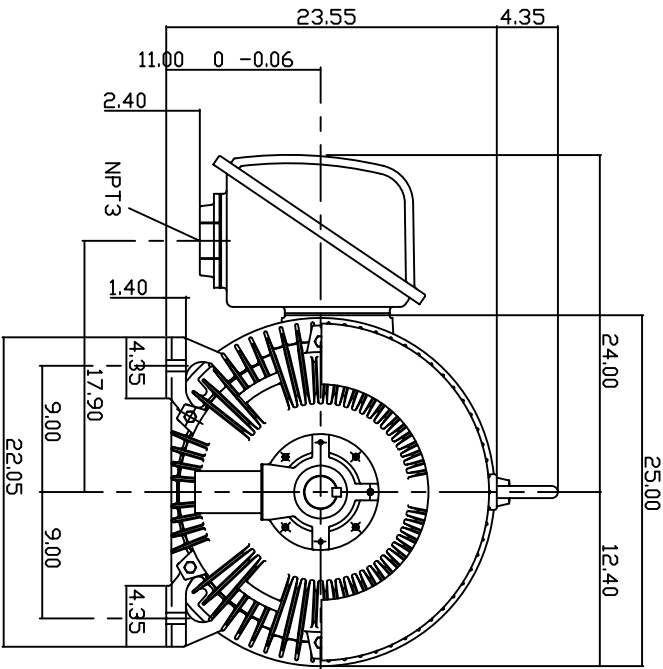



TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
AEHH	125	93.3	2	CONT.	460	60	3600

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

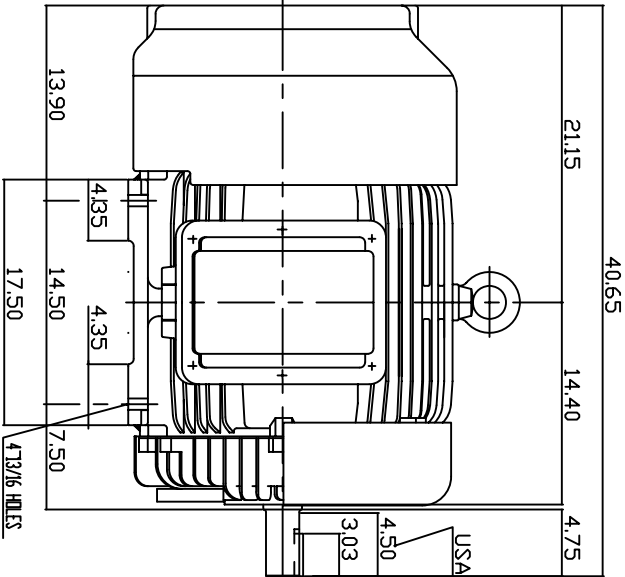

NOTE:

- 1. DIMENSIONS IN INCH
- 2. FRAME NO. 444TS
- 3. F CLASS INSULATION, S.F.1.15
- 4. FOR DIRECT FLEXIBLE COUPLING
- 5. ENCLOSURE: IP55
- 6. BEARING SIZE: DRIVE END: 6314C3
NON-DRIVE END: 6314C3
- 7. APPROX. WEIGHT: 1600 LBS
- 8. NON-SPARKING FAN.
- 9. NOISE: BELOW 83 DBA AT 1 METER, NO LOAD.

TW-56C

DWN.	T.H.Pan	FEB 18 2005
CHKD.	H.HUANG	FEB 18 2005
APPD.	C.WANG	FEB 18 2005

DATE 06-20-05	OUTLINE DIMENSIONS	
CATALOG #HH1252	3-PHASE INDUCTION MOTOR	
TEC  Westinghouse 		DWG NO. REV: 00
		3A040Y697