


| TYPE | OUTPUT |       | POLE | TIME<br>RATING | VOLTAGE<br>V | Hz | SYN.SPEED<br>R.P.M |
|------|--------|-------|------|----------------|--------------|----|--------------------|
|      | HP.    | KW.   |      |                |              |    |                    |
| AEHH | 250    | 186.5 | 6    | CONT.          | 380          | 50 | 1000               |

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

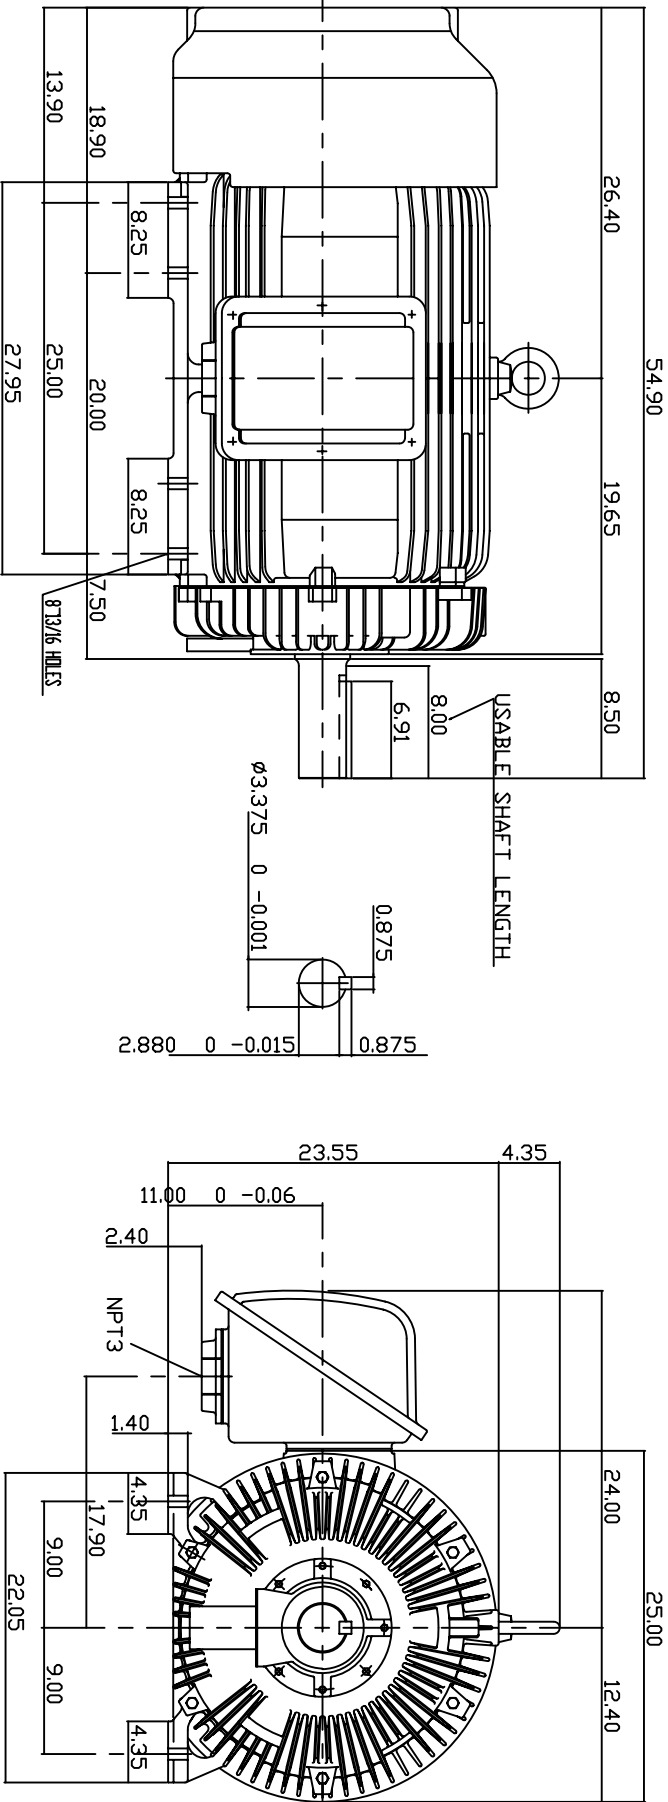

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 449T
3. F CLASS INSULATION, S.F.10
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP55
6. BEARING SIZE: DRIVE END: 6320C3  
NON-DRIVE END: 6316C3
7. APPROX. WEIGHT: 2880 LBS
8. NON-SPARKING FAN.
9. NOISE: BELOW 83 DBA AT 1 METER, NO LOAD.

TW-56C

|       |         |             |
|-------|---------|-------------|
| DWN.  | T.H.Pan | FEB 18 2005 |
| CHKD. | H.HUANG | FEB 18 2005 |
| APPD. | C.WANG  | FEB 18 2005 |

| DATE            |  | OUTLINE DIMENSIONS      |  |
|-----------------|--|-------------------------|--|
| 06-20-05        |  | 3-PHASE INDUCTION MOTOR |  |
| CAT. #HH2506-50 |  | Dwg NO. 3A040Y702       |  |
| REV. 00         |  |                         |  |