
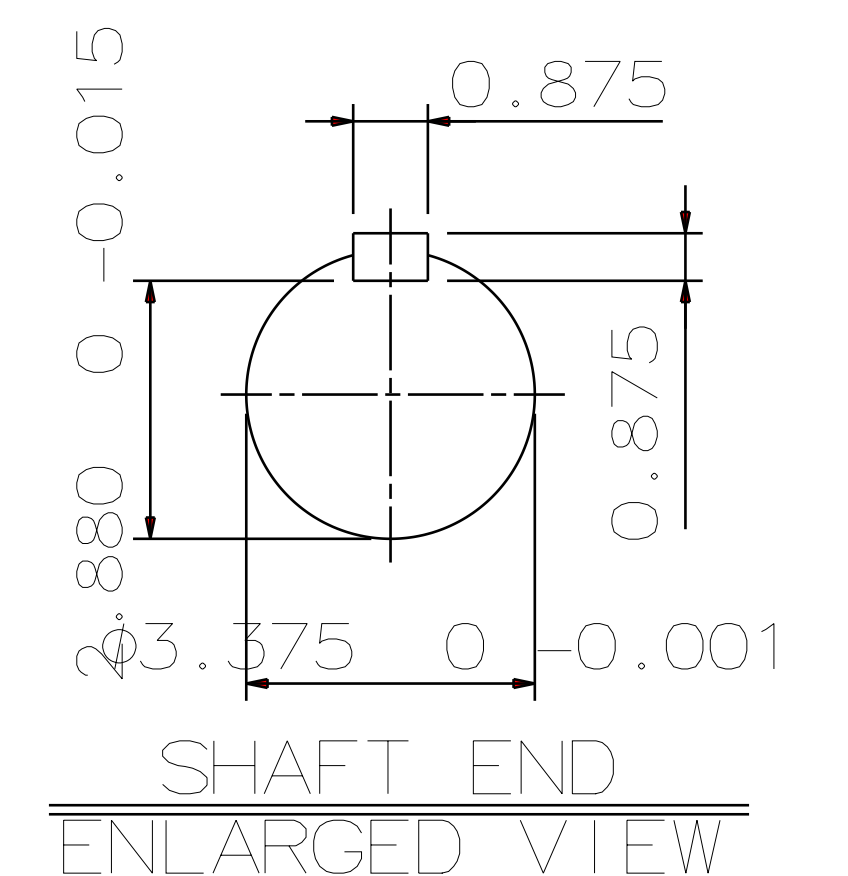
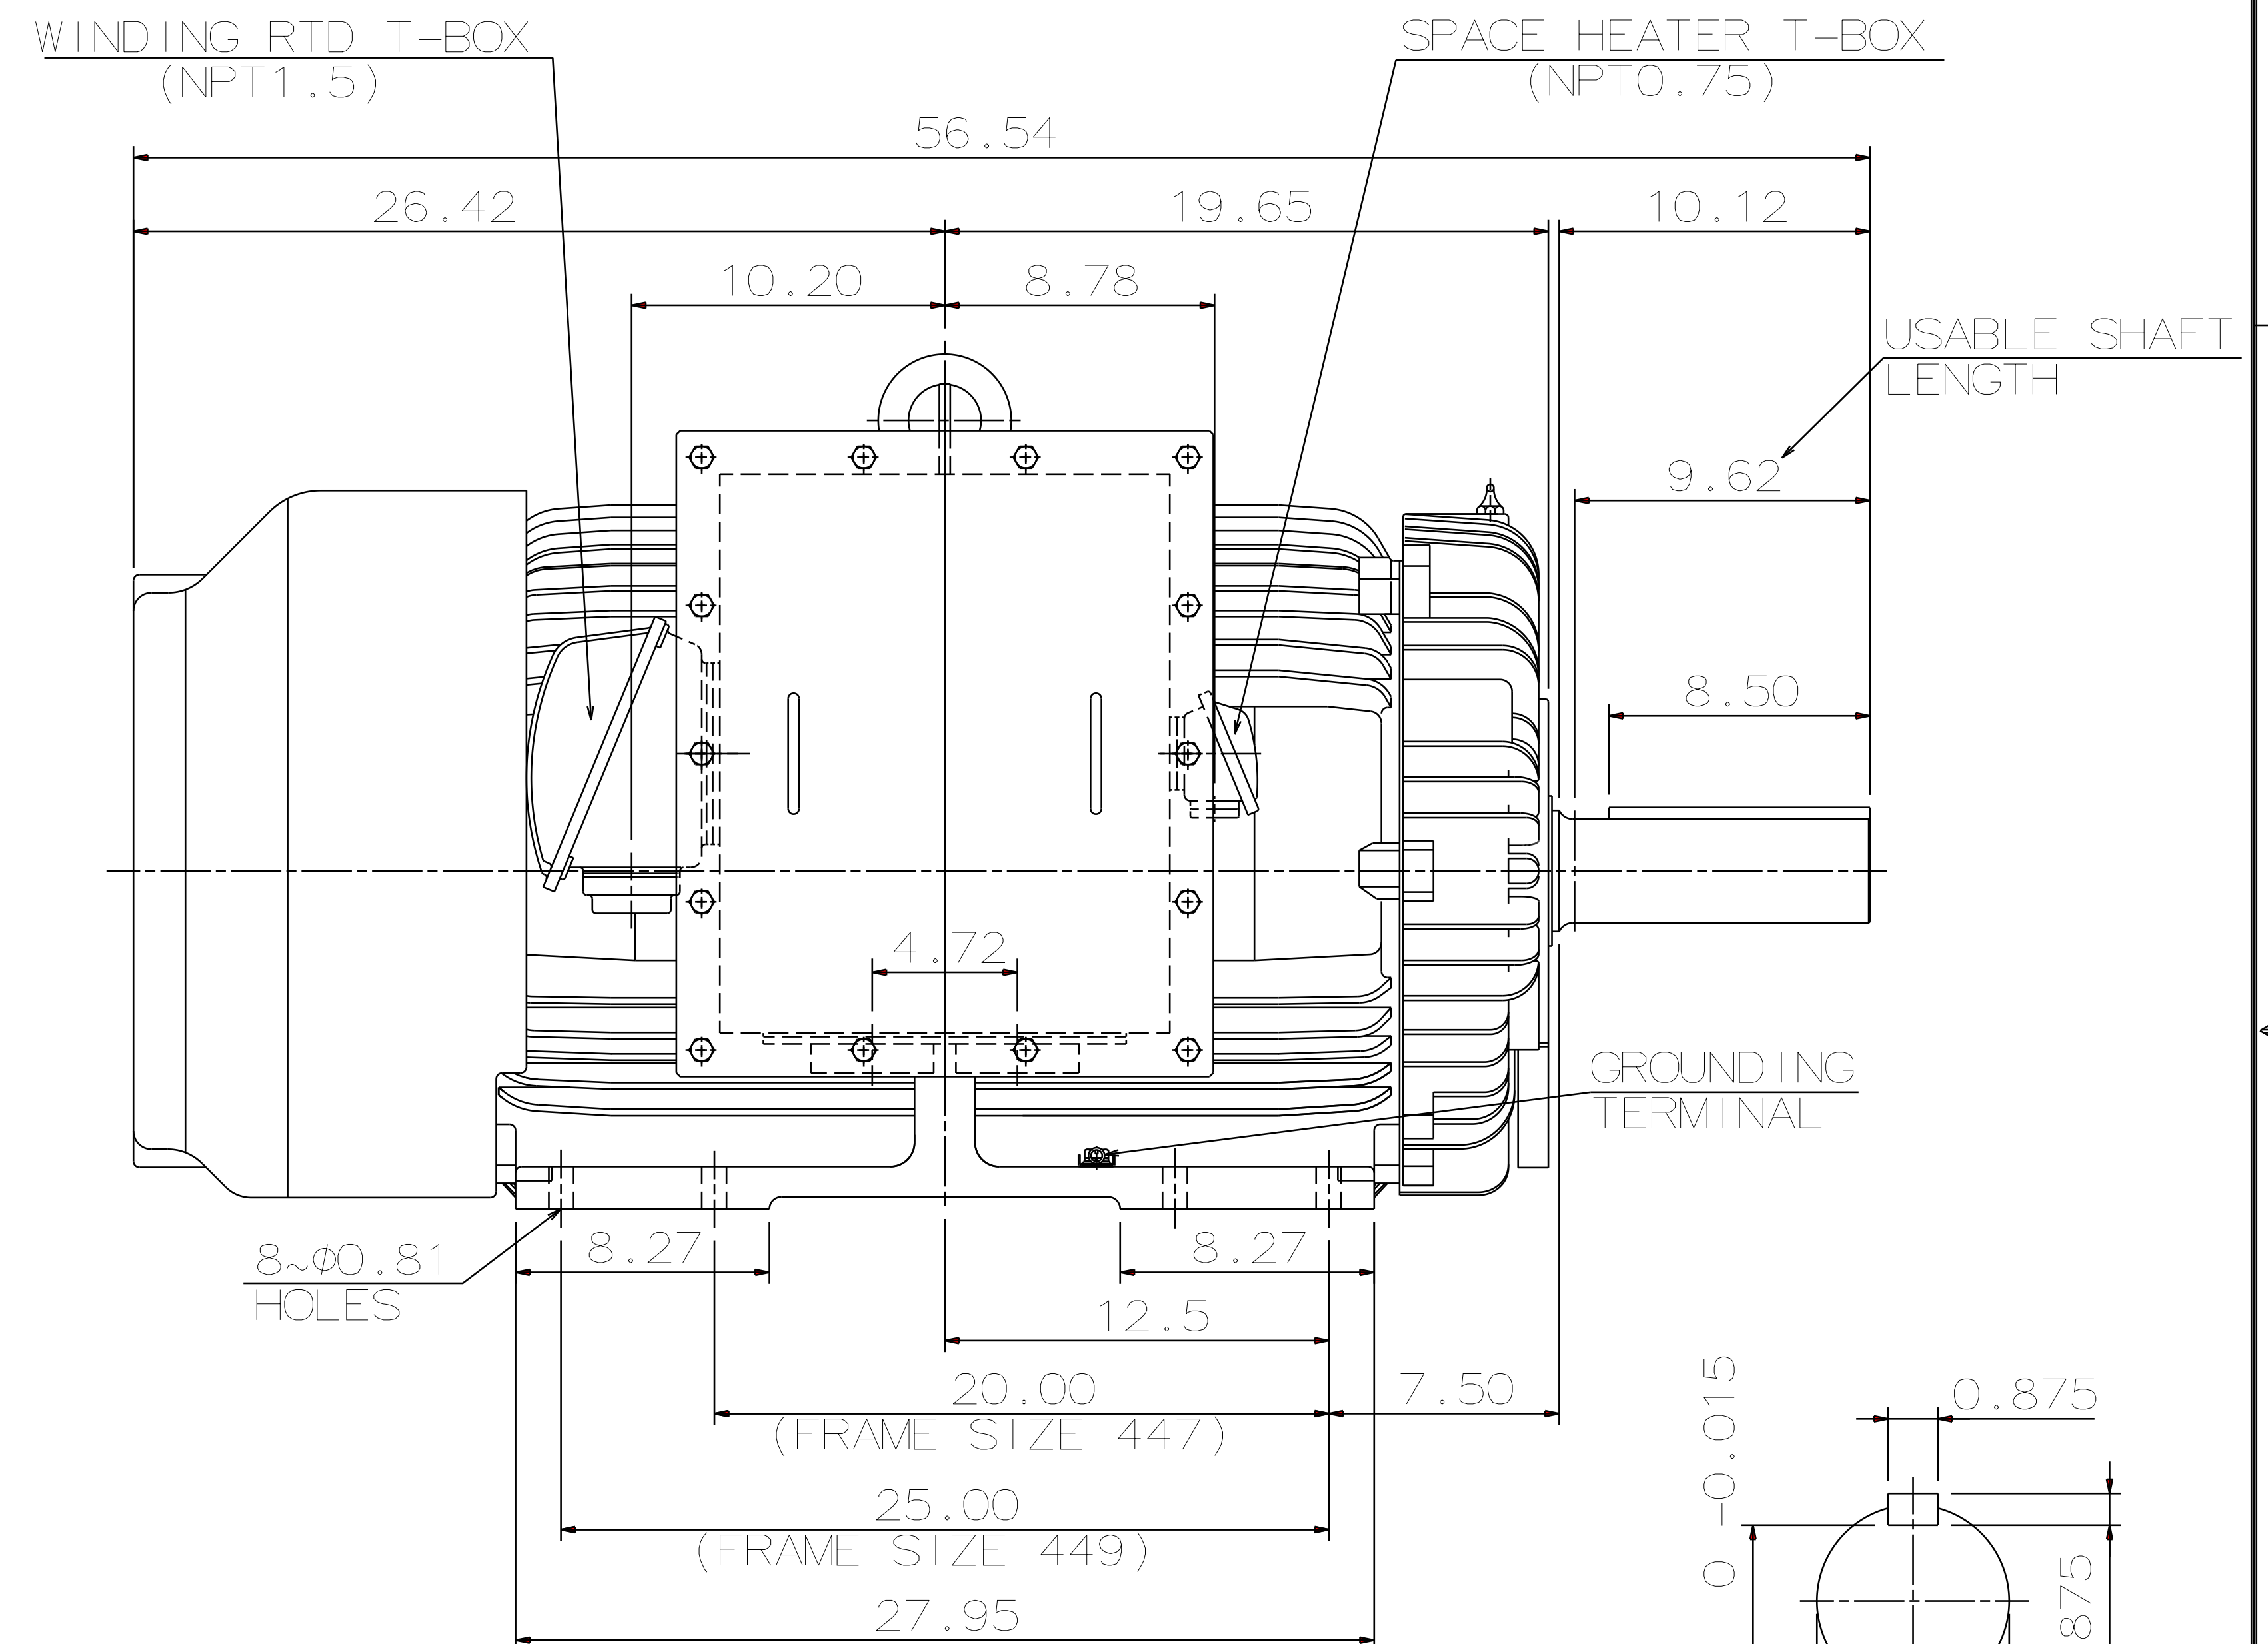


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP.	kW.					
AEHAGD	150	111.8	6	CONT.	2300/4000	60	1200

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

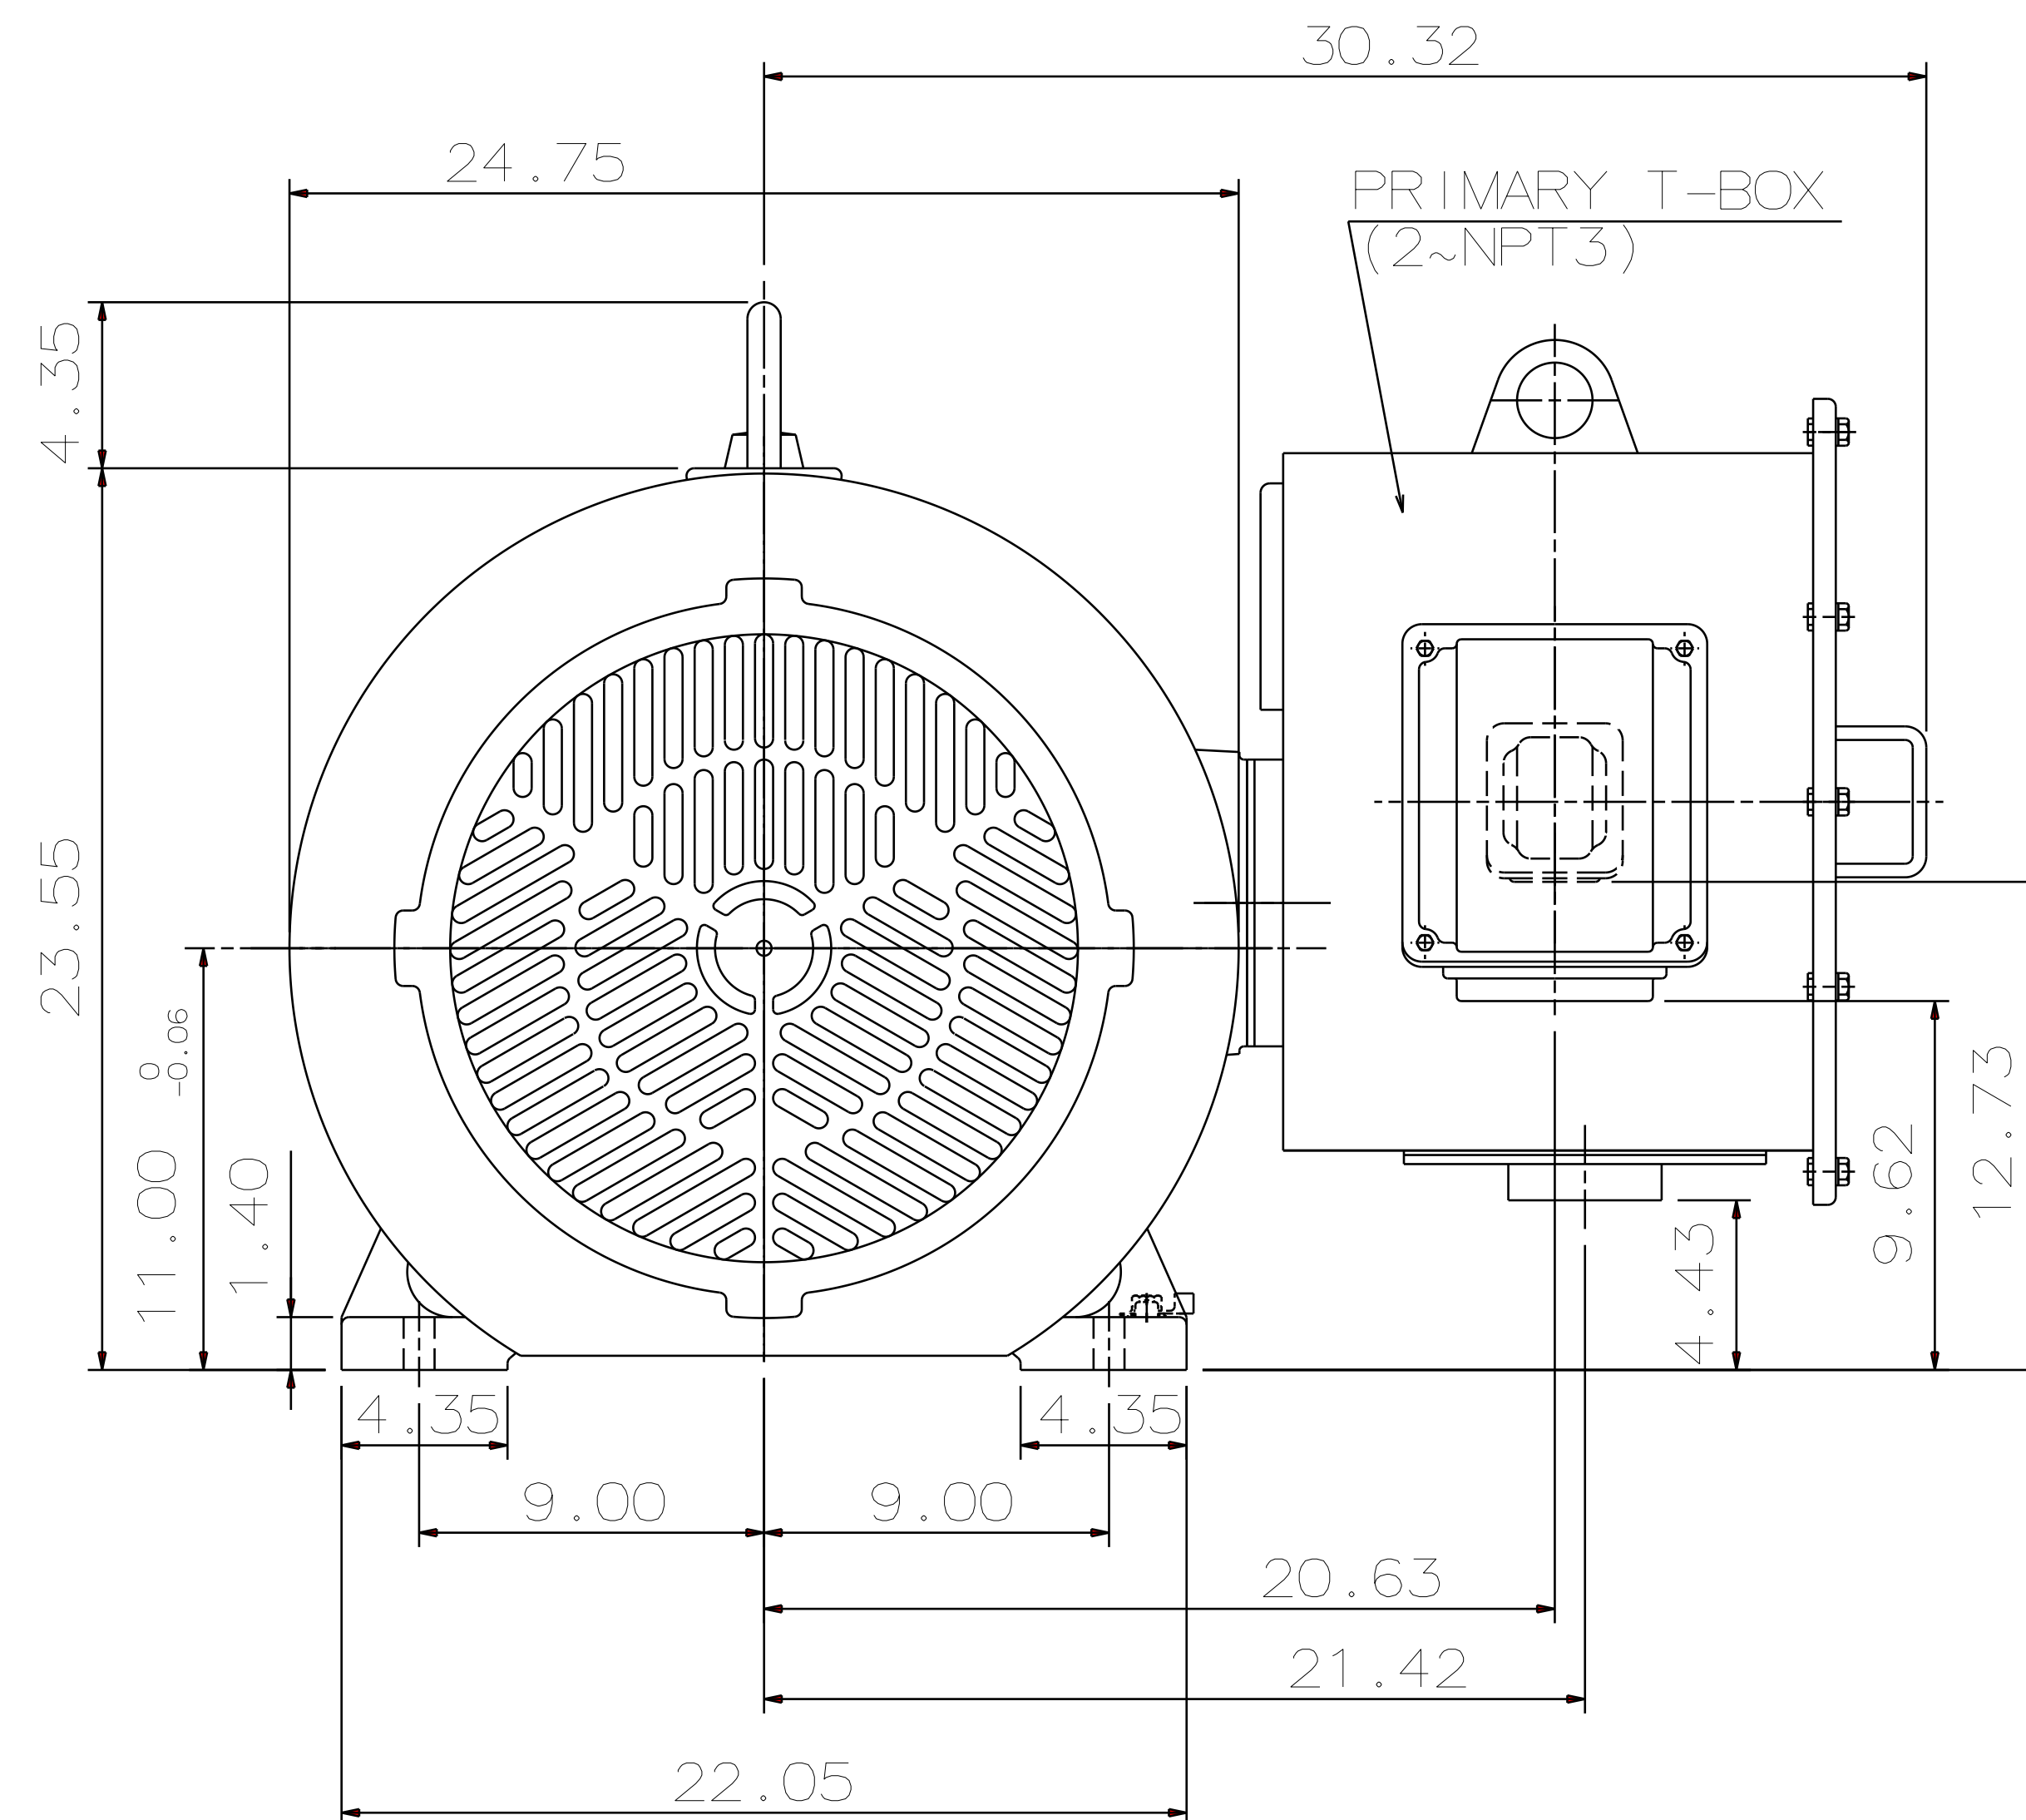

NOTE :

- NOTE:
1. DIMENSIONS IN inch
 2. FRAME NO. 449TZ
 3. F CLASS INSULATION, S.F.1.15
 4. FOR BELT DRIVE
 5. ENCLOSURE: IP55
 6. BEARING SIZE: DRIVE-END NU320C3
OPP. DRIVE-END 6316
 7. WITH WINDING RTD: PT 100Ω/0°C 6PCS
 8. WITH SPACE HEATER: SINGLE PHASE,120V
 9. NON-SPARKING FAN
 10. CORROSION PROOF
 11. APPROXIMATE WEIGHT: 3,830 LBS

DWN .	J .CHANG	MAY .22 .2015
CHKD .	H .HUANG	MAY .22 .2015
APPD .	C .L IU	MAY .22 .2015

DATE DEC 08 2016

KD 1 506R

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

TEC   Westinghouse

DWG NO.	REV: 00
---------	---------

4B040M518