



TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AEHAGD	500	372.8	6	CONT.	2300/4000	60	1200

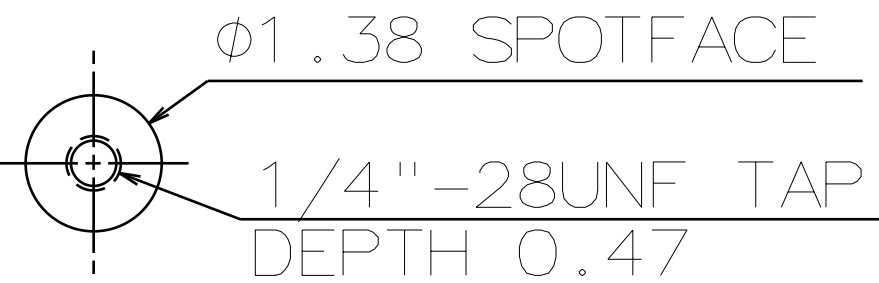


TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

DETAIL A
(PROVISION FOR VIBRATION SENSOR)

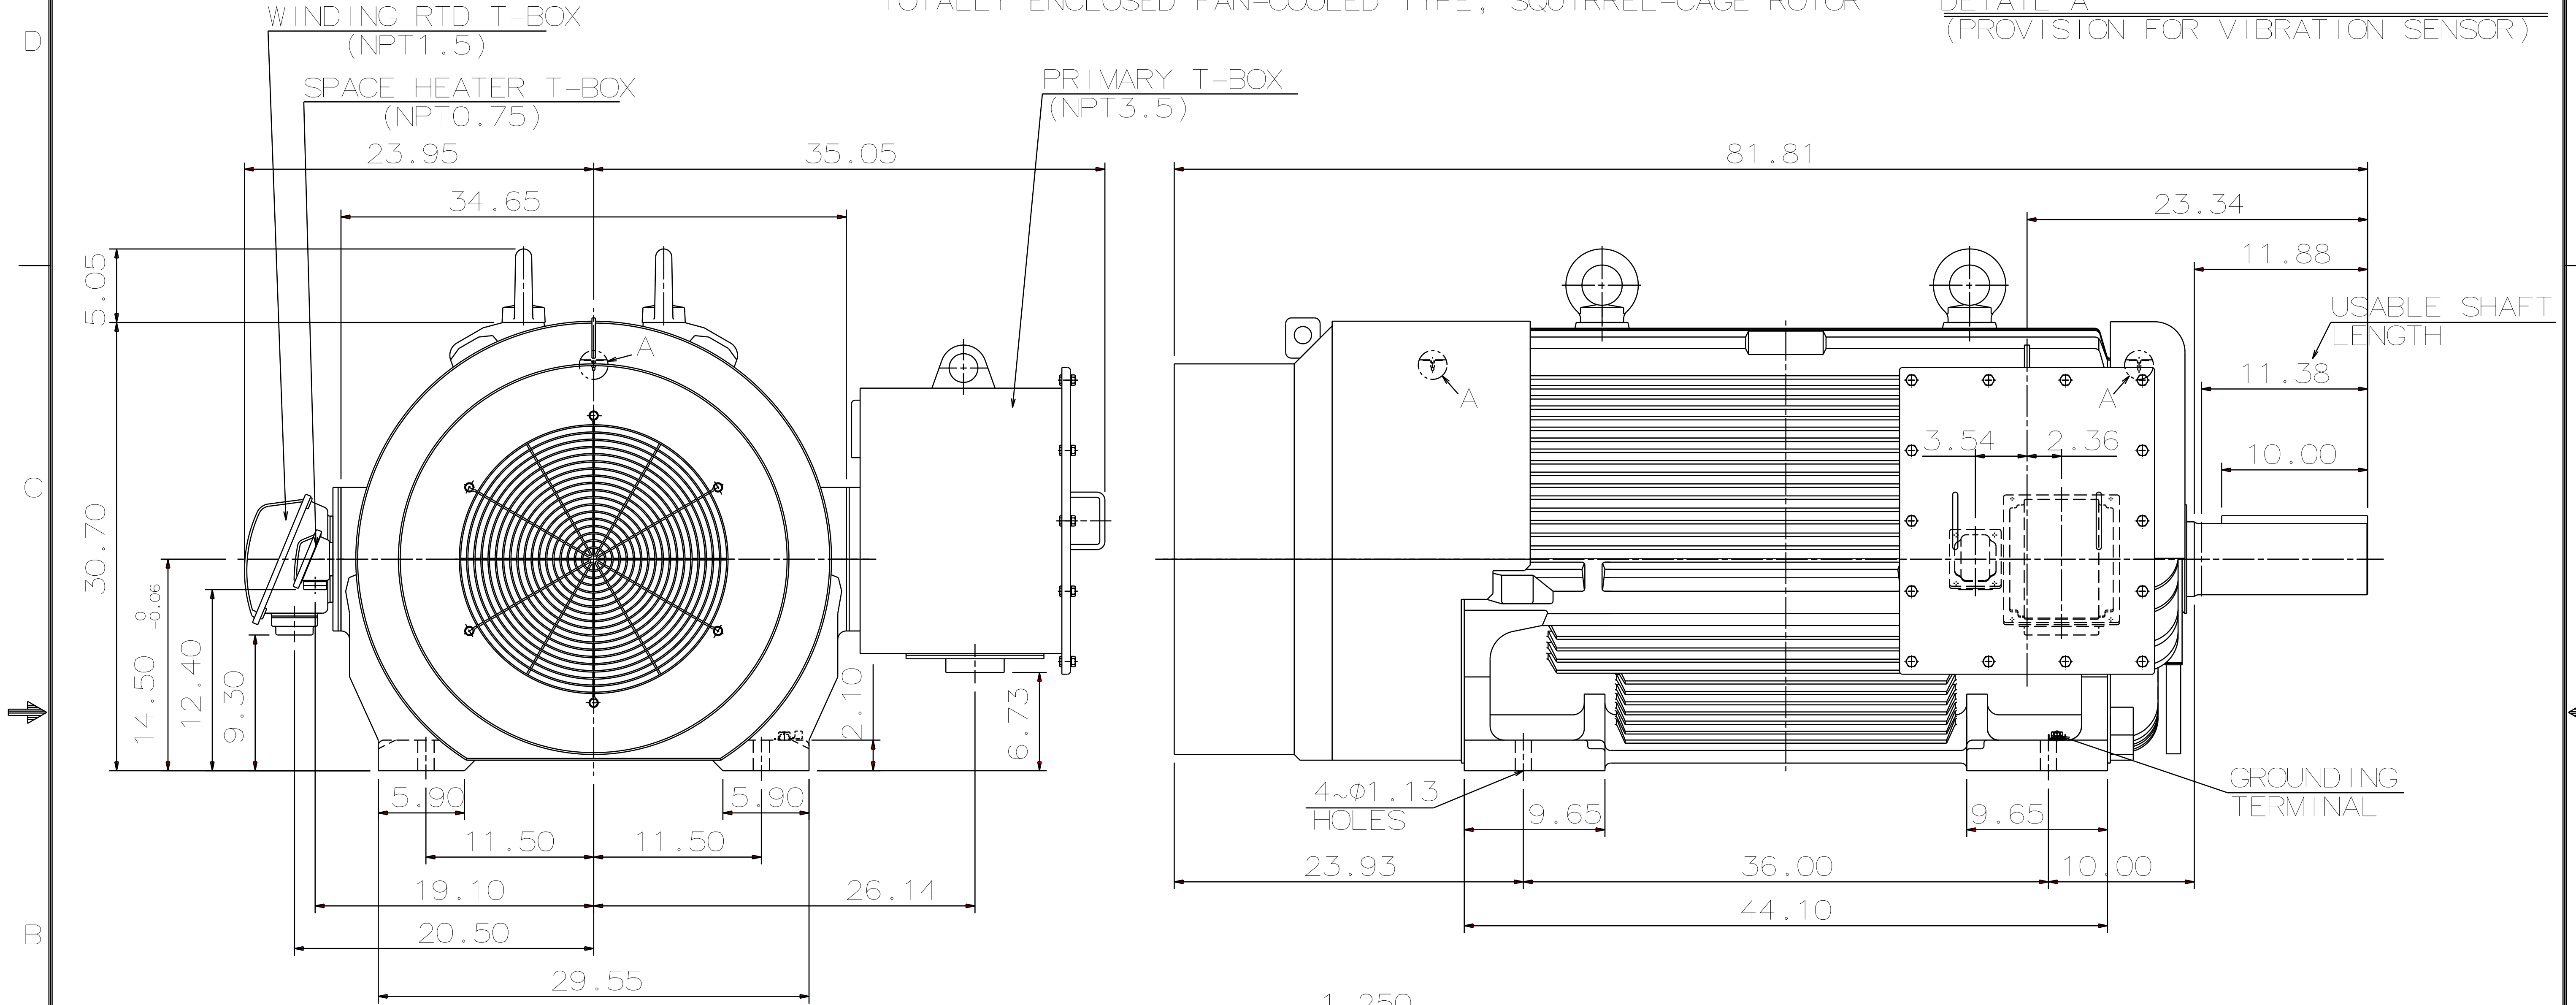

- NOTE:
- 1. DIMENSIONS IN inch
 - 2. FRAME NO. 5810C
 - 3. F CLASS INSULATION, S.F.1.15
 - 4. FOR BELT DRIVE
 - 5. ENCLOSURE: IP55
 - 6. BEARING SIZE: DRIVE-END NU326C3
OPP. DRIVE-END 6322
 - 7. WITH WINDING RTD: PT 100Ω/0°C 6PCS
 - 8. WITH SPACE HEATER: SINGLE PHASE, 120V
 - 9. PROVISION FOR BEARING RTD MOUNTING:
2~PT1/2" TAPS PER BRACKET
 - 10. NON-SPARKING FAN
 - 11. CORROSION PROOF
 - 12. APPROXIMATE WEIGHT: 5,710 LBS

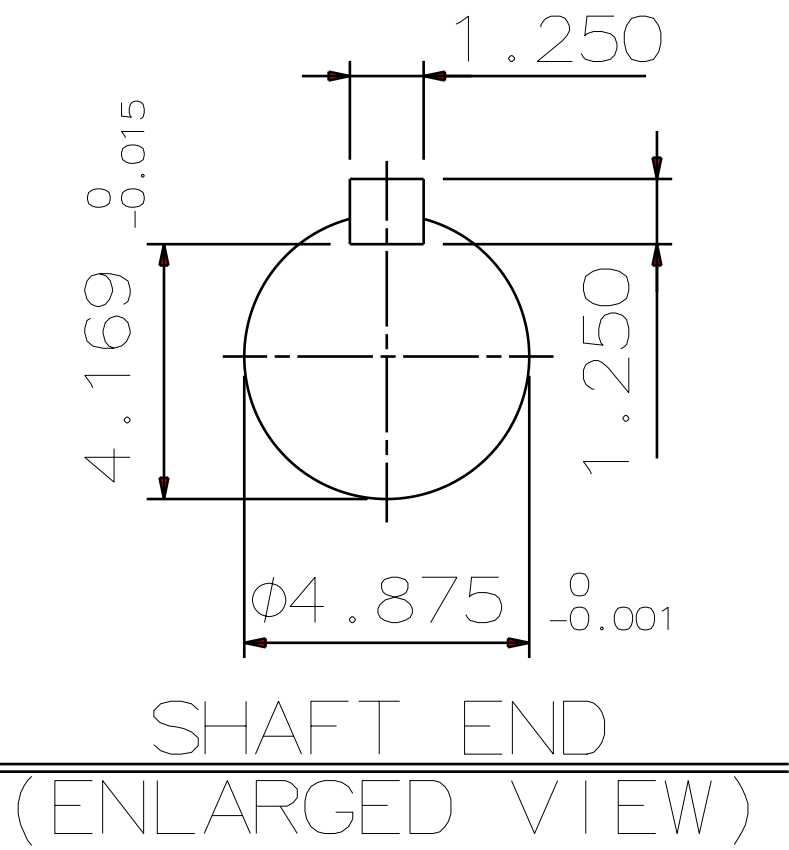

DWN.	J. CHANG	MAY.27.2015
CHKD.	H. HUANG	MAY.27.2015
APPD.	C. L IU	MAY.27.2015

DATE DEC 08 2016		OUTLINE DIMENSIONS	
KD5006R		3-PHASE INDUCTION MOTOR	
TEC Westinghouse		DWG NO.	REV:00
		4B040L397	