


6 5 4 3 2 1





DETAIL A

PROVISION FOR VIBRATION DETECTORS


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AFHGTK	600	447.6	8	CONT.	2300	60	900

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR.

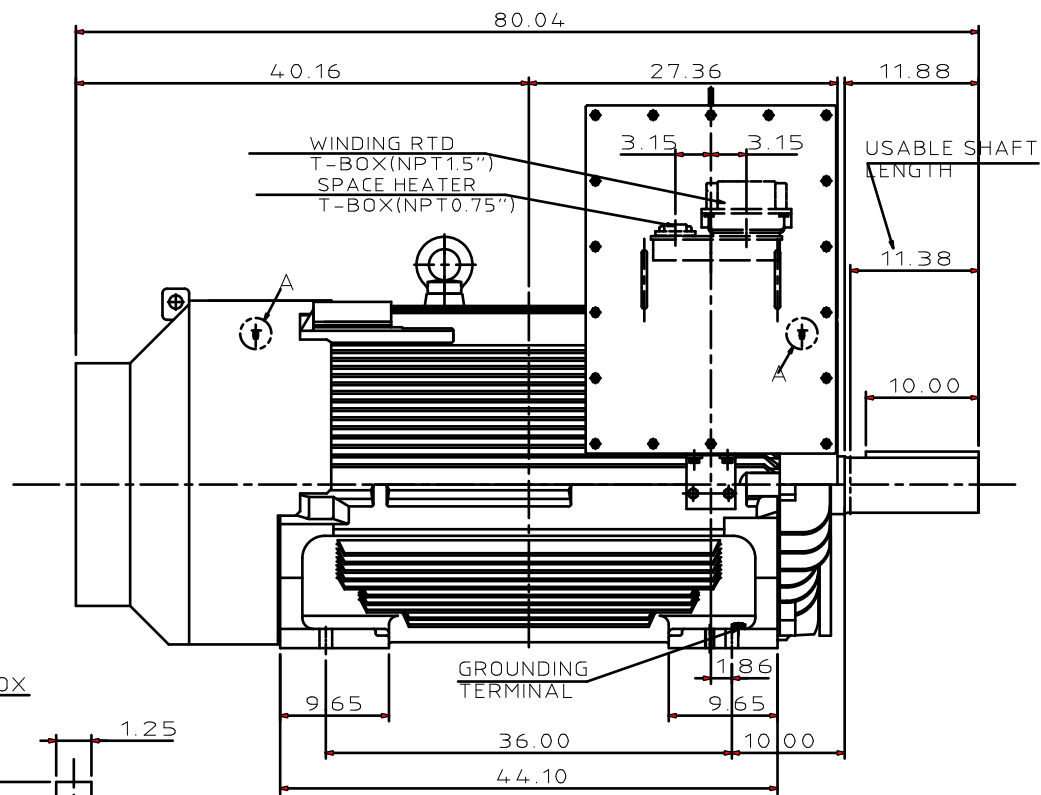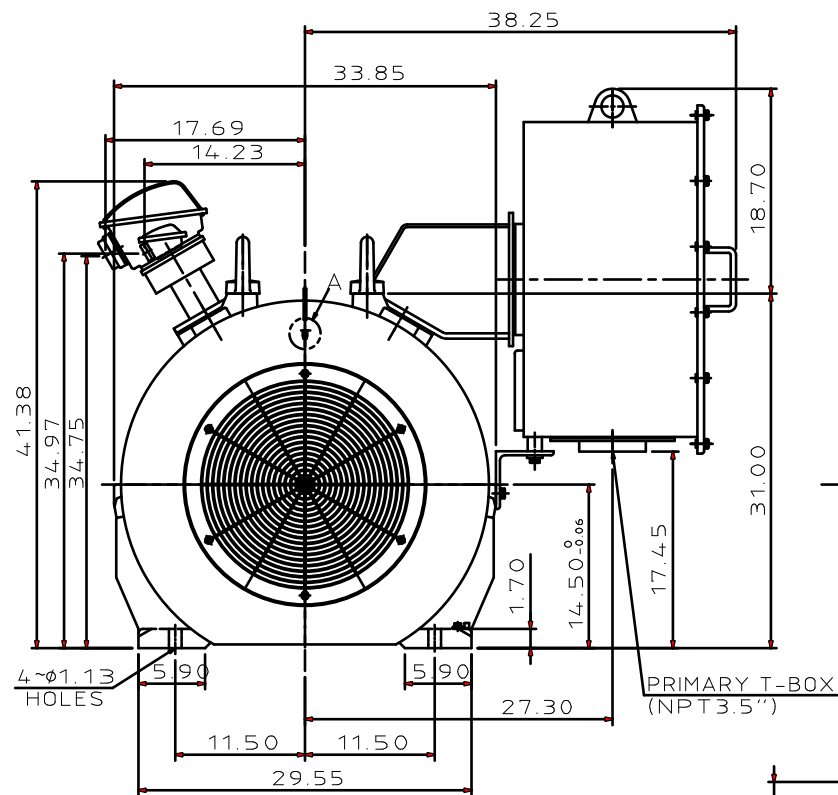

NOTE:

1. DIMENSIONS IN inch
2. FRAME NO. 5810B
3. F CLASS INSULATION, S.F. 1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE-END 6326C3
OPP. DRIVE-END 6322C3
7. WITH WINDING RTD: PT 100Ω/0°C 6PCS
8. WITH SPACE HEATER: 10 120V
9. PROVISION FOR BEARING RTD MOUNTING:
2~PT 1/2" TAPS PER BRACKET
10. CLASS I, DIV. 2, GROUP B,C&D, T3
CLASS I, DIV. 2, GROUP F&G



SHAFT END
(ENLARGED VIEW)

11. NON-SPARKING FAN
12. CORROSION PROOF
13. NOISE: BELOW 85dBA(TOLERANCE 3dBA)
AT 1 METER DISTANCE NO LOAD
14. APPROX. WEIGHT: 7695 lb

DATE DEC 08 2016		OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR	
KF6008		DWG NO. REV:00 4B040L947	
DWN. J.HSIAO	SEP 16 2015	TEC Westinghouse	
CHKD. C.SHIH	SEP 17 2015		
APPD. C.LIU	SEP 17 2015		

6 5 4 3 2 1