
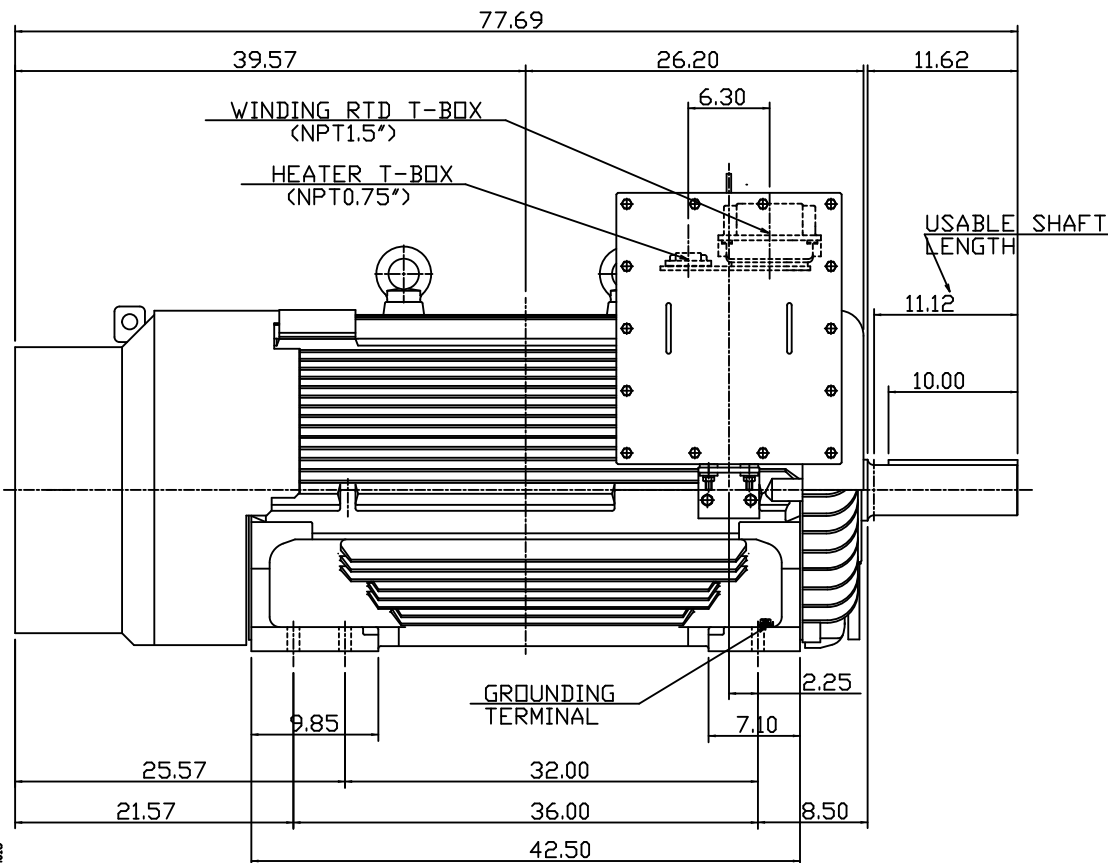



TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AEHGTK	450	336	4	CONT.	2300/4160	60	1800

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

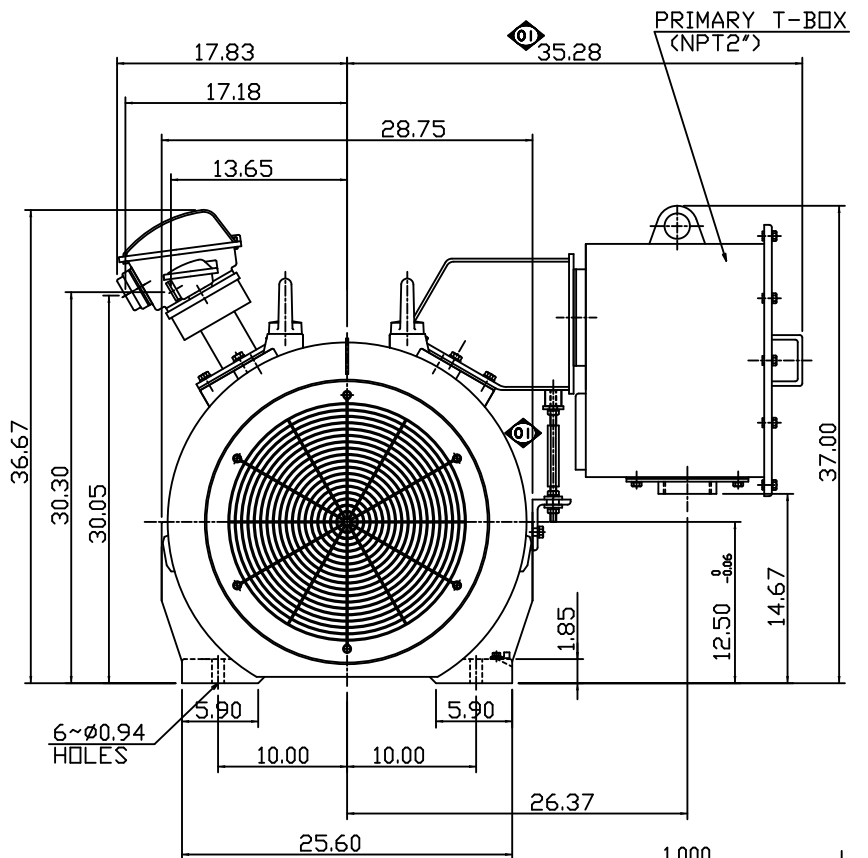

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 5011B(5010B)
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP54
6. WITH SPACE HEATER & WINDING RTD
7. BEARING SIZE: DRIVE-END 6324
OPP. DRIVE-END 6320
8. MOTOR APPROX. WEIGHT: 4800LBS



DATE OCT. 31, 2014		OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR
CATALOG # KG4504		
TEC   Westinghouse		DWG NO. REV: 01 4A040G946