

6

5

4

3

2

1


1/4"-28UNF TAP, DEPTH 0.50

DETAIL A

PROVISION FOR VIBRATION DETECTORS

TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AFHP	300	224	2	CONT.	2300/4000	60	3600

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

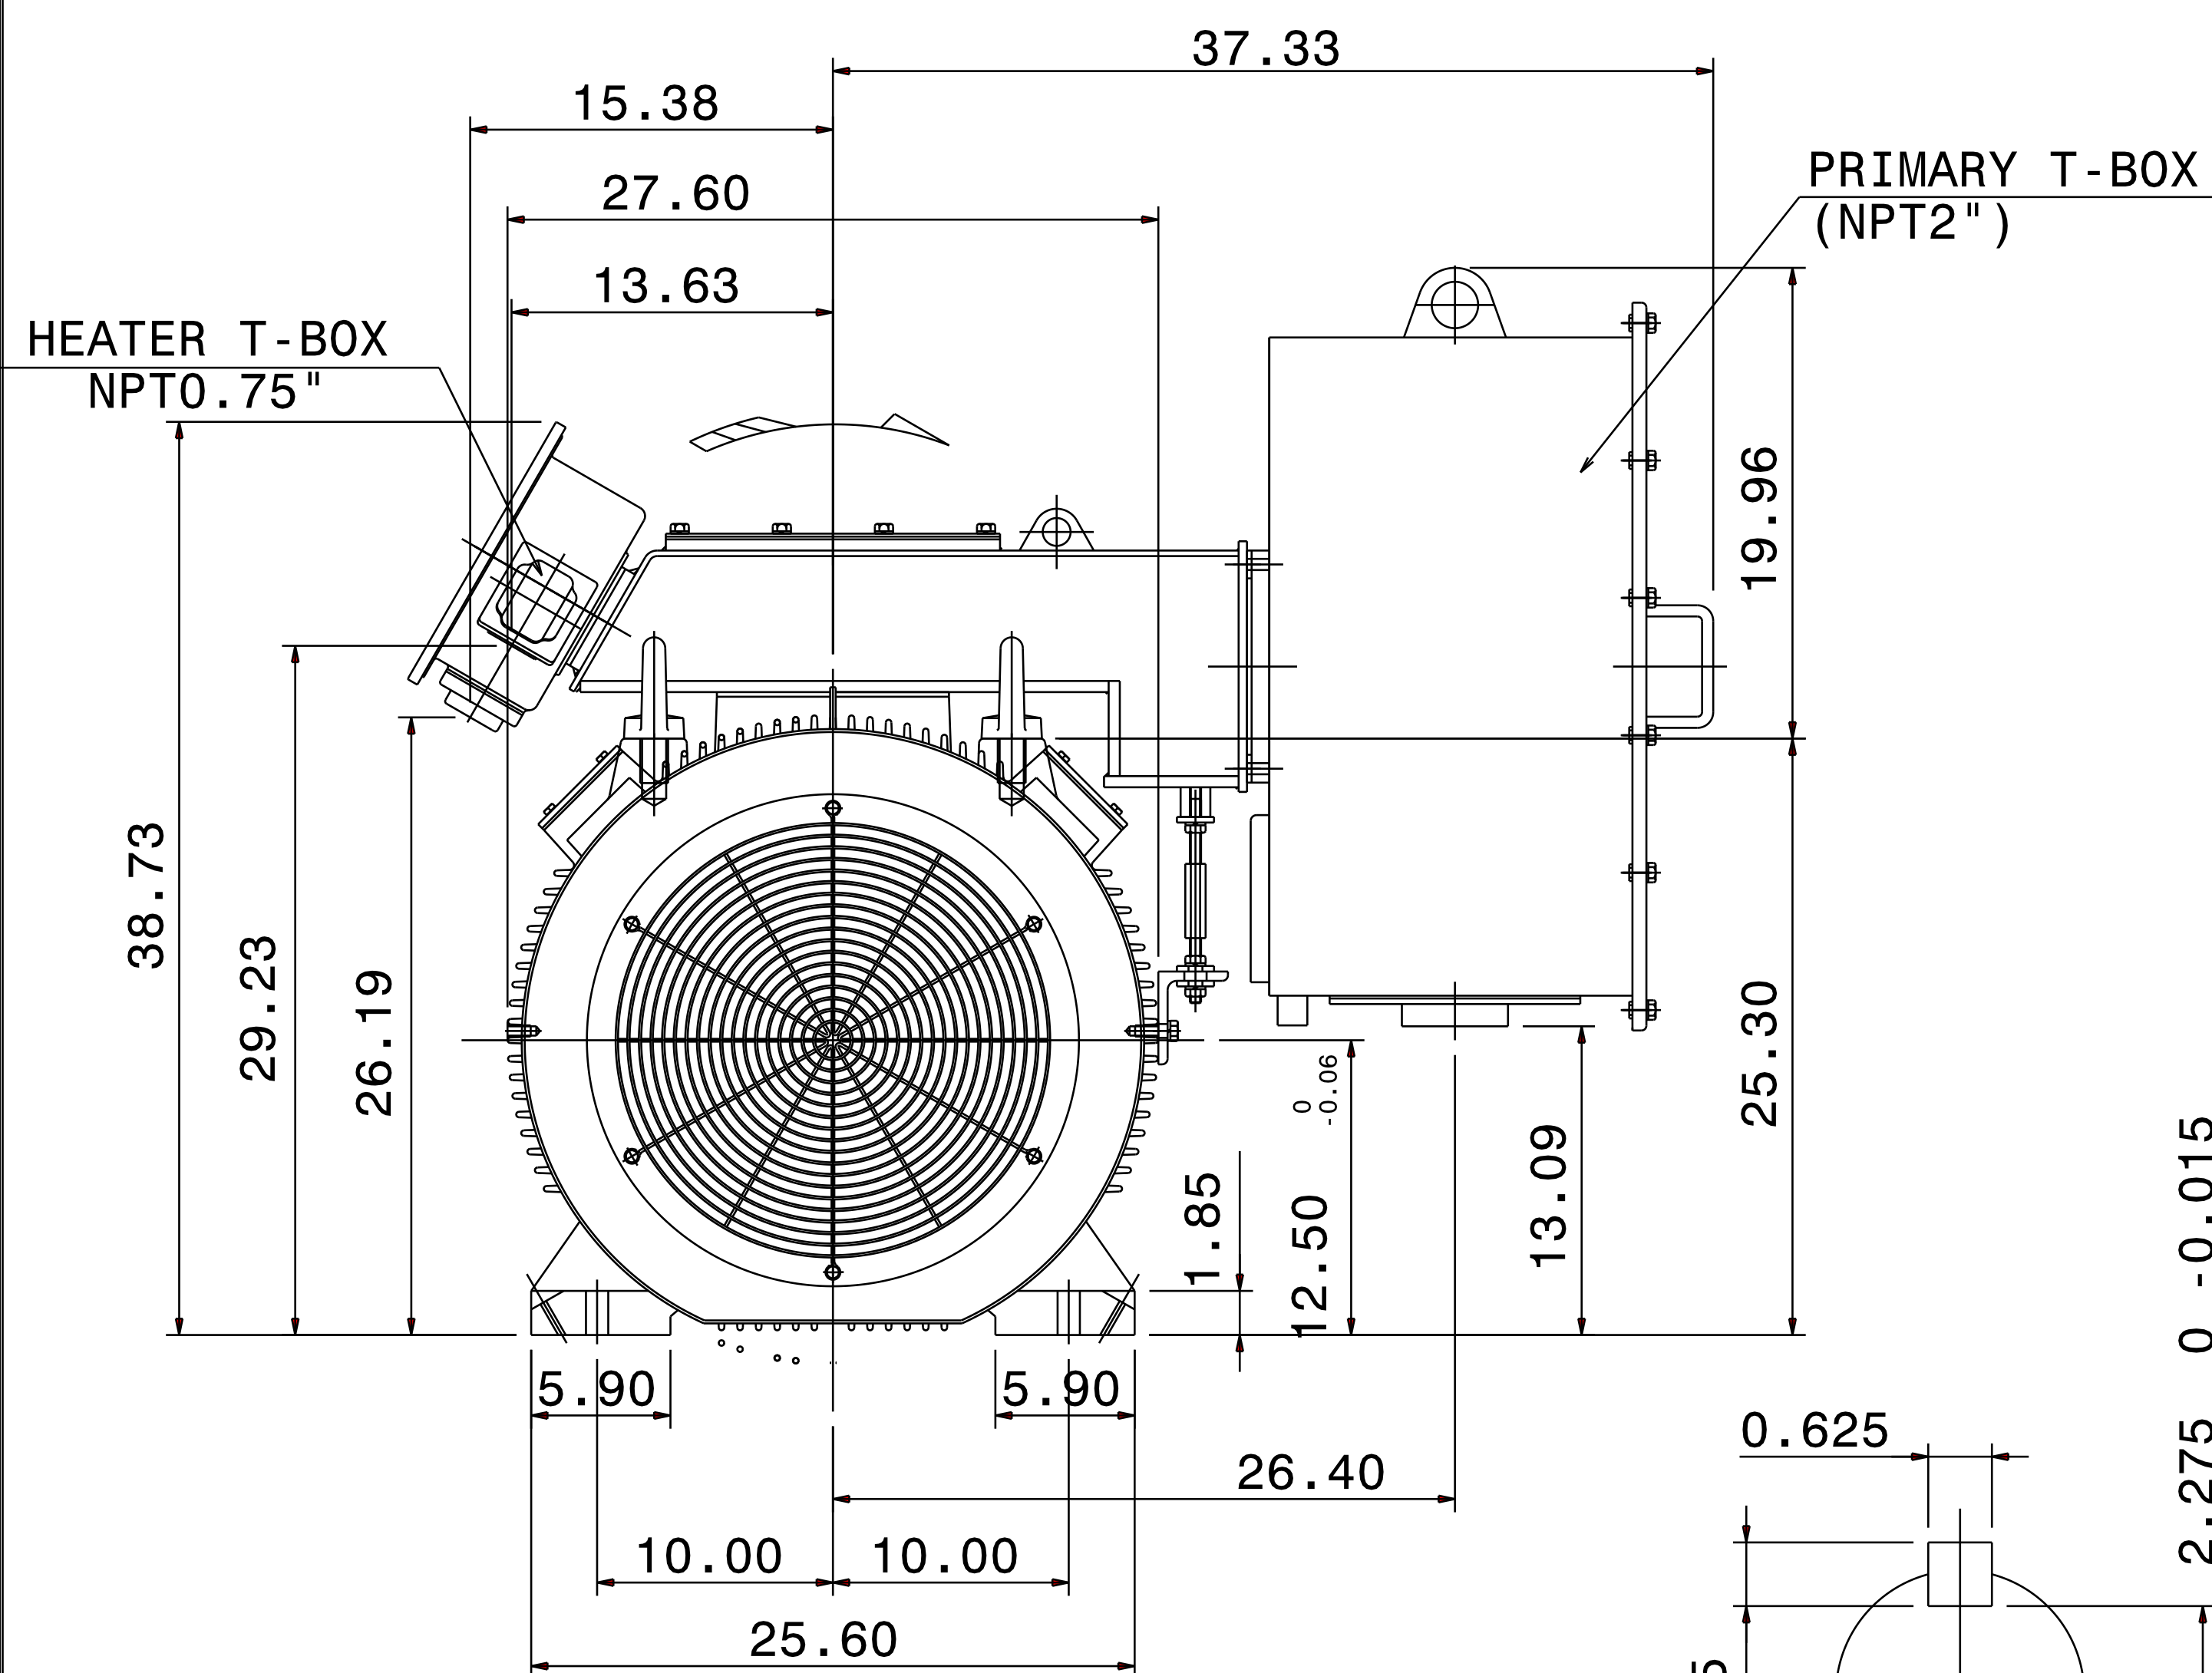
WINDING RTD T-BOX
(NPT1.5")

Ø2.625 0 -0.001

SHAFT END
(ENLARGED VIEW)

NOTE:

1. DIMENSIONS IN inch
 2. FRAME NO. 5009A
 3. F CLASS INSULATION
 4. FOR DIRECT FLEXIBLE COUPLING
 5. ENCLOSURE: IP55
 6. BEARING SIZE: DRIVE-END 6315C3
OPP. DRIVE-END 6315C3
 7. WITH SAPCE HEATER & WINDING RTD
 8. MOTOR APPROX. WEIGHT: 3660 lb
- Ⓑ FOR BEARING RTD, END BRACKETS SHALL BE PRE-DRILLED AND PLUGGED.
- Ⓒ FOR AUXILIARY, FRAME SHALL BE PRE-DRILLED AND COVERD WITH STEEL PLATE.

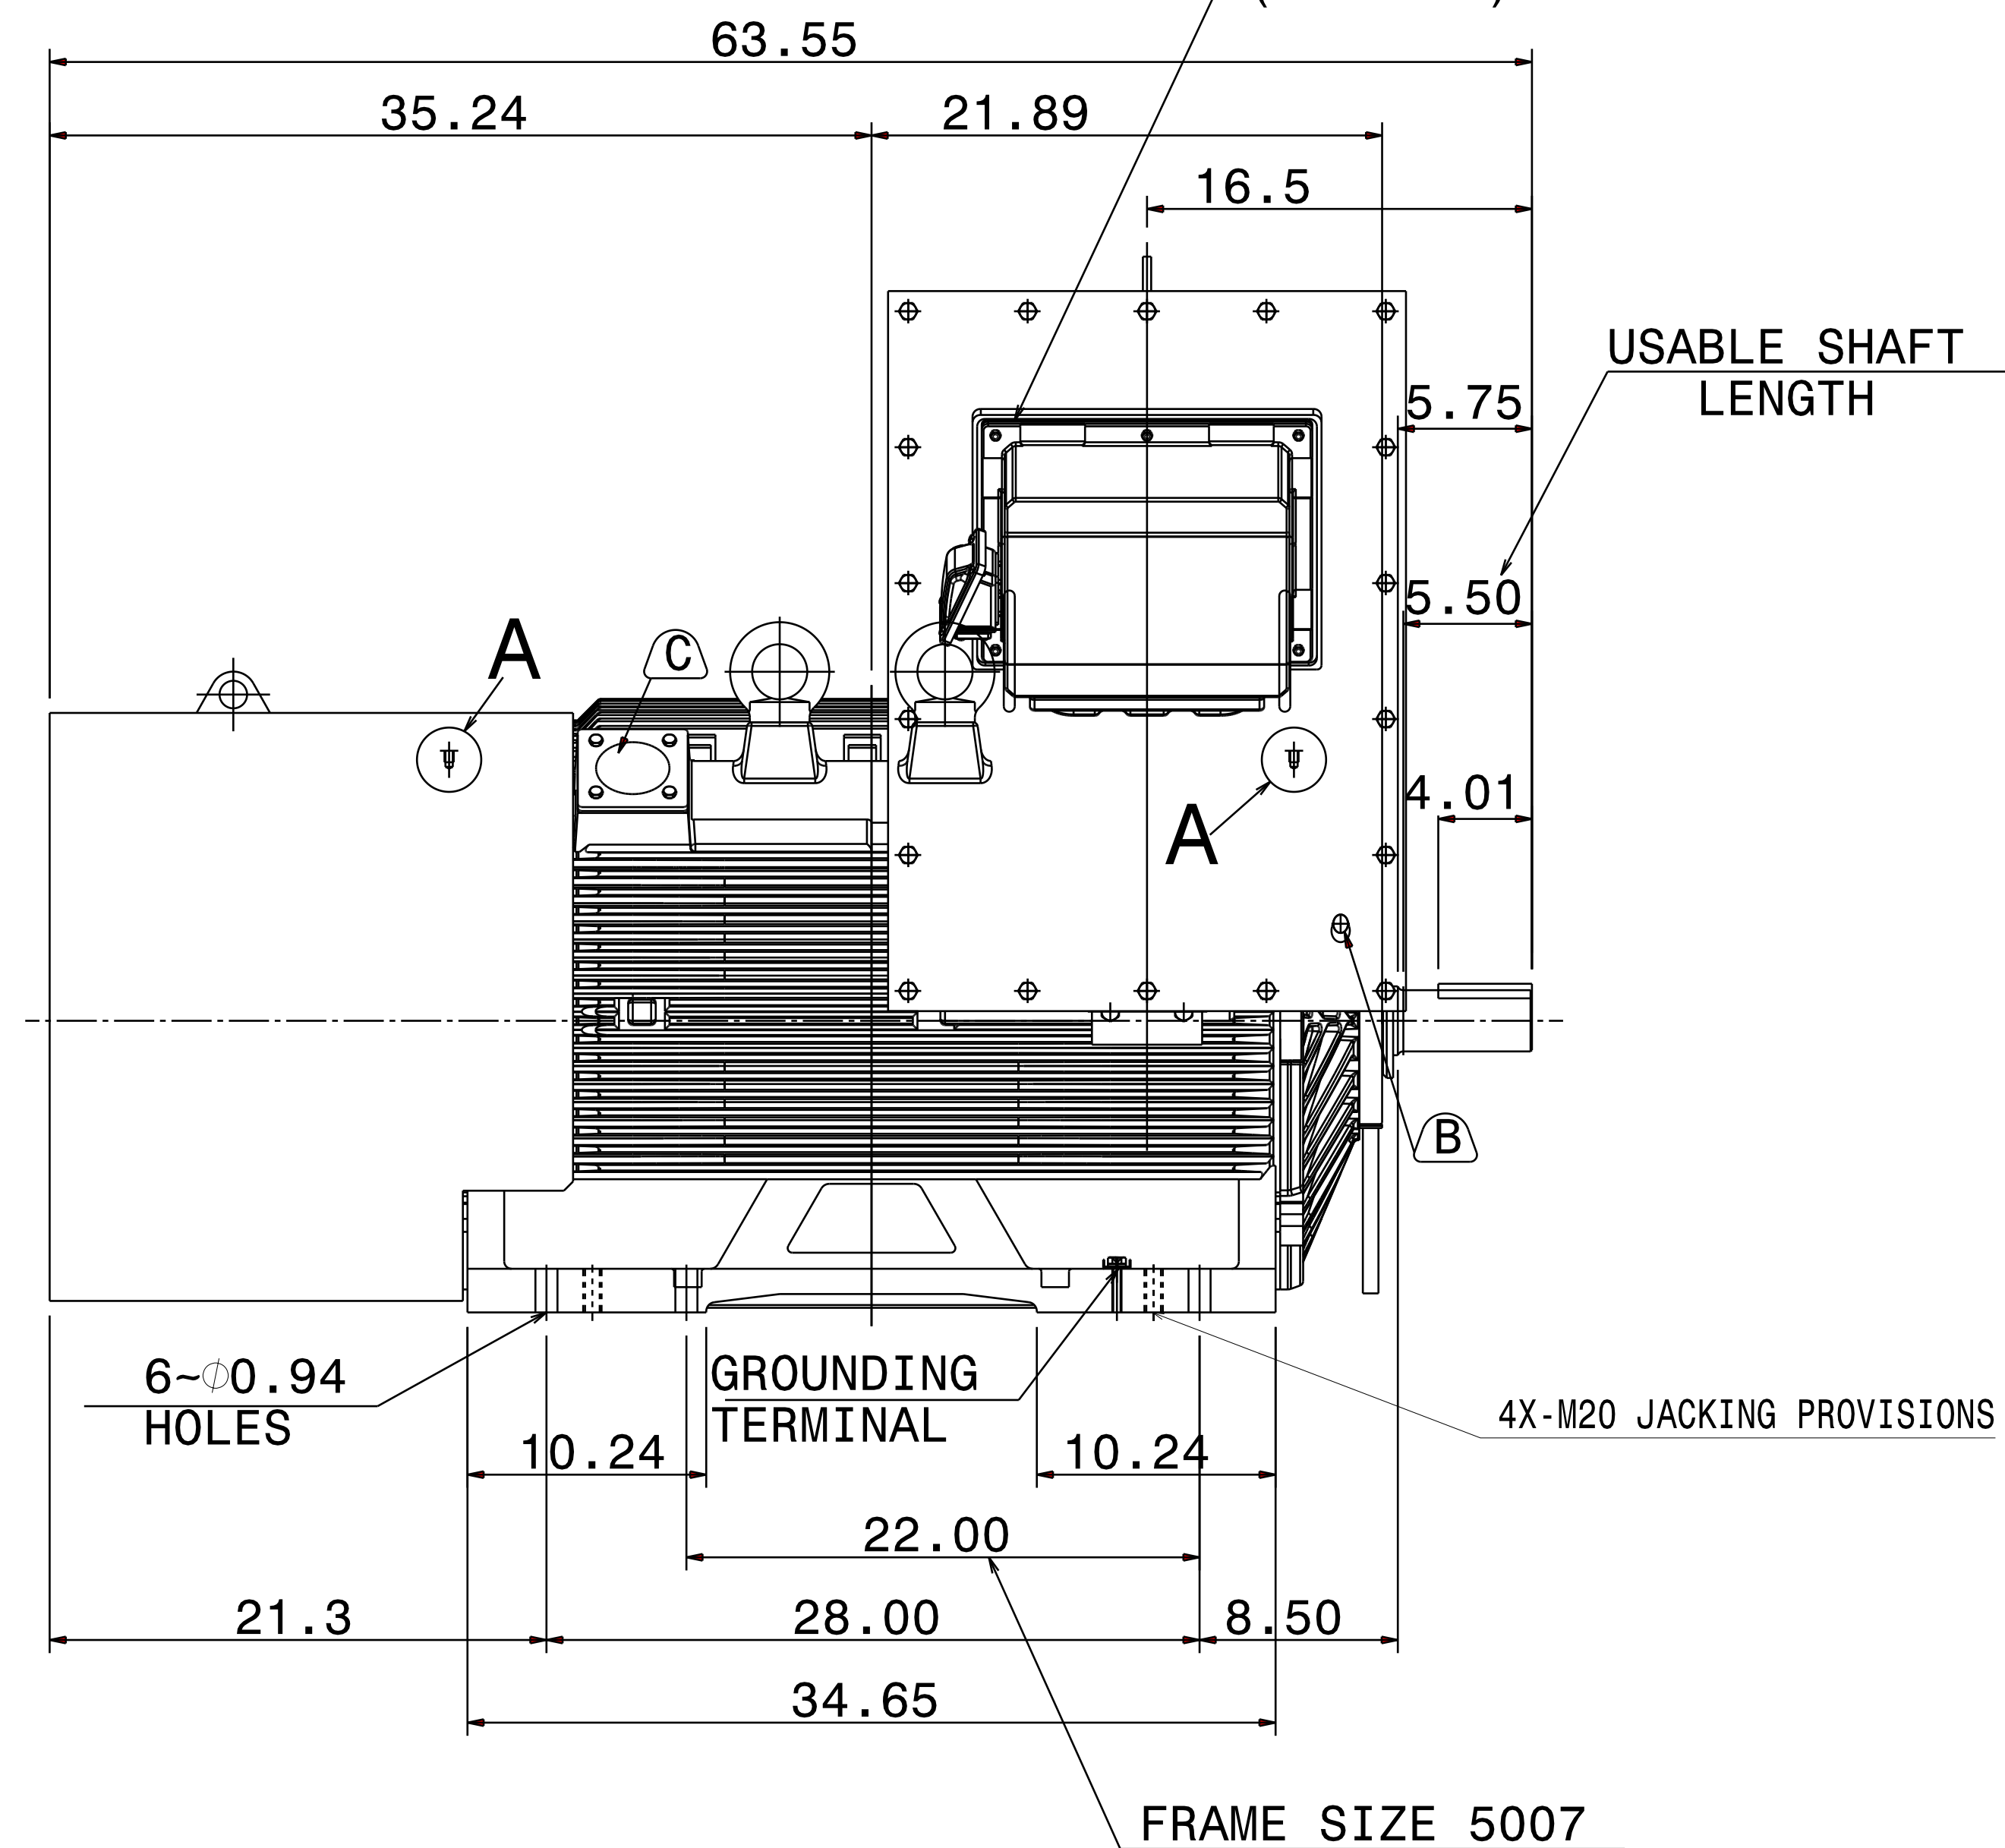

FRAME SIZE 5007

DATE

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

DWN.	L.JHENG	APR.29 2019
CHKD.	H.WANG	APR.30 2019
APPD.	C.WANG	APR.30 2019

TEC Westinghouse

DWG NO. REV: 02

5A040C206

1/4

6

5

4

3

2

1