

6

5

4

3

2

1




TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP.	kW.					
AFHP	400	298	8	CONT.	2300/4000	60	900

PROVISION FOR VIBRATION DETECTORS

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

WINDING RTD T-BOX (NPT1.5")

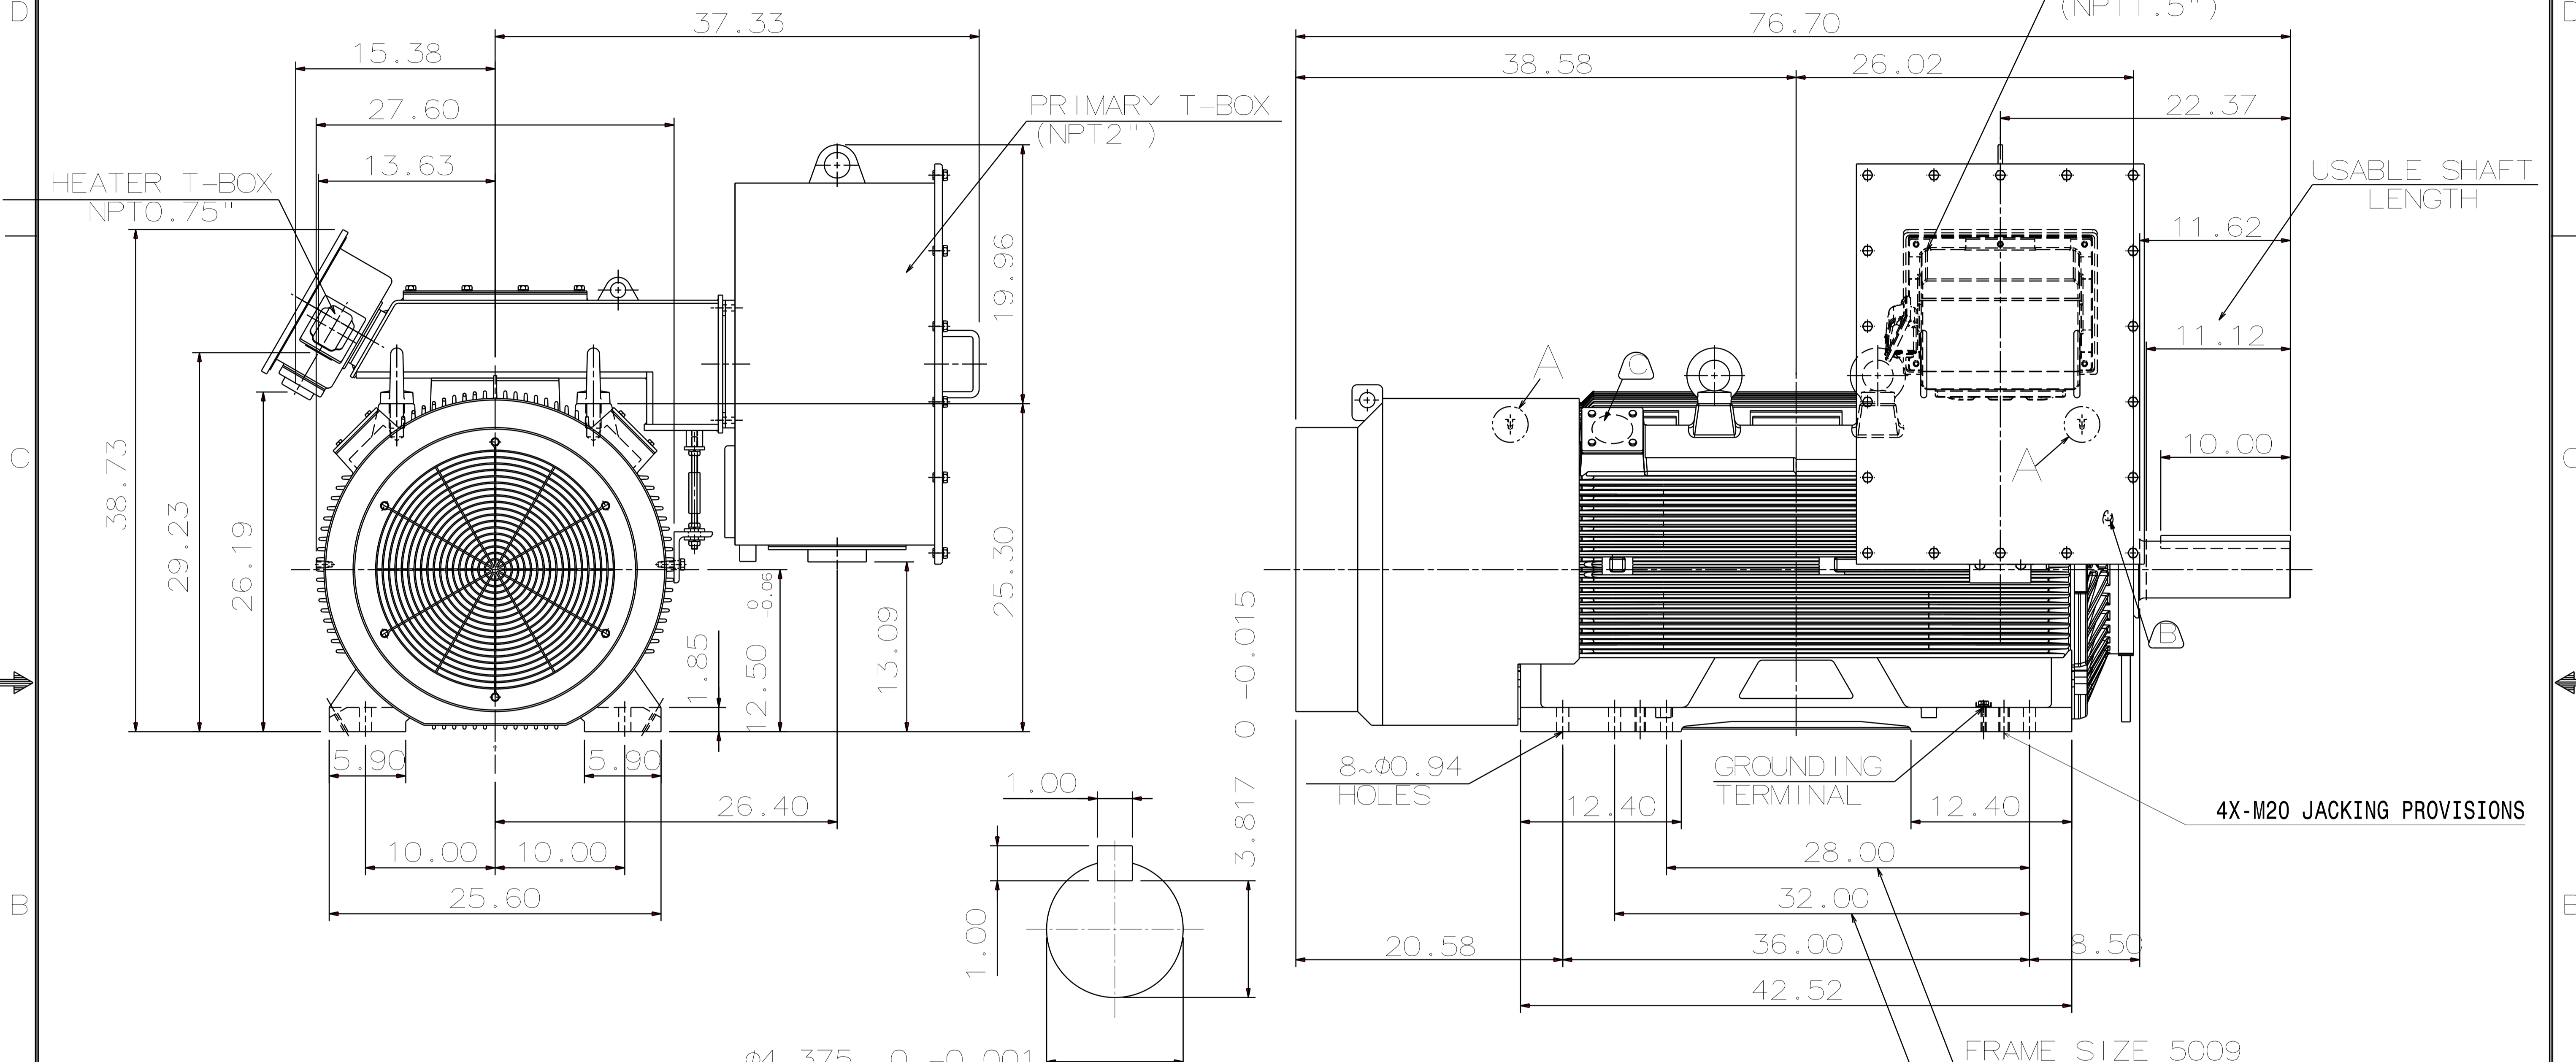

- NOTE:
1. DIMENSIONS IN inch
  2. FRAME NO. 5011C
  3. F CLASS INSULATION
  4. FOR DIRECT FLEXIBLE COUPLING
  5. ENCLOSURE: IP55
  6. BEARING SIZE: DRIVE-END NU324C3  
OPP. DRIVE-END 6320C3
  7. WITH SPACE HEATER & WINDING RTD
  8. MOTOR APPROX. WEIGHT: 5190 lb

- ⓑ FOR BEARING RTD, END BRACKETS SHALL BE PRE-DRILLED AND PLUGGED.
- Ⓒ FOR AUXILIARY, FRAME SHALL BE PRE-DRILLED AND COVERD WITH STEEL PLATE.

DATE 070722	OUTLINE DIMENSIONS	
KPF4008R	3-PHASE INDUCTION MOTOR	
DWN. L. JHENG APR. 29. 2019	DWG NO.	REV: 01
CHKD. H. WANG APR. 30. 2019	5A040C219	
APPD. C. WANG APR. 30. 2019	TEC Westinghouse	

6

5

4

3

2

1