

6

5

4

3

2

1

1/4"-28UNF TAP,
DEPTH 0.50

TYPE

TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP.	kW.					
AFHP	800	597	4	CONT.	2300/4000	60	1800


DETAIL A

PROVISION FOR VIBRATION DETECTORS

TOTALLY ENCLOSED FAN-COOLED, TYPE. SQUIRREL-CAGE ROTOR

WINDING RTD T-BOX
(NPT1.5")

PRIMARY T-BOX
(NPT3.5")

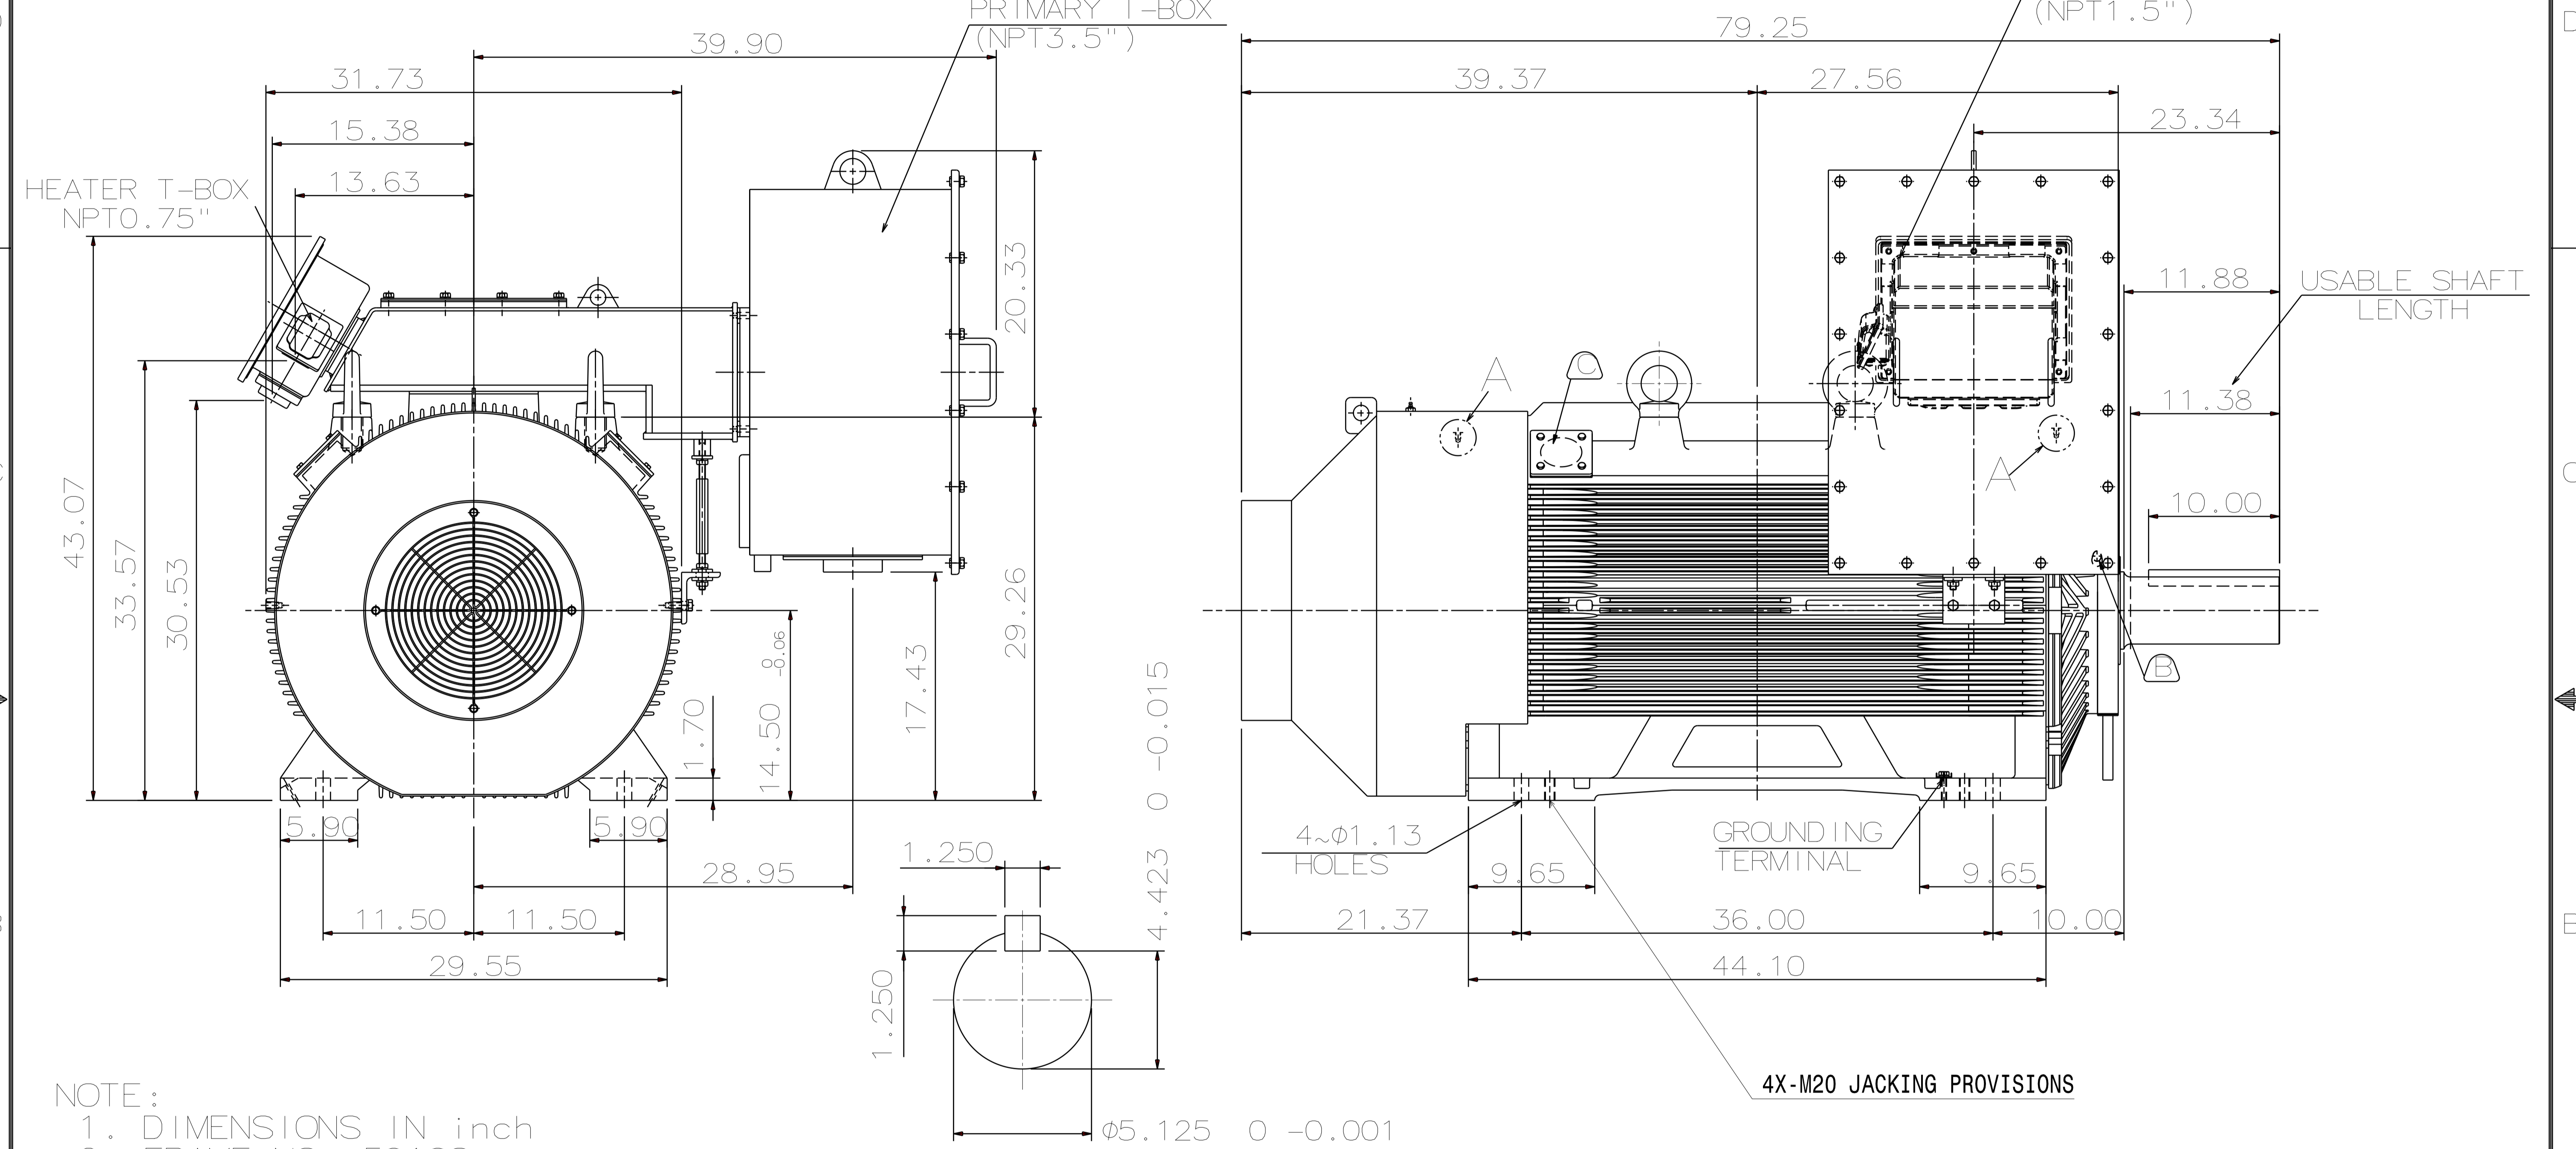

NOTE:

1. DIMENSIONS IN inch
2. FRAME NO. 5810C
3. F CLASS INSULATION
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP55
6. BEARING SIZE:

DRIVE-END NU330C3
OPP. DRIVE-END 6322C3

7. WITH SPACE HEATER & WINDING RTD
8. MOTOR APPROX. WEIGHT: 7100 lb

- ⓑ FOR BEARING RTD, END BRACKETS SHALL BE PRE-DRILLED AND PLUGGED.
- Ⓒ FOR AUXILIARY, FRAME SHALL BE PRE-DRILLED AND COVERD WITH STEEL PLATE.

DATE
071122

OUTLINE DIMENSIONS

KPF8004R

3-PHASE INDUCTION MOTOR

DWN.	L. JHENG	APR 22 2019
CHKD.	H. WANG	APR 23 2019
APPD.	C. WANG	APR 23 2019

TEC Westinghouse

DWG NO. REV:01

5A040C247

6

5

4

3

2

1