


1/4"-28UNF TAP,
DEPTH 0.50

DETAIL A

PROVISION FOR VIBRATION DETECTORS

TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP.	kW.					
AFHP	800	597	6	CONT.	2300/4000	60	1200

TOTALLY ENCLOSED FAN-COOLED, TYPE. SQUIRREL-CAGE ROTOR
81.74

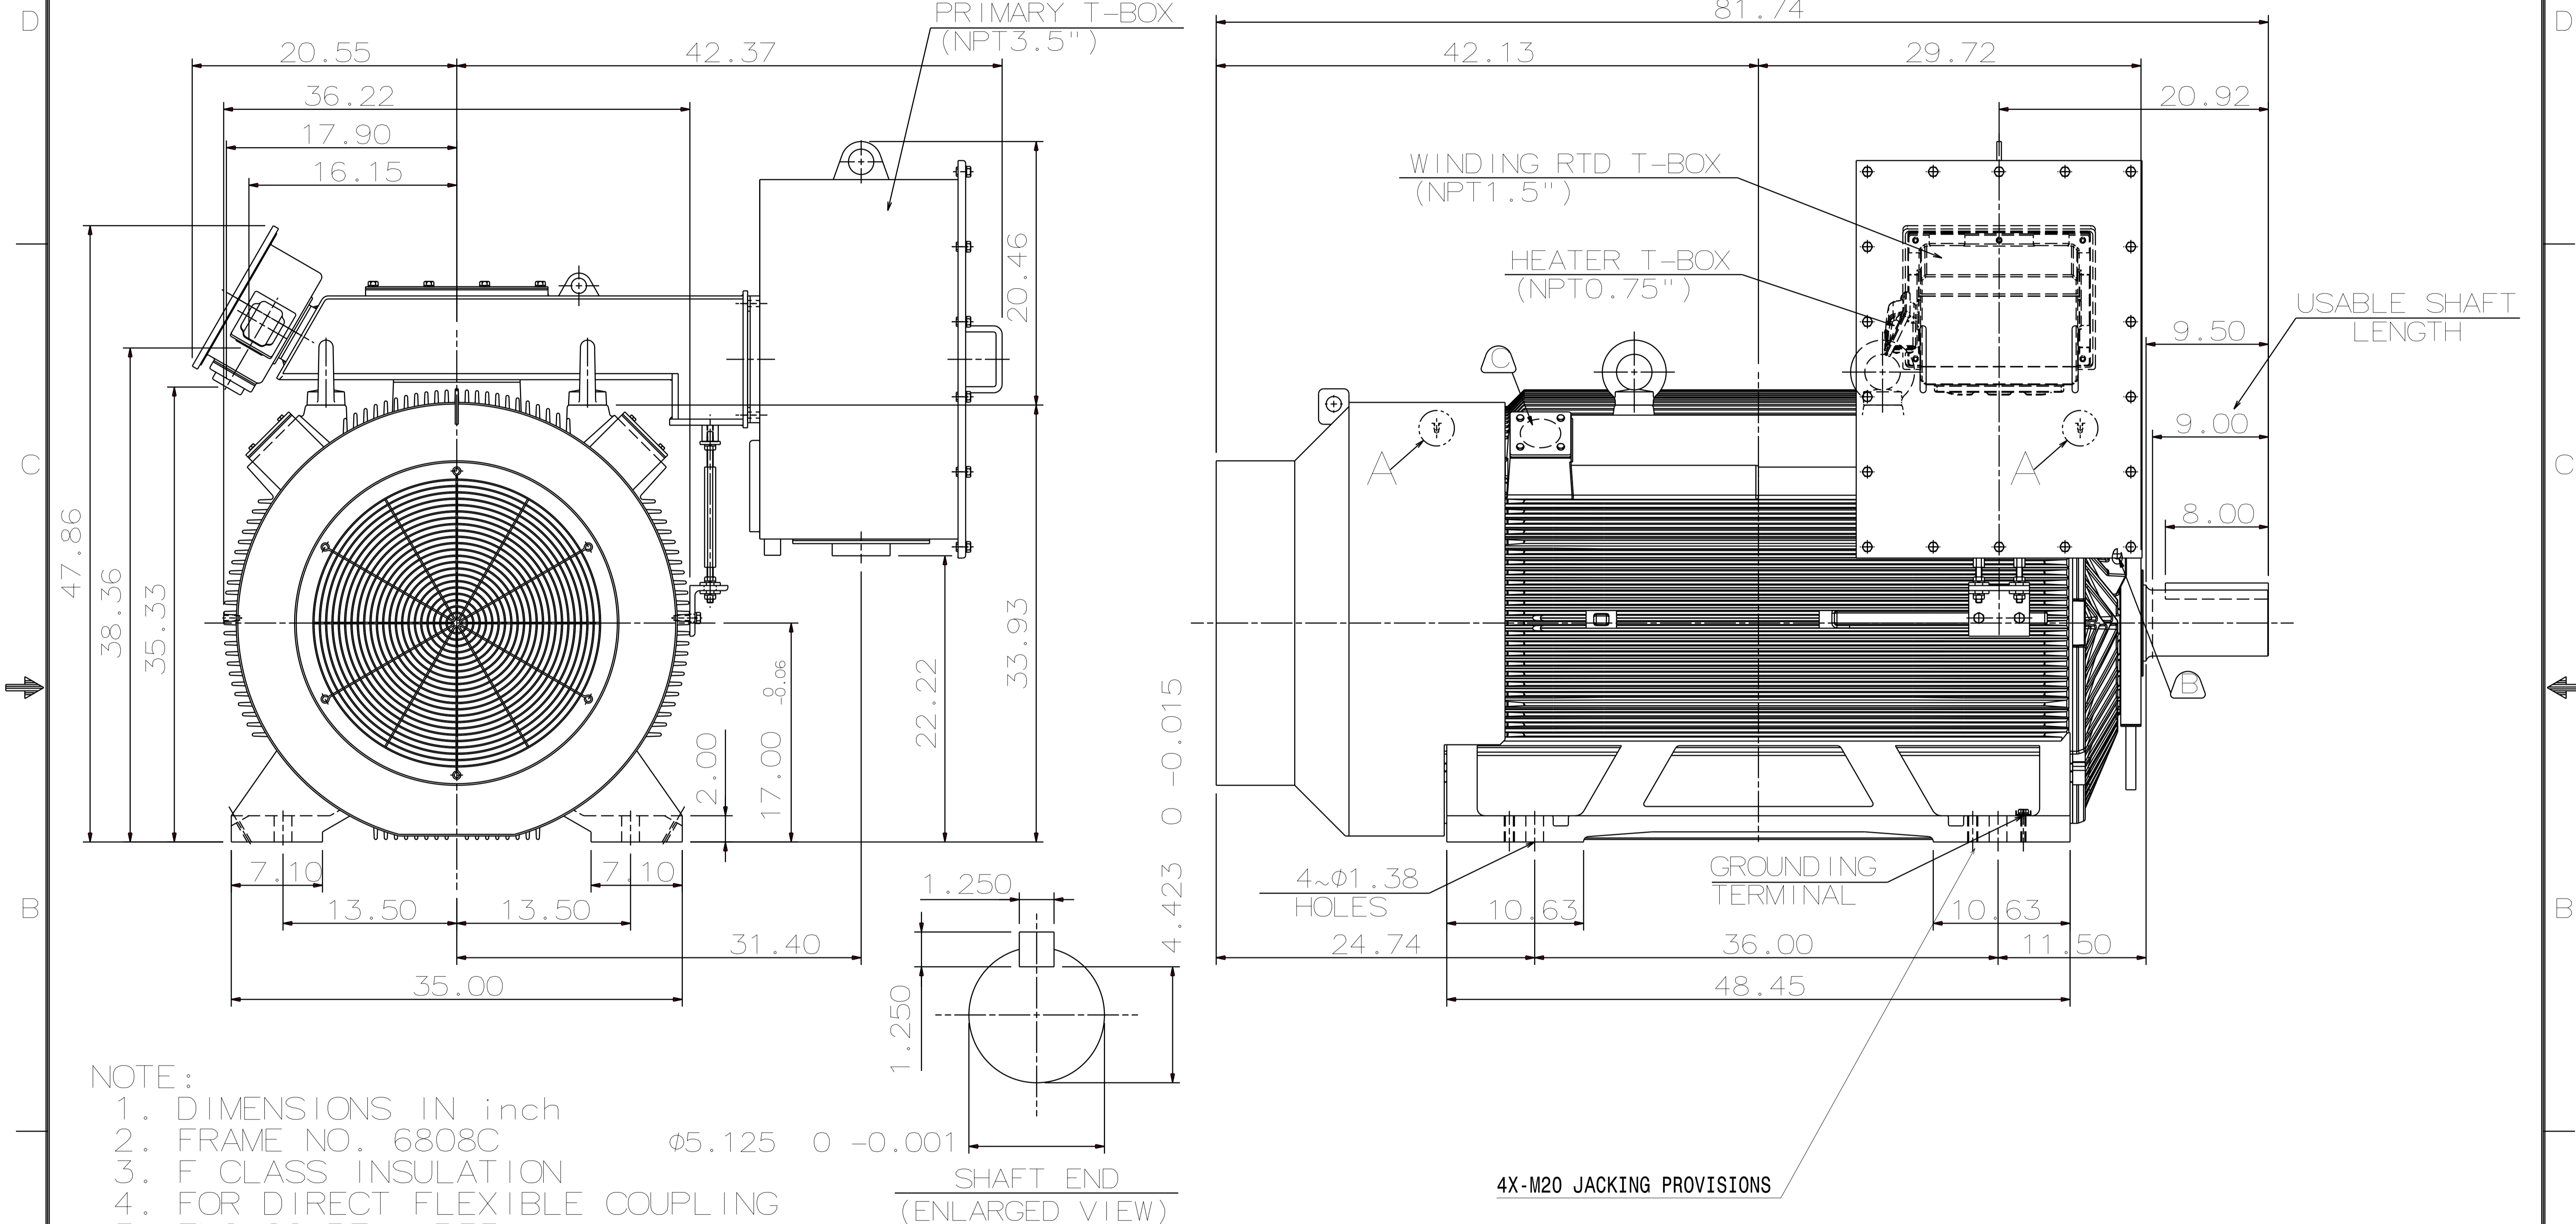

NOTE:

- DIMENSIONS IN inch
 - FRAME NO. 6808C
 - F CLASS INSULATION
 - FOR DIRECT FLEXIBLE COUPLING
 - ENCLOSURE: IP55
 - BEARING SIZE: DRIVE-END NU330C3
OPP. DRIVE-END 6322C3
 - WITH SPACE HEATER & WINDING RTD
 - MOTOR APPROX. WEIGHT: 9200 lb
- ⓑ FOR BEARING RTD, END BRACKETS SHALL BE PRE-DRILLED AND PLUGGED.
- Ⓒ FOR AUXILIARY, FRAME SHALL BE PRE-DRILLED AND COVERD WITH STEEL PLATE.

DATE	071122	OUTLINE DIMENSIONS	
	KPF8006R	3-PHASE INDUCTION MOTOR	
DWG NO.	5A040C474	REV:02	

DWN.	C. CHANG	JUN. 28. 2019
CHKD.	H. WANG	JUN. 28. 2019
APPD.	C. WANG	JUN. 28. 2019

TEC Westinghouse