

6

5

4

3

2



1

1/4"-28UNF TAP,
DEPTH 0.50
DETAIL A

PROVISION FOR VIBRATION DETECTORS

TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AFHP	900	671	2	CONT.	2300/4000	60	3600

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

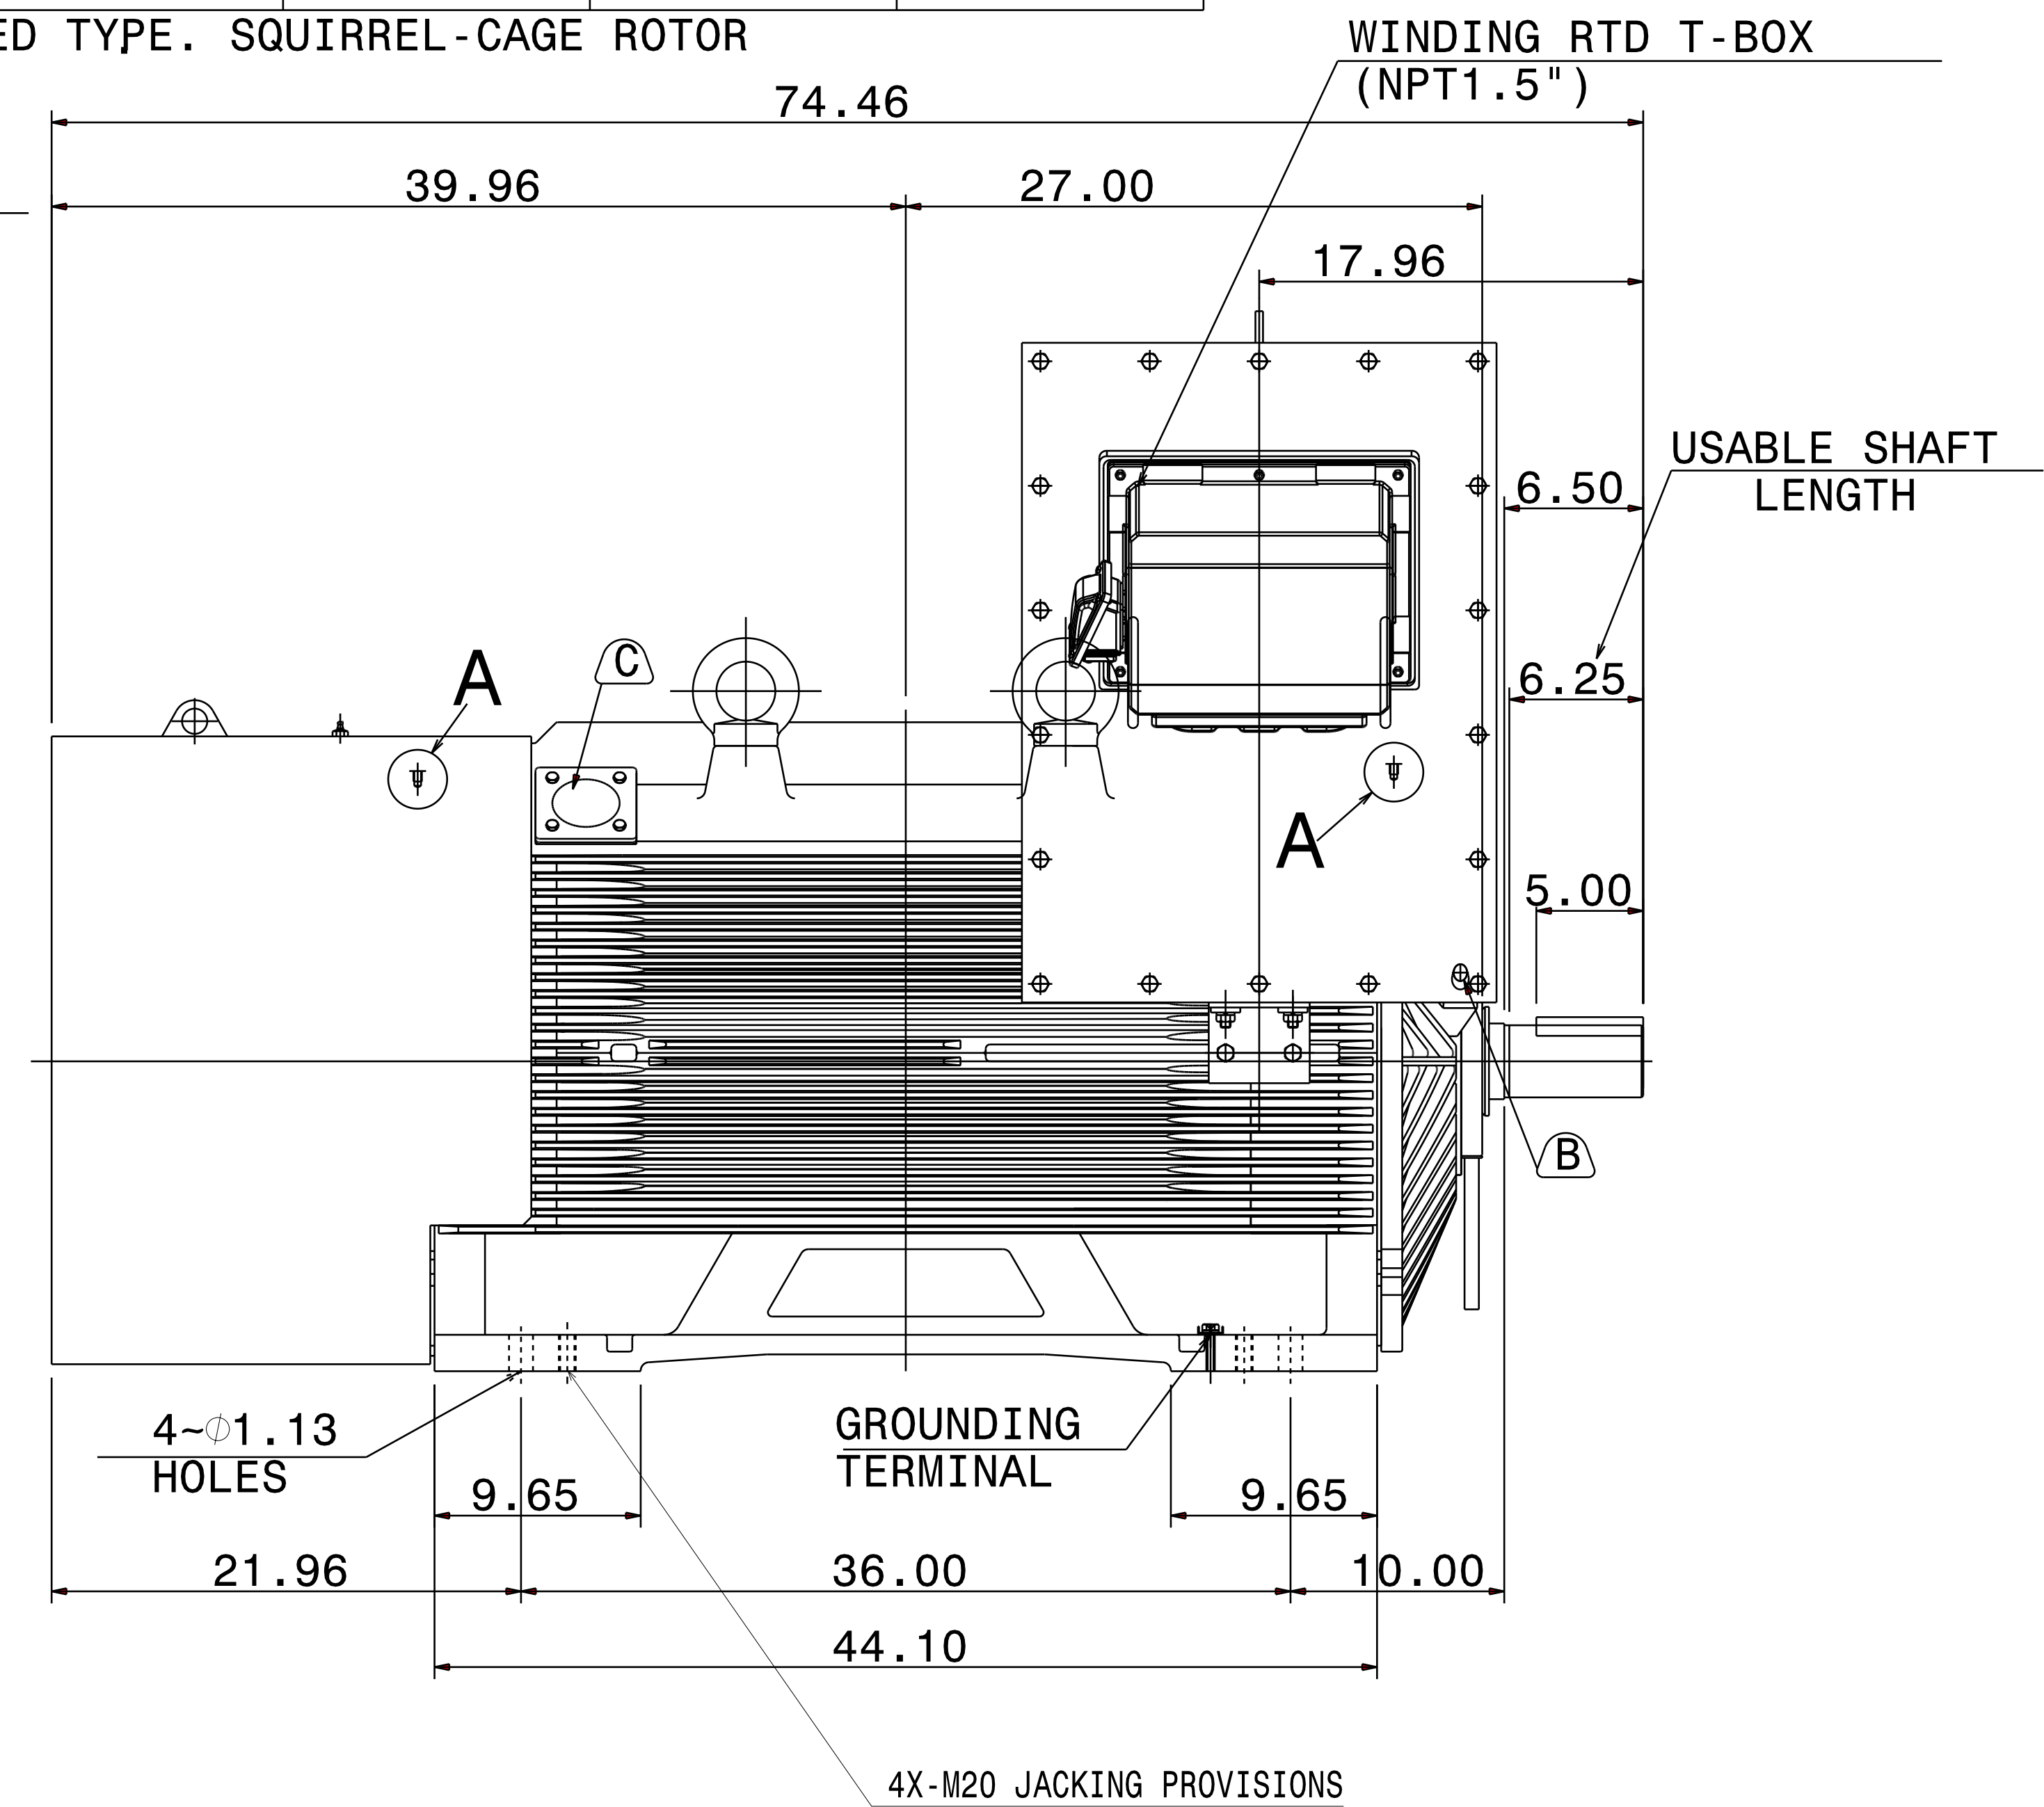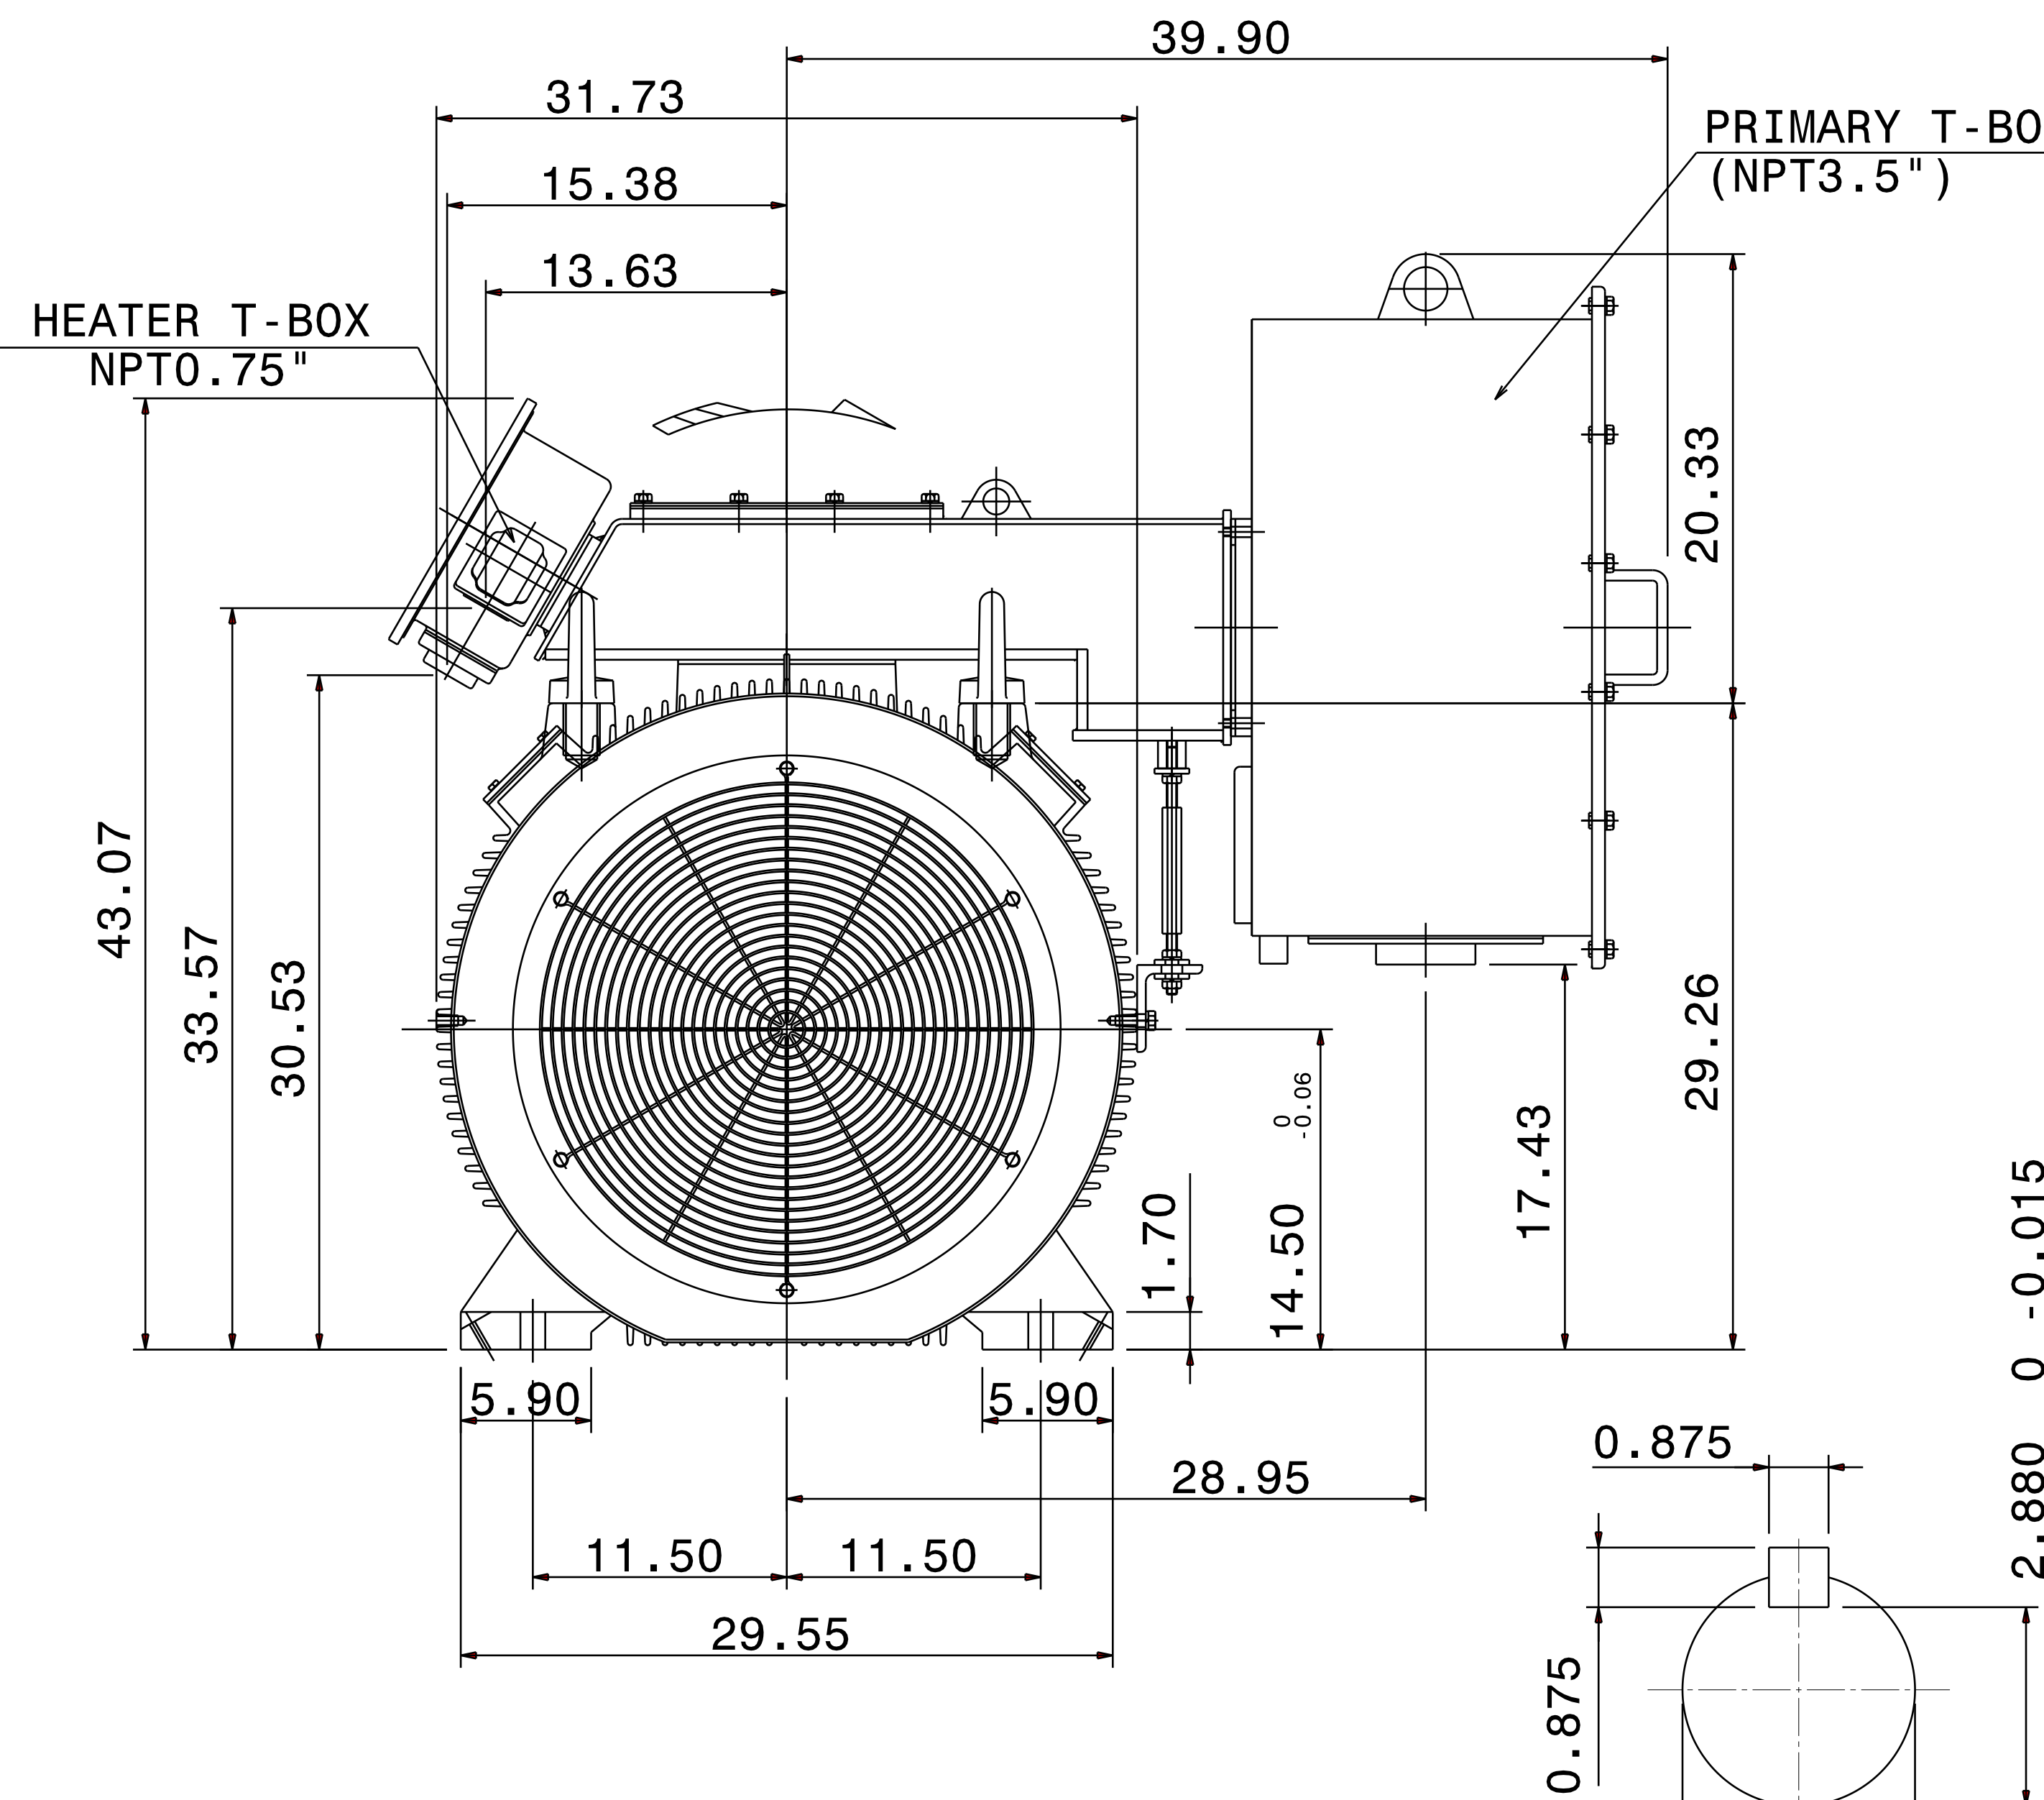

NOTE:

1. DIMENSIONS IN inch
 2. FRAME NO. 5810A
 3. F CLASS INSULATION
 4. FOR DIRECT FLEXIBLE COUPLING
 5. ENCLOSURE: IP55
 6. BEARING SIZE: DRIVE-END 6218C3
OPP. DRIVE-END 6315/C3VL0241
 7. WITH SAPCE HEATER & WINDING RTD
 8. MOTOR APPROX. WEIGHT: 6500 lb
- Ⓑ FOR BEARING RTD, END BRACKETS SHALL BE PRE-DRILLED AND PLUGGED.
- Ⓒ FOR AUXILIARY, FRAME SHALL BE PRE-DRILLED AND COVERD WITH STEEL PLATE.

DATE			OUTLINE DIMENSIONS	
KPF9002			3-PHASE INDUCTION MOTOR	
DWN.	L.JHENG	APR.22 2019	DWG NO.	REV: 02
CHKD.	H.WANG	APR.23 2019	5A040C243	
APPD.	C.WANG	APR.23 2019		

TEC Westinghouse