


|                       |                                               |                           |
|-----------------------|-----------------------------------------------|---------------------------|
| DATE<br>JAN. 15, 2015 | OUTLINE DIMENSIONS<br>3-PHASE INDUCTION MOTOR | MOTOR TYPE:<br>AEHH8P-SGR |
| CAT. #: NP0404G       |                                               | FRAME NO. 324T            |

| Pole | HP     | kW           | Hz            | VOLT     | Syn.Speed<br>r/min(rpm) |
|------|--------|--------------|---------------|----------|-------------------------|
| 4    | 40     | 29.8         | 60            | 230/460  | 1800                    |
| Ins  | Rating | Dimension in | Approx Weight | Bearings |                         |
| F    | CONT.  | inch         | 612 lbs.      | DE: 6312 | NDE: 6212               |

Totally Enclosed Fan-Cooled Type, Squirrel-cage Rotor.

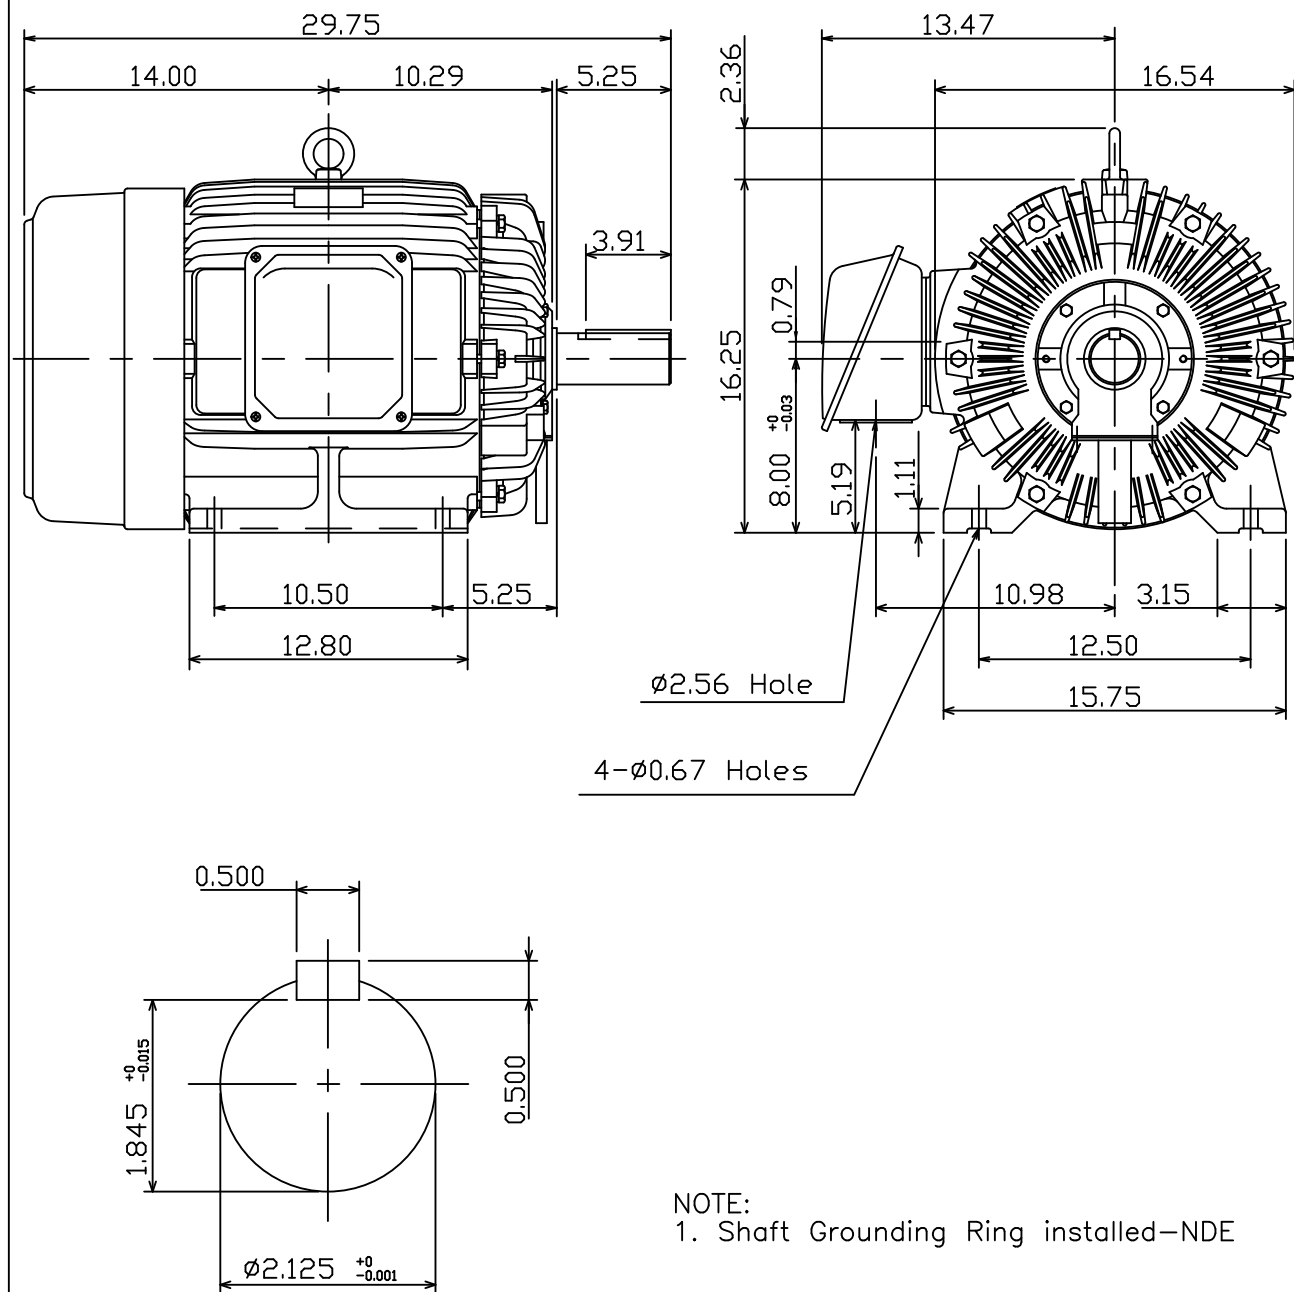

NOTE:  
1. Shaft Grounding Ring installed—NDE

|                 |          |                   |              |
|-----------------|----------|-------------------|--------------|
| 12.06.10        | 郭耿良      |                   |              |
| DWN. J.H.LIANG  | 05-20-99 | TEC® Westinghouse | DWG NO.      |
| CHKD. C.H.KAO   | 06-15-99 |                   | 31049J355272 |
| APPD. Y.B.HUANG | 06-15-99 |                   |              |