

11

10

9

8

7

6

5


4

3


2

1

POLE	HP	kW	Hz	VOLT	r/min(RPM)	INS	RATING	DIMENSION IN	APPROX WEIGHT	BEARINGS
6	100	75	60	230/460	1200	F	CONT.	INCHES	1510lbs	DE: 6318 NDE: 6316

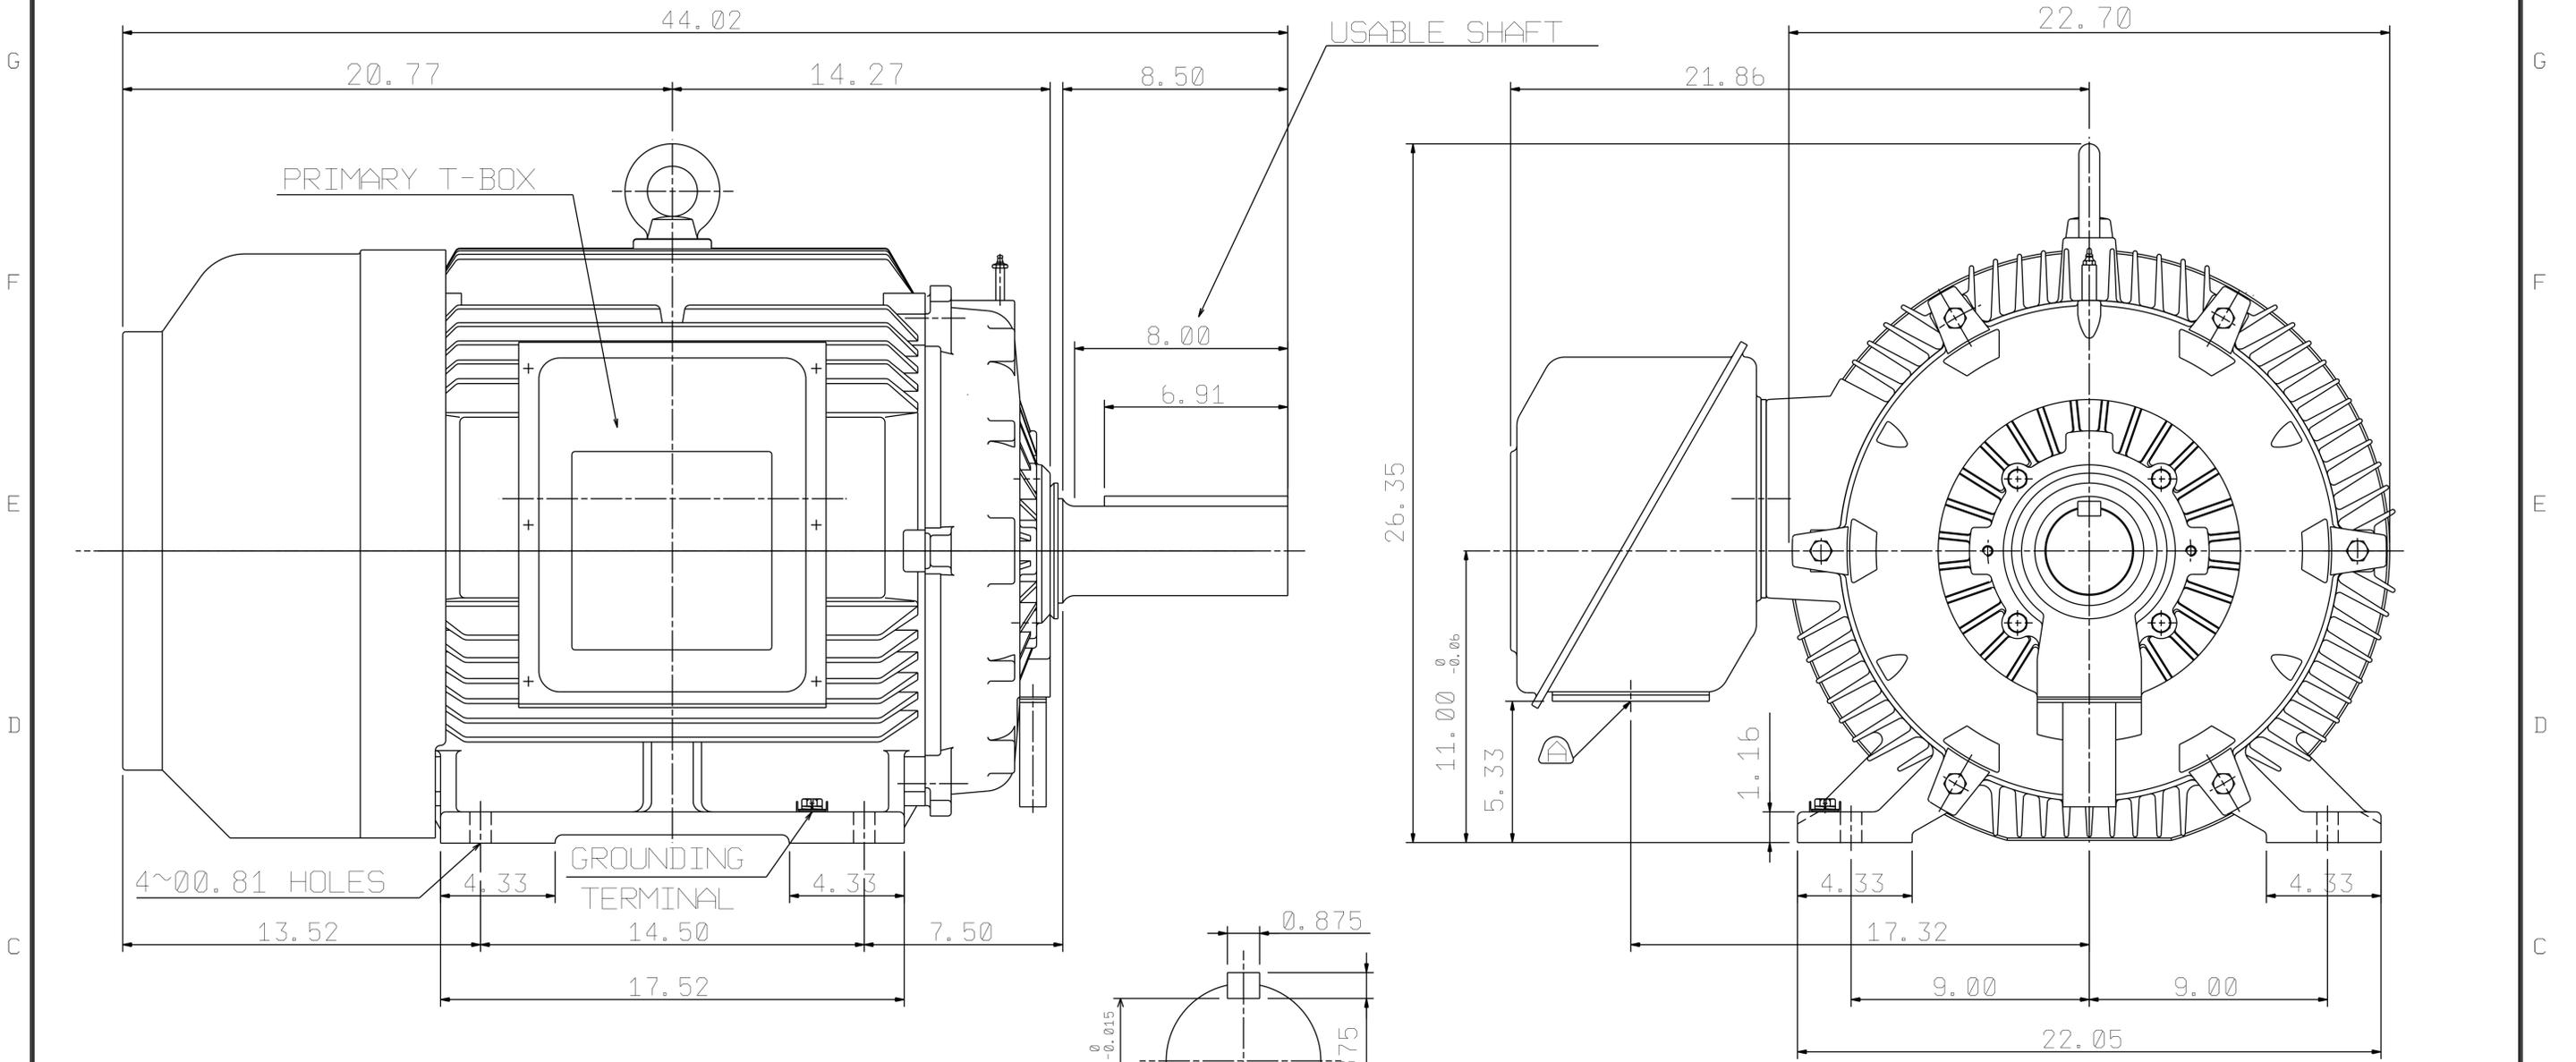

NOTE:
 1. FOR DIRECT FLEXIBLE COUPLING
 2. ENCLOSURE: IP54 PROTECTION



REMOVABLE COVER FOR CABLE ENTRY TO BE DRILLED BY THE CUSTOMER.

OUTLINE DIMENSIONS			
3-PHASE INDUCTION MOTOR			
MOTOR TYPE	AEHH8P	FRAME NO.	444T
CATALOG #	NP1006	DATE	MARCH, 5, 2020
ORDER NO.		TRANS. SHEET	

TEC Westinghouse

DWG NO.
31057C523190

6.13.19	Show approx weight	K. L. KUO
---------	--------------------	-----------

APPD.	BEN. YANG	06.13.19
CHKD.	K. L. KUO	06.13.19
DWG.	K. L. KUO	06.13.19

11 10 9 8 7 6 5 4 3 2 1