


11 10 9 8 7 6 5 4 3 2 1

TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AEHH8P	100	74.6	6	CONT.	230/460	60	1200


TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

8X .625"-11UNC, 1.18

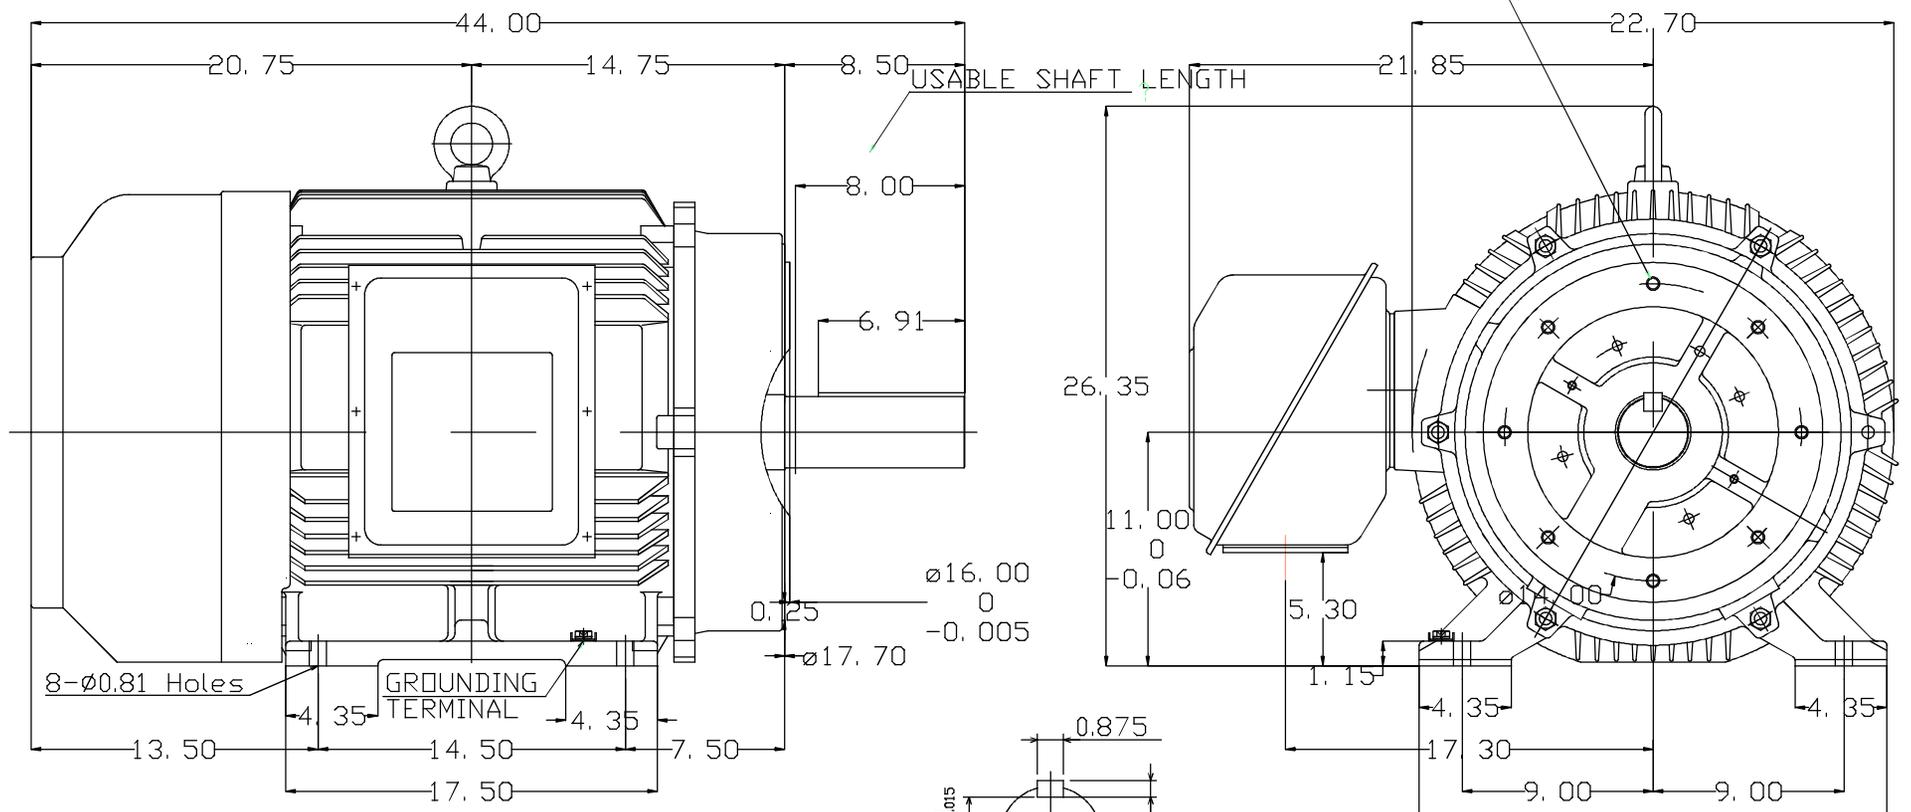

NOTE:

1. DIMENSIONS IN INCHES
2. FRAME SIZE 444TC
3. F CLASS INSULATION, S.F. 1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. BEARING NO.: DRIVE END: 6318C3
OPP. DRIVE END: 6316C3
6. ENCLOSURE: IP44
7. APPROX. WEIGHT: 1580 LBS



DATE	OCTOBER 3, 2014	OUTLINE DIMENSIONS
CATALOG #:	NP1006C	3-PHASE INDUCTION MOTOR
DWN.	S.LEE	JAN•26•2011
CHKD.	S.LEE	JAN•26•2011
APPD.	H.LIU	JAN•26•2011
TEC Westinghouse		DWG NO. REV: 00
		3A049DWB10464X-25

11 10 9 8 7 6 5 4 3 2 1