


POLE	HP	kW	Hz	VOLT	R/MIN (RPM)	INS	RATING	DIMENSION IN	APPROX. WEIGHT	BEARINGS
2	125	93.2	60	230/460	3600	F	CONT.	INCH	1400 lbs.	DE: 6314C3 NDE: 6314C3

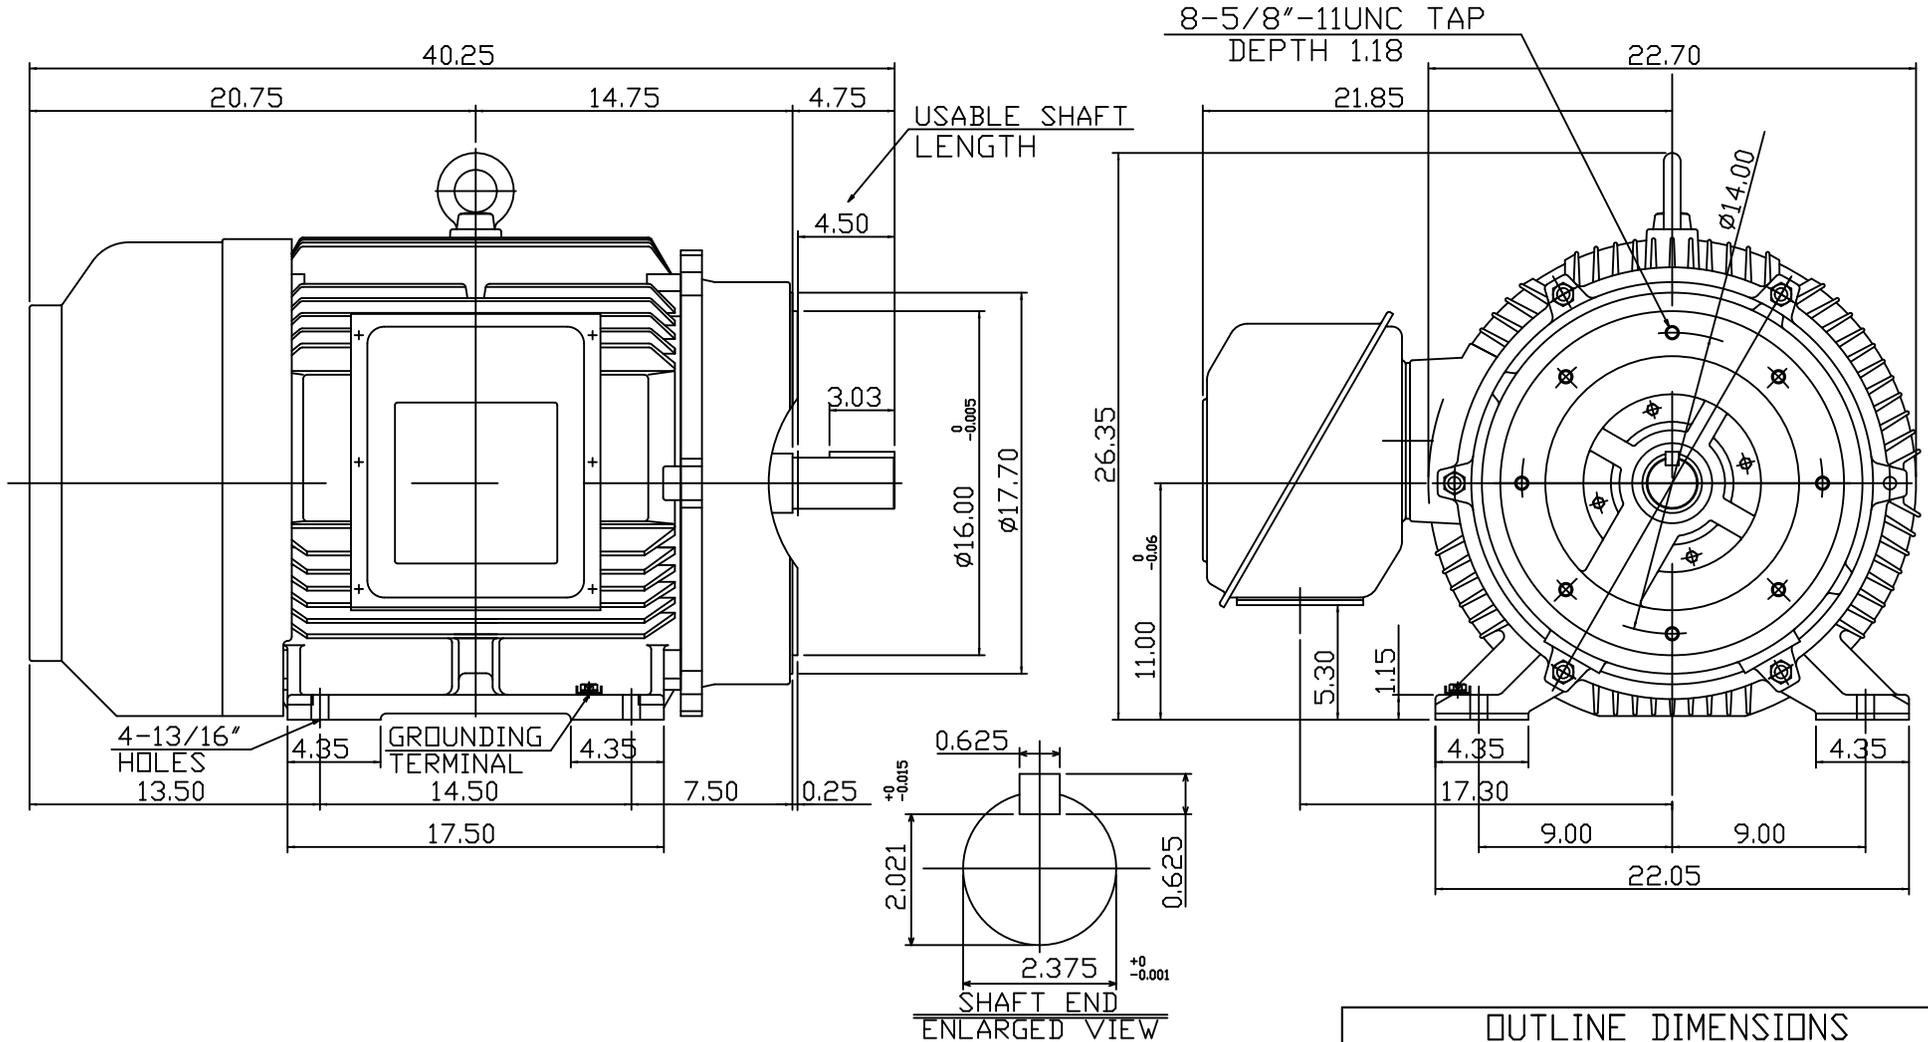

NOTE:

1. FOR DIRECT FLEXIBLE COUPLING
2. ENCLOSURE: IP44 PROTECTION

OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR			
MOTOR TYPE	AEHH8P	FRAME NO.	444TSC
CAT. # NO.	NP1252C	DATE	01-16-13
ORDER NO.			

APPD.	M. D. TSAI	05-02-11
CHKD.	K. L. KUD	05-02-11
DWG.	S. H. LIN	04-28-11

TEC Westinghouse

DWG NO.  
31057C020010