

11

10

9

8

7

6

5

4


3

2


1

POLE	HP	kW	Hz	VOLT	r/min(RPM)	INS	RATING	DIMENSION IN	APPROX WEIGHT	BEARINGS
4	125	93	60	230/460	1800	F	CONT.	INCHES	1380lbs	DE: 6318 NDE: 6316

TOTALLY ENCLOSED FAN COOLED TYPE. SQUIRREL-CAGE ROTOR

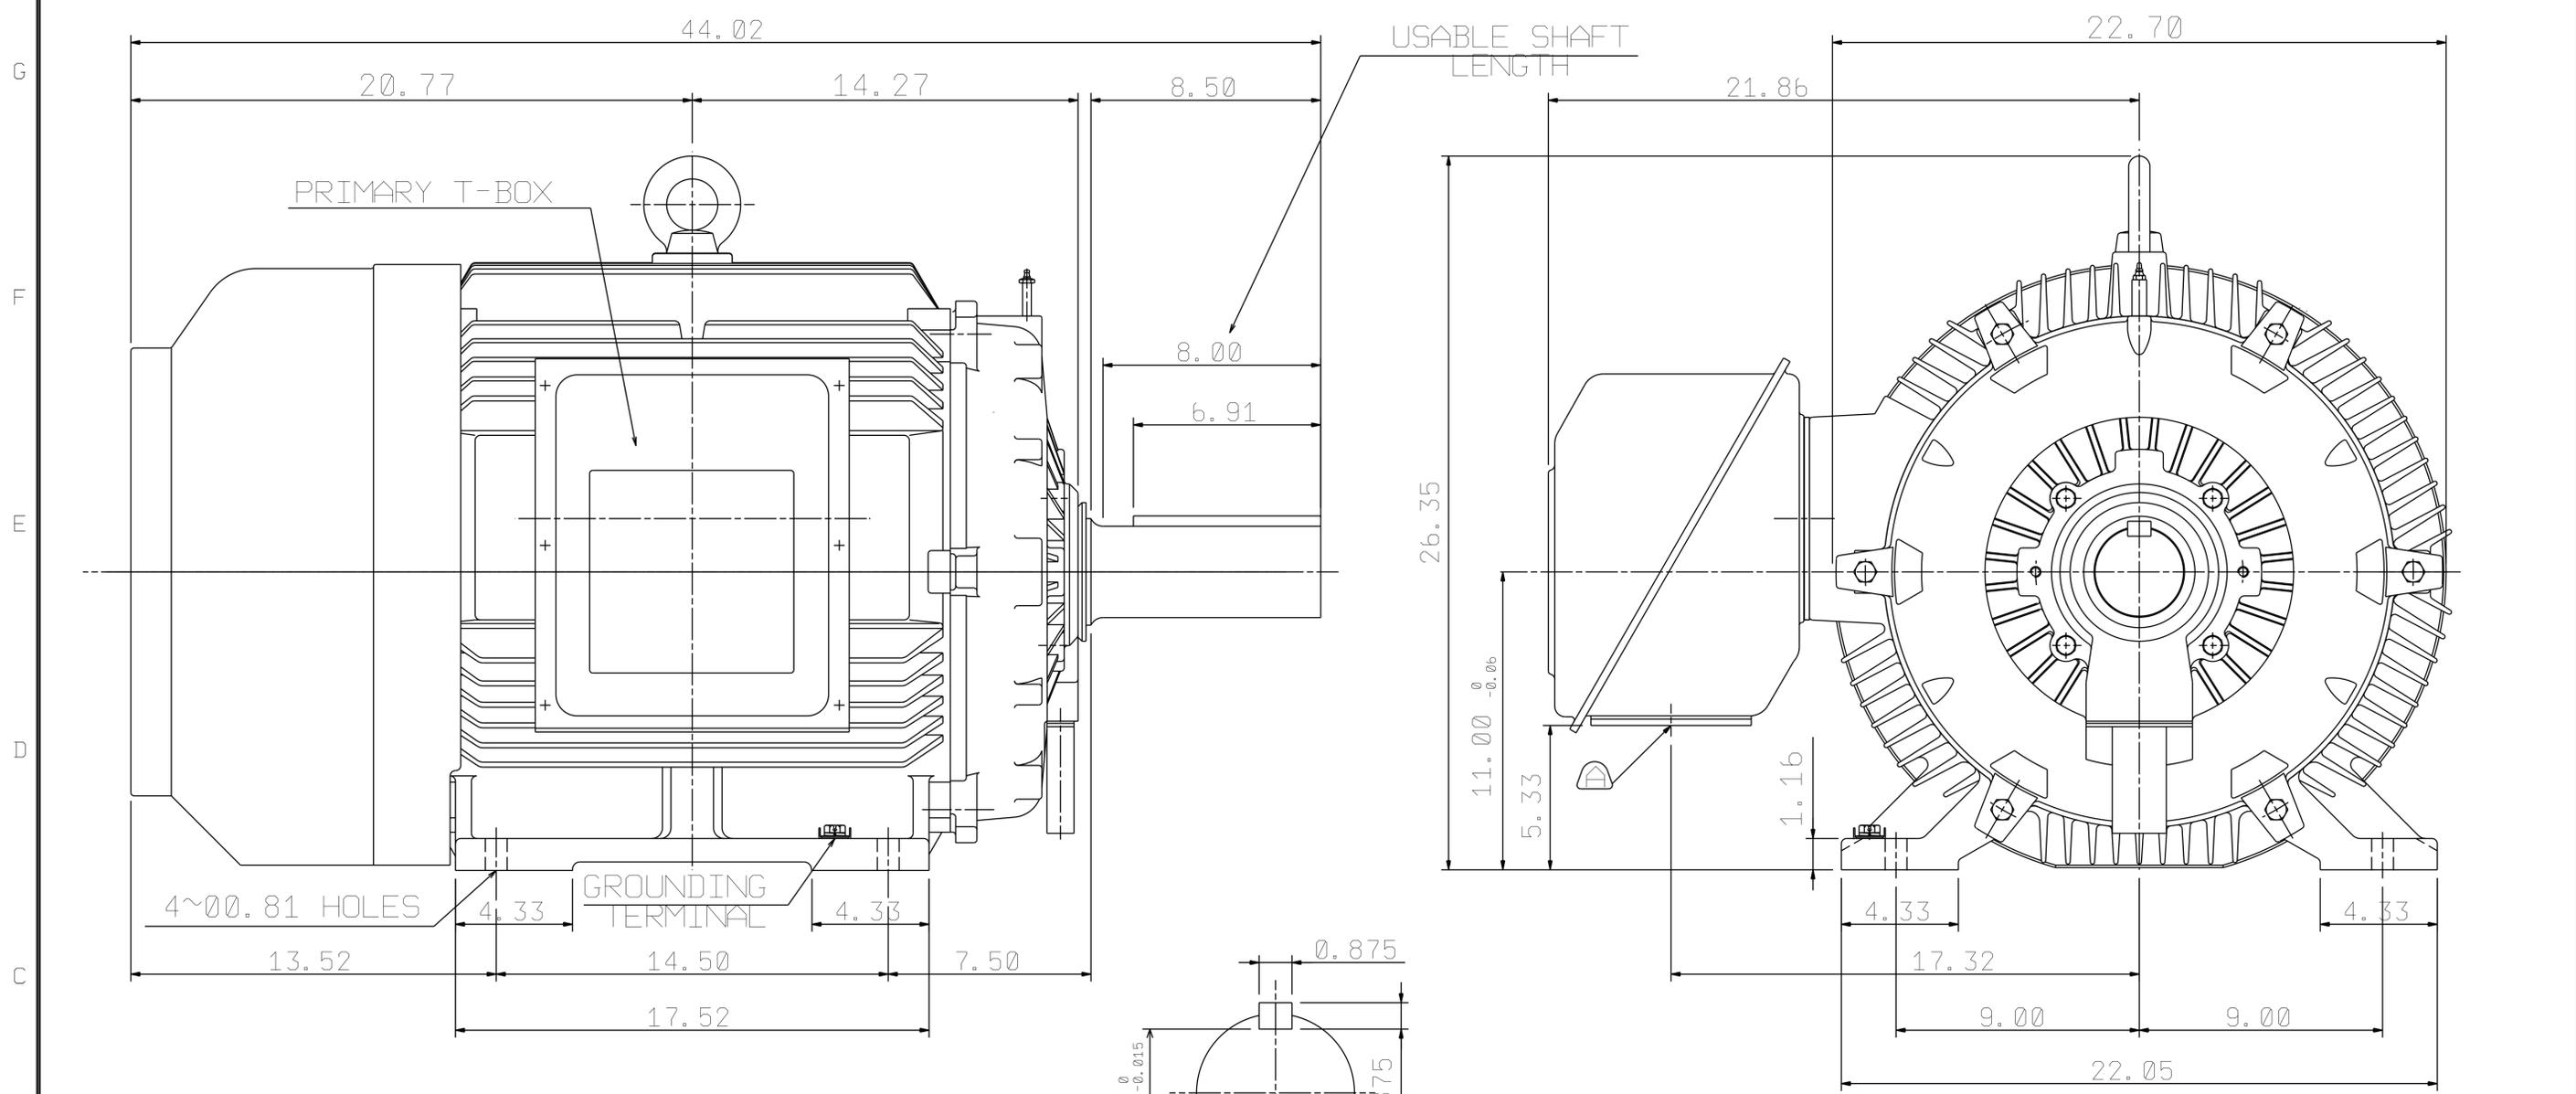

NOTE:
 1. FOR DIRECT FLEXIBLE COUPLING
 2. ENCLOSURE: IP54 PROTECTION



REMOVABLE COVER FOR CABLE ENTRY TO BE DRILLED BY THE CUSTOMER.

OUTLINE DIMENSIONS			
3-PHASE INDUCTION MOTOR			
MOTOR TYPE	AEHH8P	FRAME	444T
CATALOG	NP1254	DATE	MARCH. 5, 2020
ORDER NO.		TRANS. SHEET	

APPD.	BEN. YANG	04.08.19
CHKD.	K. L. KUO	04.08.19
DWG.	K. L. KUO	01.29.19

TEC Westinghouse

DWG NO.
31057C523171

06.13.19	Show approx weight	K. L. KUO
----------	--------------------	-----------

11

10

9

8

7

6

5

4

3

2

1