

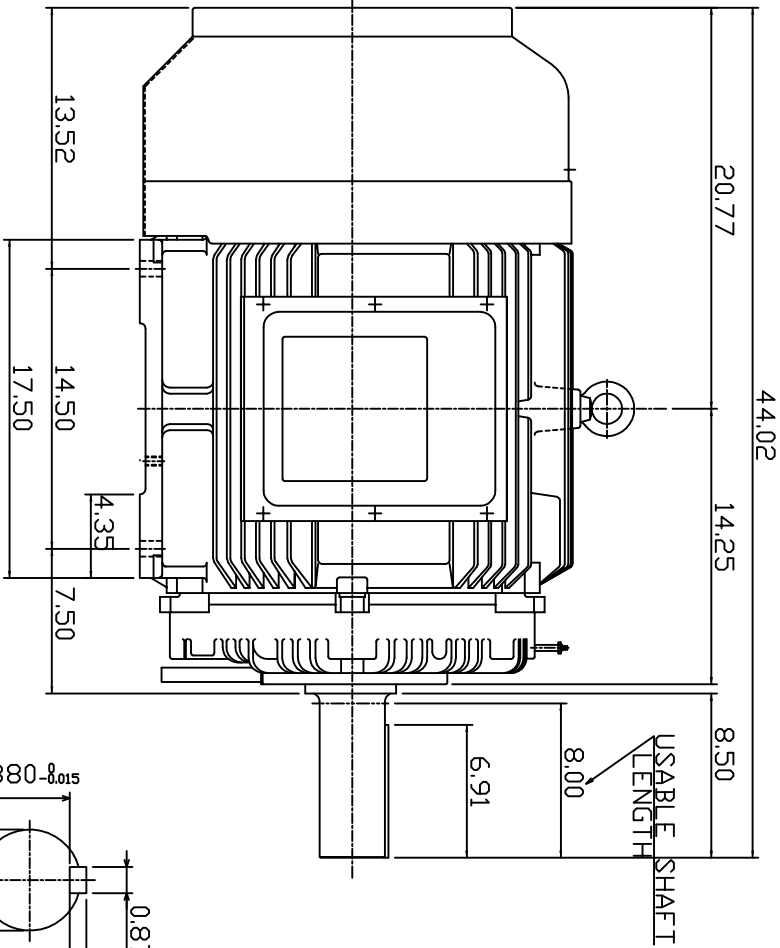


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
AEHH8P	125	93.3	4	CONT.	190/380	50	1500

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

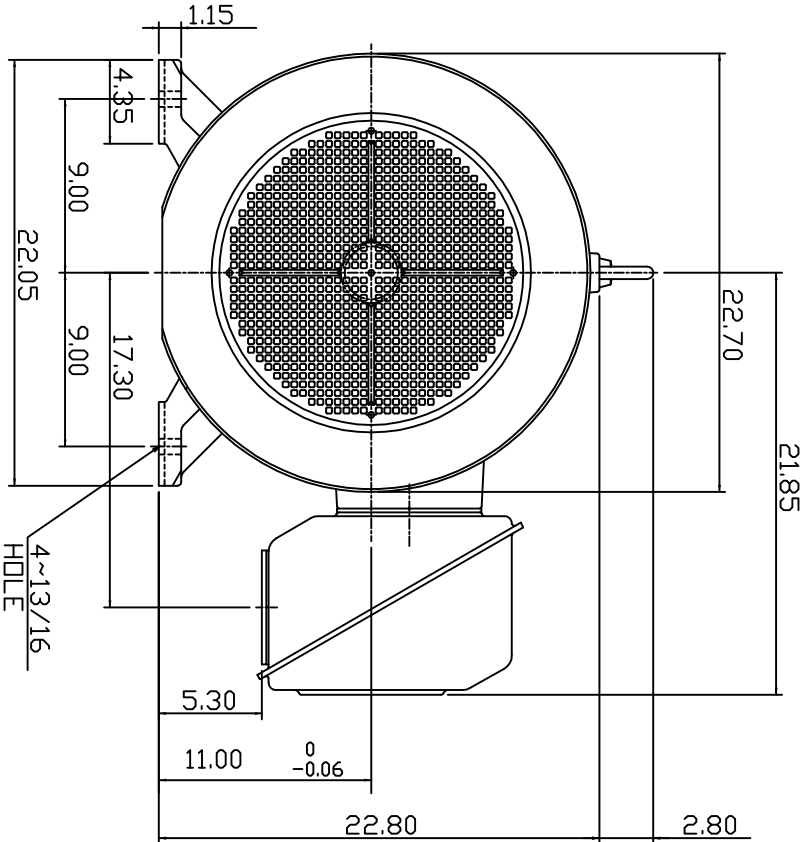

NOTE:

- 1. DIMENSIONS IN INCHES
- 2. FRAME SIZE 444T
- 3. F CLASS INSULATION, S.F. 1.0
- 4. FOR BELTED APPLICATION
- 5. BEARING NO.: DRIVE END: NU318C3
OPP. DRIVE END: 6316C3
- 6. ENCLOSURE: IP44
- 7. APPRDX. WEIGHT: 1500 LBS

DWN.	SLEE	JAN. 26 .2011
CHKD.	SLEE	JAN. 26 .2011
APPD.	H.LIU	JAN. 26 .2011

DATE	FEB. 11, 2011	OUTLINE DIMENSIONS
CATALOG #	NP1254R	
3-PHASE INDUCTION MOTOR		



DWG NO. 3A049DWB10464-25
REV. 00