

11

10

9

8

7

6

5

4


3

2

1

PHASE	HP	kW	Hz	VOLT	r/min (RPM)	INS	RATING	DIMENSION IN	APPROX WEIGHT	BEARINGS
6	125	93.3	60	230/460	1200	F	CONT.	INCHES	1691 lbs	DE: 6318 NDE: 6316

TOTALLY ENCLOSED FAN COOLED-CAGE ROTOR

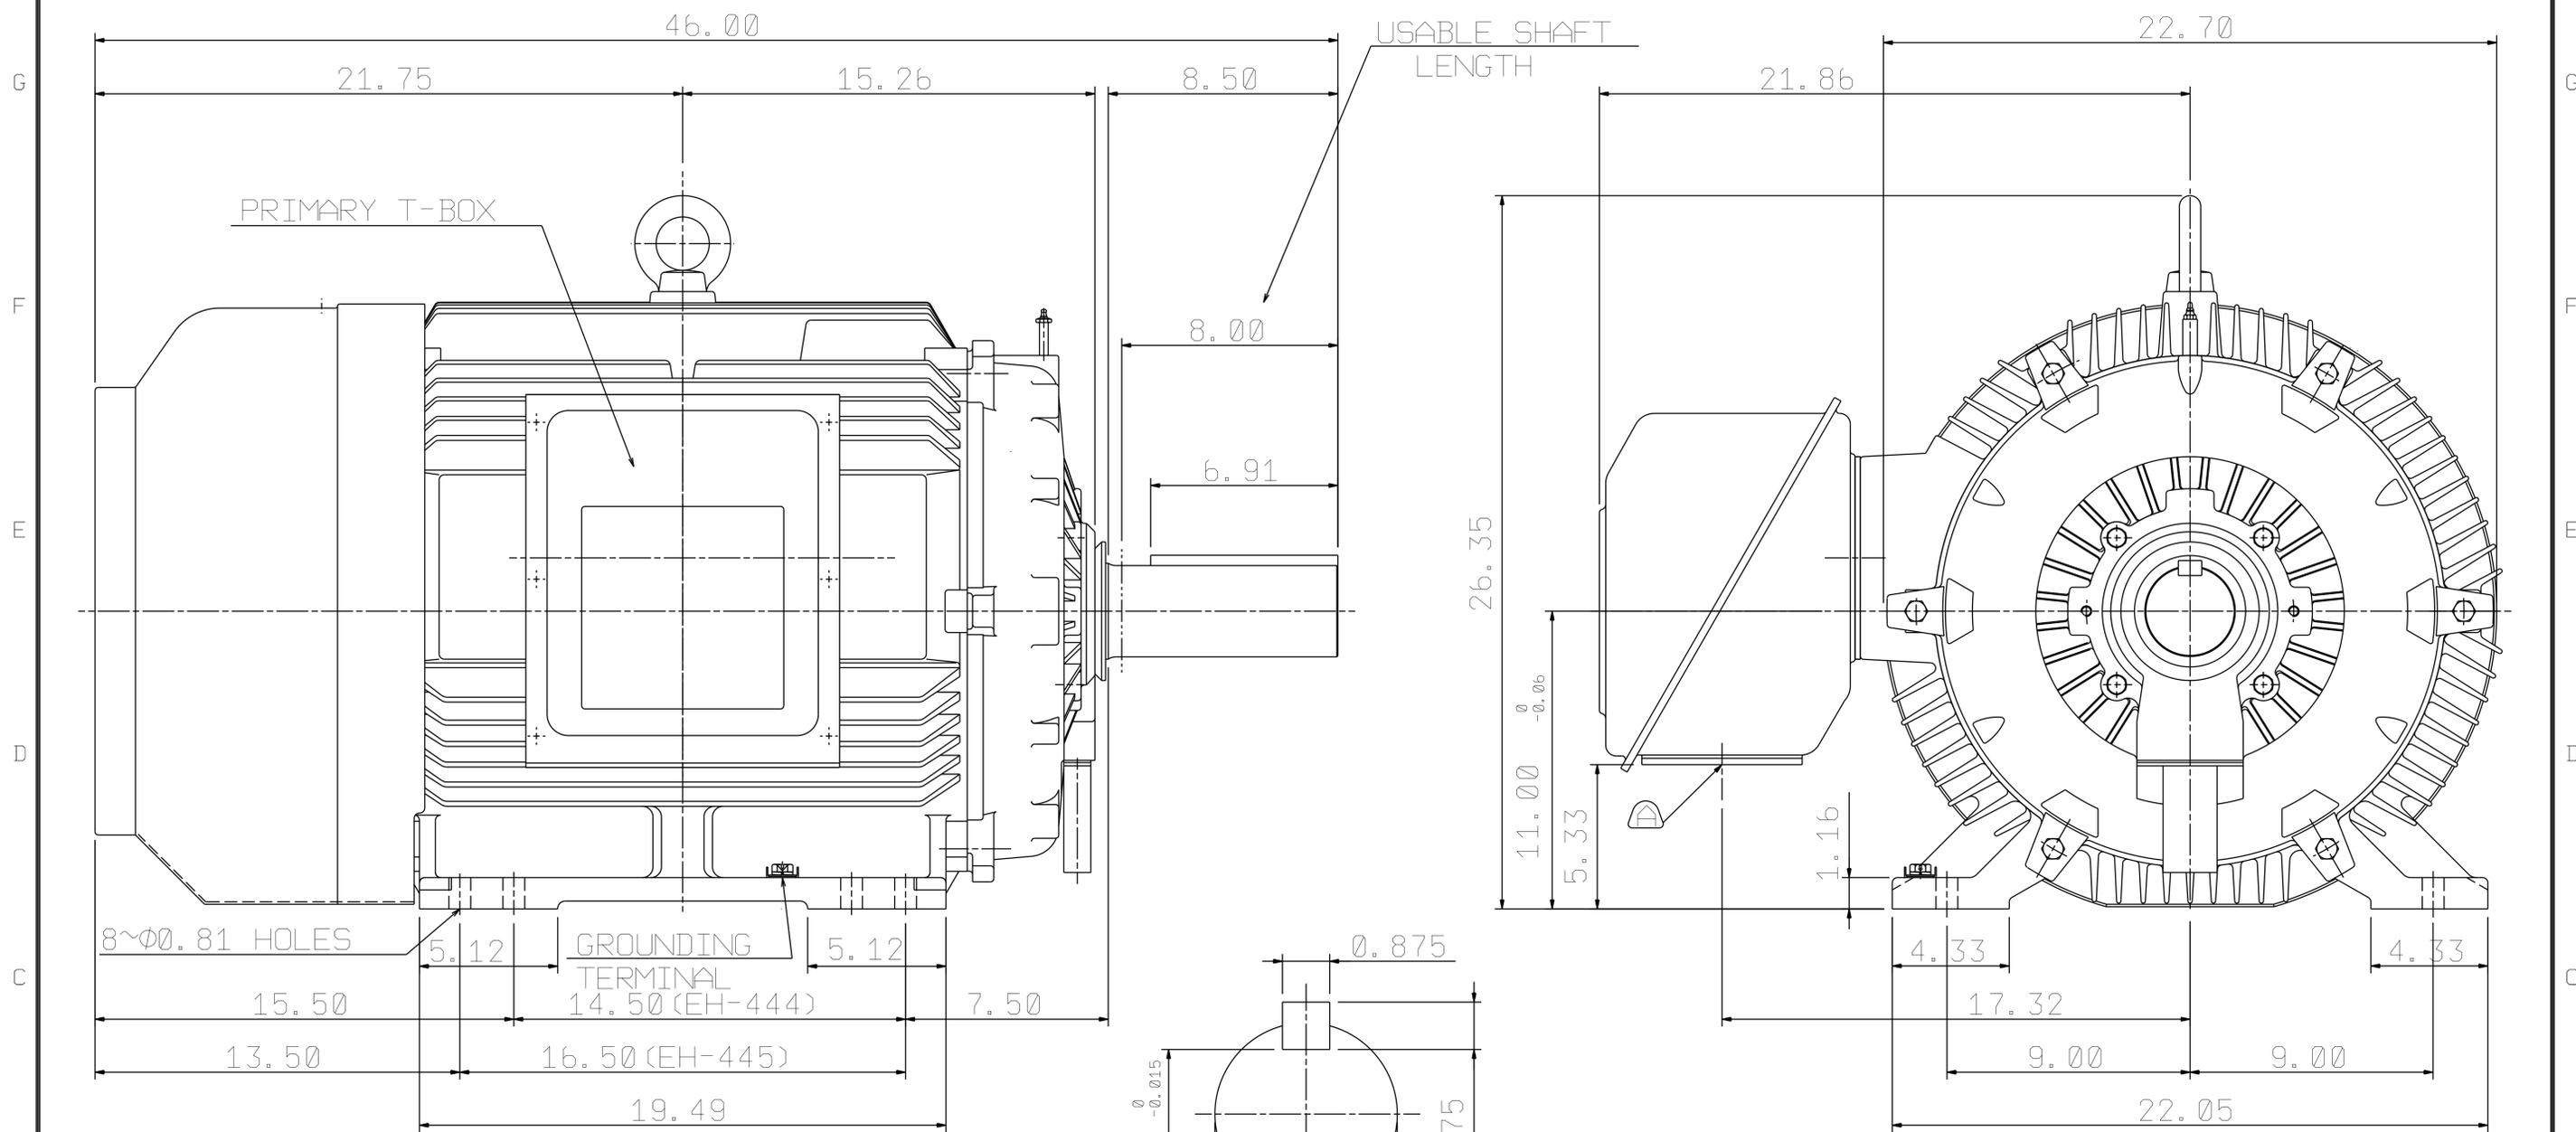

NOTE:
 1. FOR DIRECT FLEXIBLE COUPLING
 2. ENCLOSURE: IP54 PROTECTION

REMOVABLE COVER FOR CABLE ENTRY TO BE DRILLED BY THE CUSTOMER.

OUTLINE DIMENSIONS			
3-PHASE INDUCTION MOTOR			
MOTOR TYPE	AEHH8P	FRAME NO.	445T
CATALOG #	NP1256	DATE	MARCH. 9, 2020
ORDER NO.		TRANS. SHEET	

APPD.	BEN. YANG	06.13.19
CHKD.	K.L. KUO	06.13.19
DWG.	K.L. KUO	06.13.19

TEC Westinghouse

DWG NO.
31057C524090

6.13.19	Show Approx Weight	K. L. KUO
---------	--------------------	-----------

11

10

9

8

7

6

5

4

3

2

1