

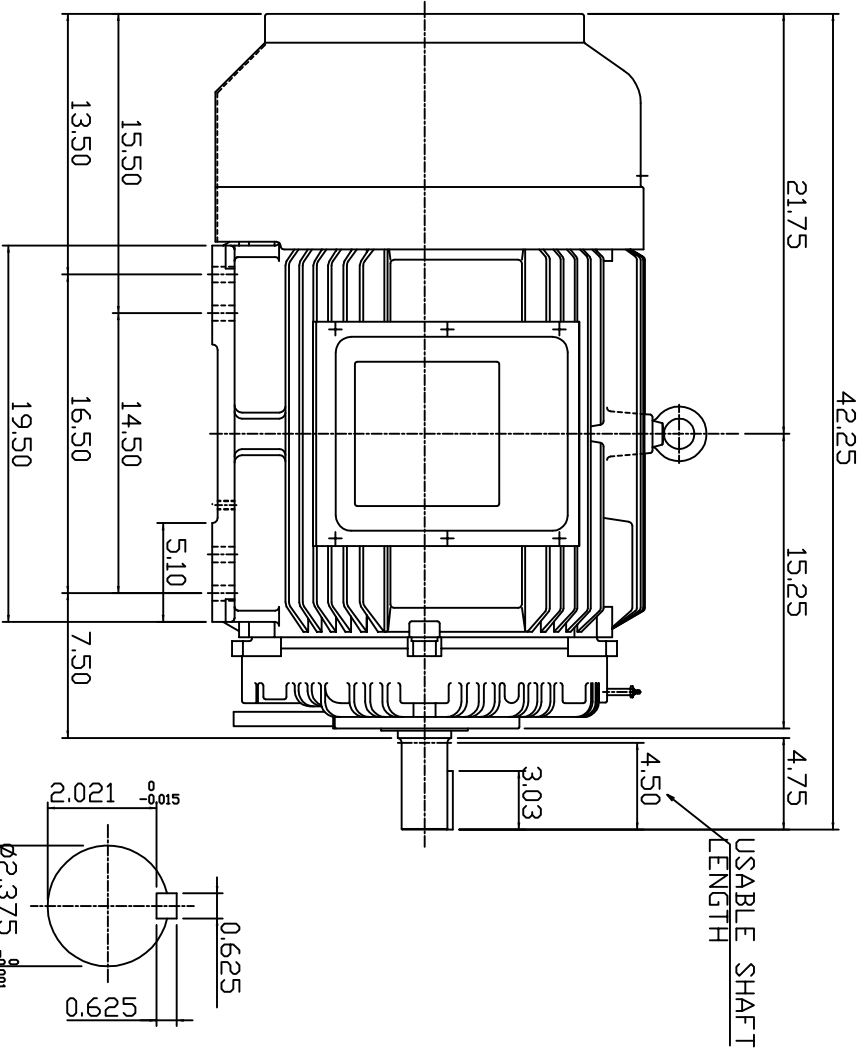


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	K.W.					
AEHH8P	150	111.9	2	CONT.	380	50	3000

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

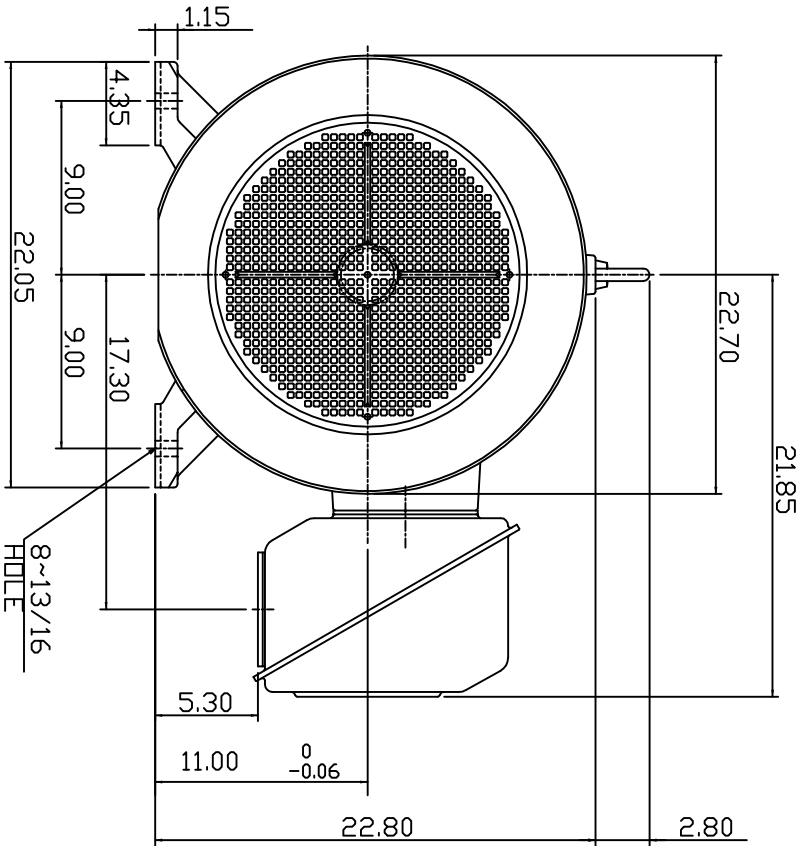

NOTE:

1. DIMENSIONS IN INCHES
2. FRAME SIZE 445TS
3. F CLASS INSULATION, S.F. 1.0
4. FOR DIRECT FLEXIBLE COUPLING
5. BEARING NO.; DRIVE END: 6314C3
OPP. DRIVE END: 6314C3
6. ENCLOSURE: IP44
7. APPRDX. WEIGHT: 1600 LBS

DWN.	S.LEE	JAN. 26 .2011
CHKD.	S.LEE	JAN. 26 .2011
APPD.	H.LIU	JAN. 26 .2011

DATE FEB. 11, 2011	OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR
CATALOG #: NP1502	



DWG NO. 3A049DWB10464-22
REV: 00