

11

10

9

8

7

6

5

4


3

2

1

POLE	HP	kW	Hz	VOLT	r/min(RPM)	INS	RATING	DIMENSION IN	APPROX WEIGHT	BEARINGS
6	150	111.9	60	460	1200	F	CONT.	INCHES	2073lbs	DE: 6320 NDE: 6316

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

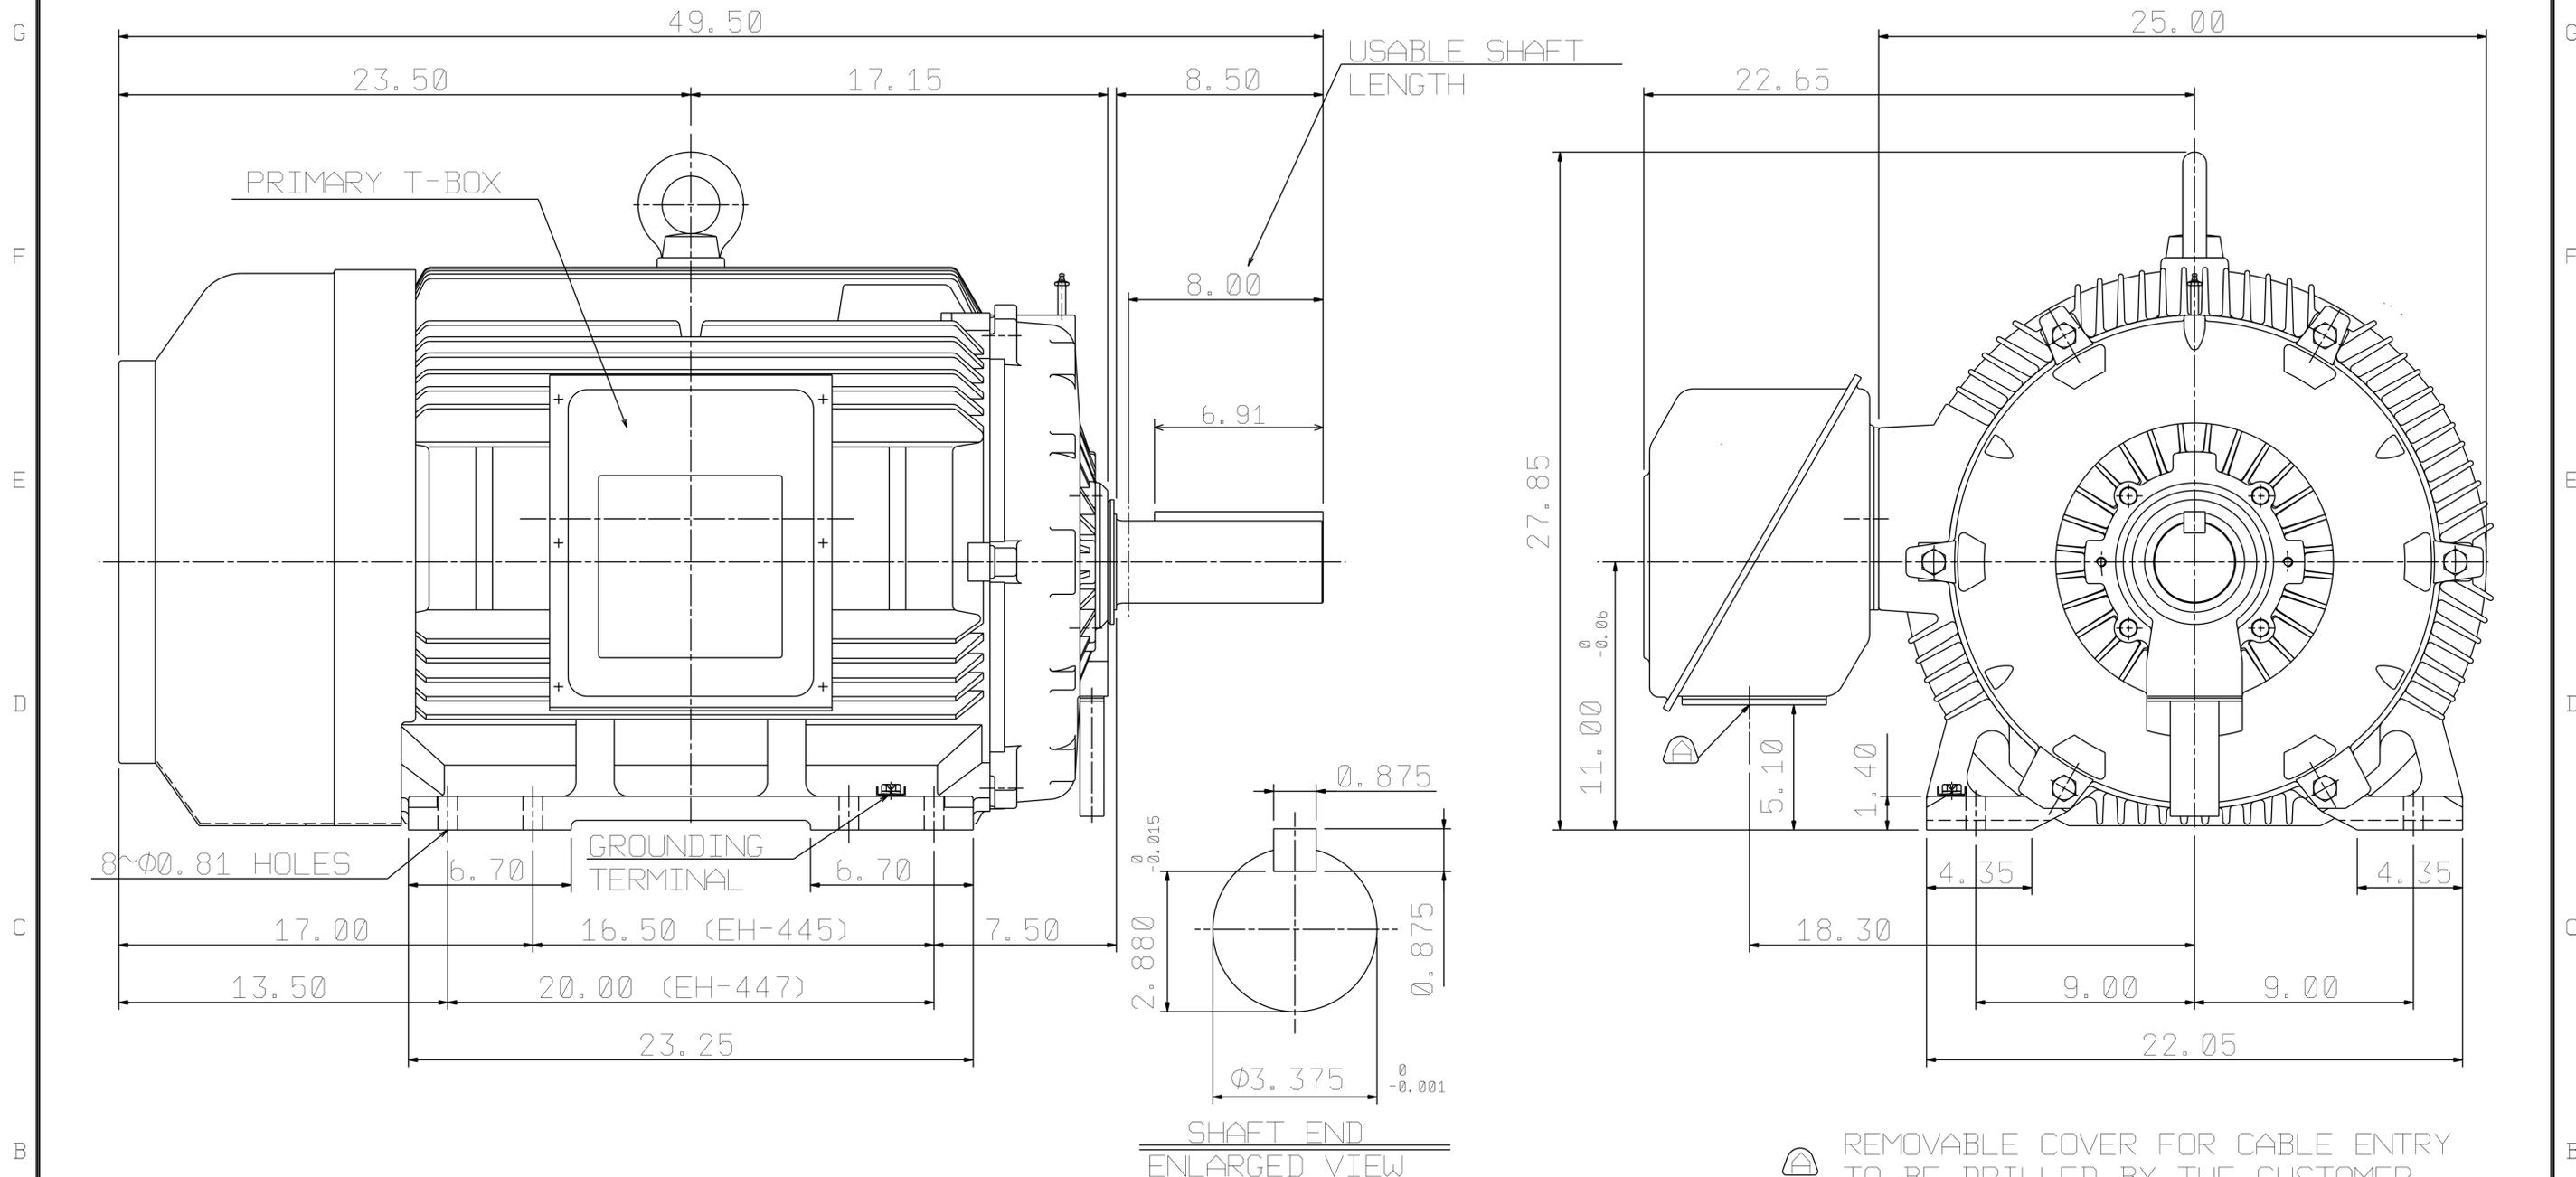

REMOVABLE COVER FOR CABLE ENTRY TO BE DRILLED BY THE CUSTOMER.

NOTE:

- 1. FOR DIRECT FLEXIBLE COUPLING
- 2. ENCLOSURE: IP54 PROTECTION

OUTLINE DIMENSIONS  
3-PHASE INDUCTION MOTOR

MOTOR TYPE	AEHH8P	FRAME NO.	447T
CATALOG #	NP1506	DATE	MARCH, 10, 2020
ORDER NO.		TRANS. SHEET	

APPD.	BEN. YANG	06.13.19
CHKD.	K. L. KUO	06.13.19
DWG.	K. L. KUO	06.13.19

TEC Westinghouse

DWG NO. 31057C525140

06.13.19	Show Approx Weight	K. L. KUO
----------	--------------------	-----------

11

10

9

8

7

6

5

4

3

2

1