
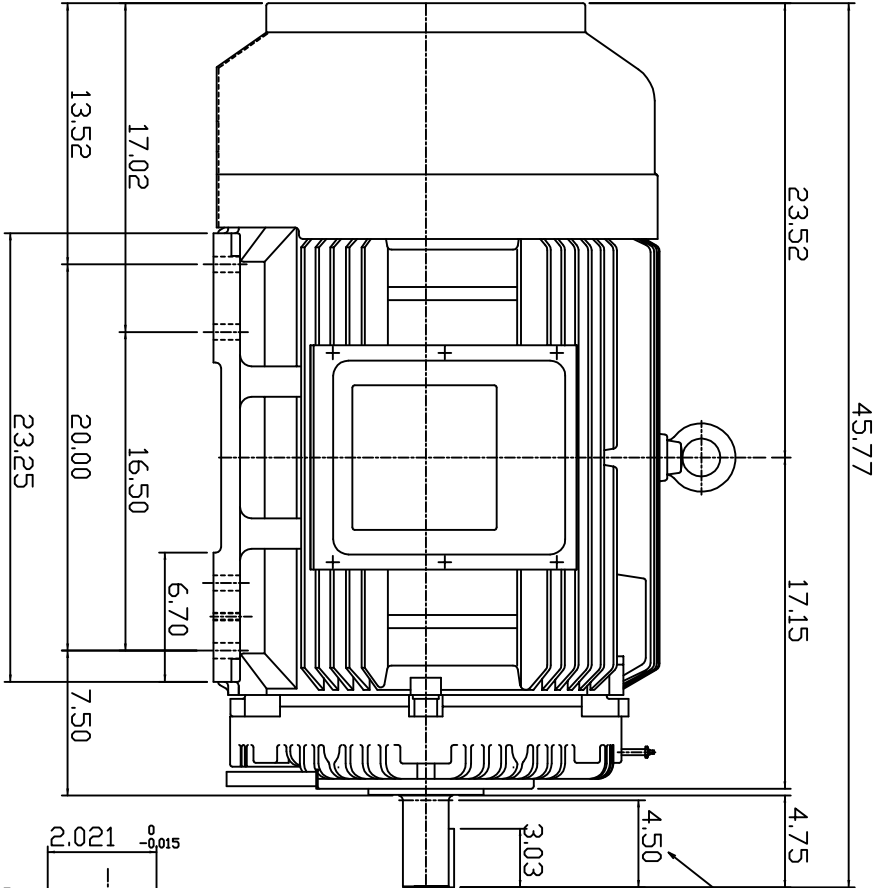


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	KW.					
AEHH8P	200	149.2	2	CDNT.	380	50	3000

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

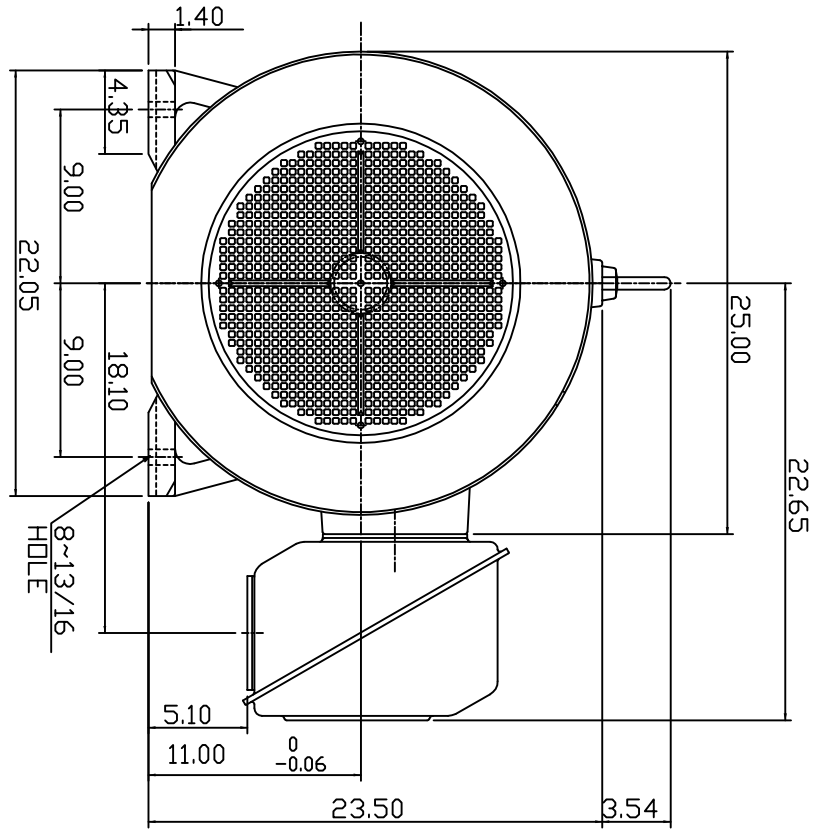

SHAFT END
[ENLARGED VIEW]

- NOTE:
1. DIMENSIONS IN INCHES
 2. FRAME SIZE 447TS
 3. F CLASS INSULATION, S.F. 1.0
 4. FOR DIRECT FLEXIBLE COUPLING
 5. BEARING NO.: DRIVE END: 6314C3
DPP, DRIVE END: 6314C3
 6. ENCLOSURE: IP44
 7. APPRDX. WEIGHT: 1900 LBS

DATE		FEB. 11, 2011		OUTLINE DIMENSIONS	
CATALOG #:		NP2002		3-PHASE INDUCTION MOTOR	
DWN.	S.LEE	JAN. 26 .2011		DWG NO.	REV: 00
CHKD.	S.LEE	JAN. 26 .2011		3A049DWB10464-23	
APPD.	H.LIU	JAN. 26 .2011			
TEEC  Westinghouse					