

11

10

9

8

7

6

5

4


3

2

1

POLE	HP	kW	Hz	VOLT	r/min(RPM)	INS	RATING	DIMENSION IN	APPROX WEIGHT	BEARINGS
2	200	150	60	460	3600	F	CONT.	INCHES	1716 lbs	DE: 6314C3 NDE: 6314C3

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

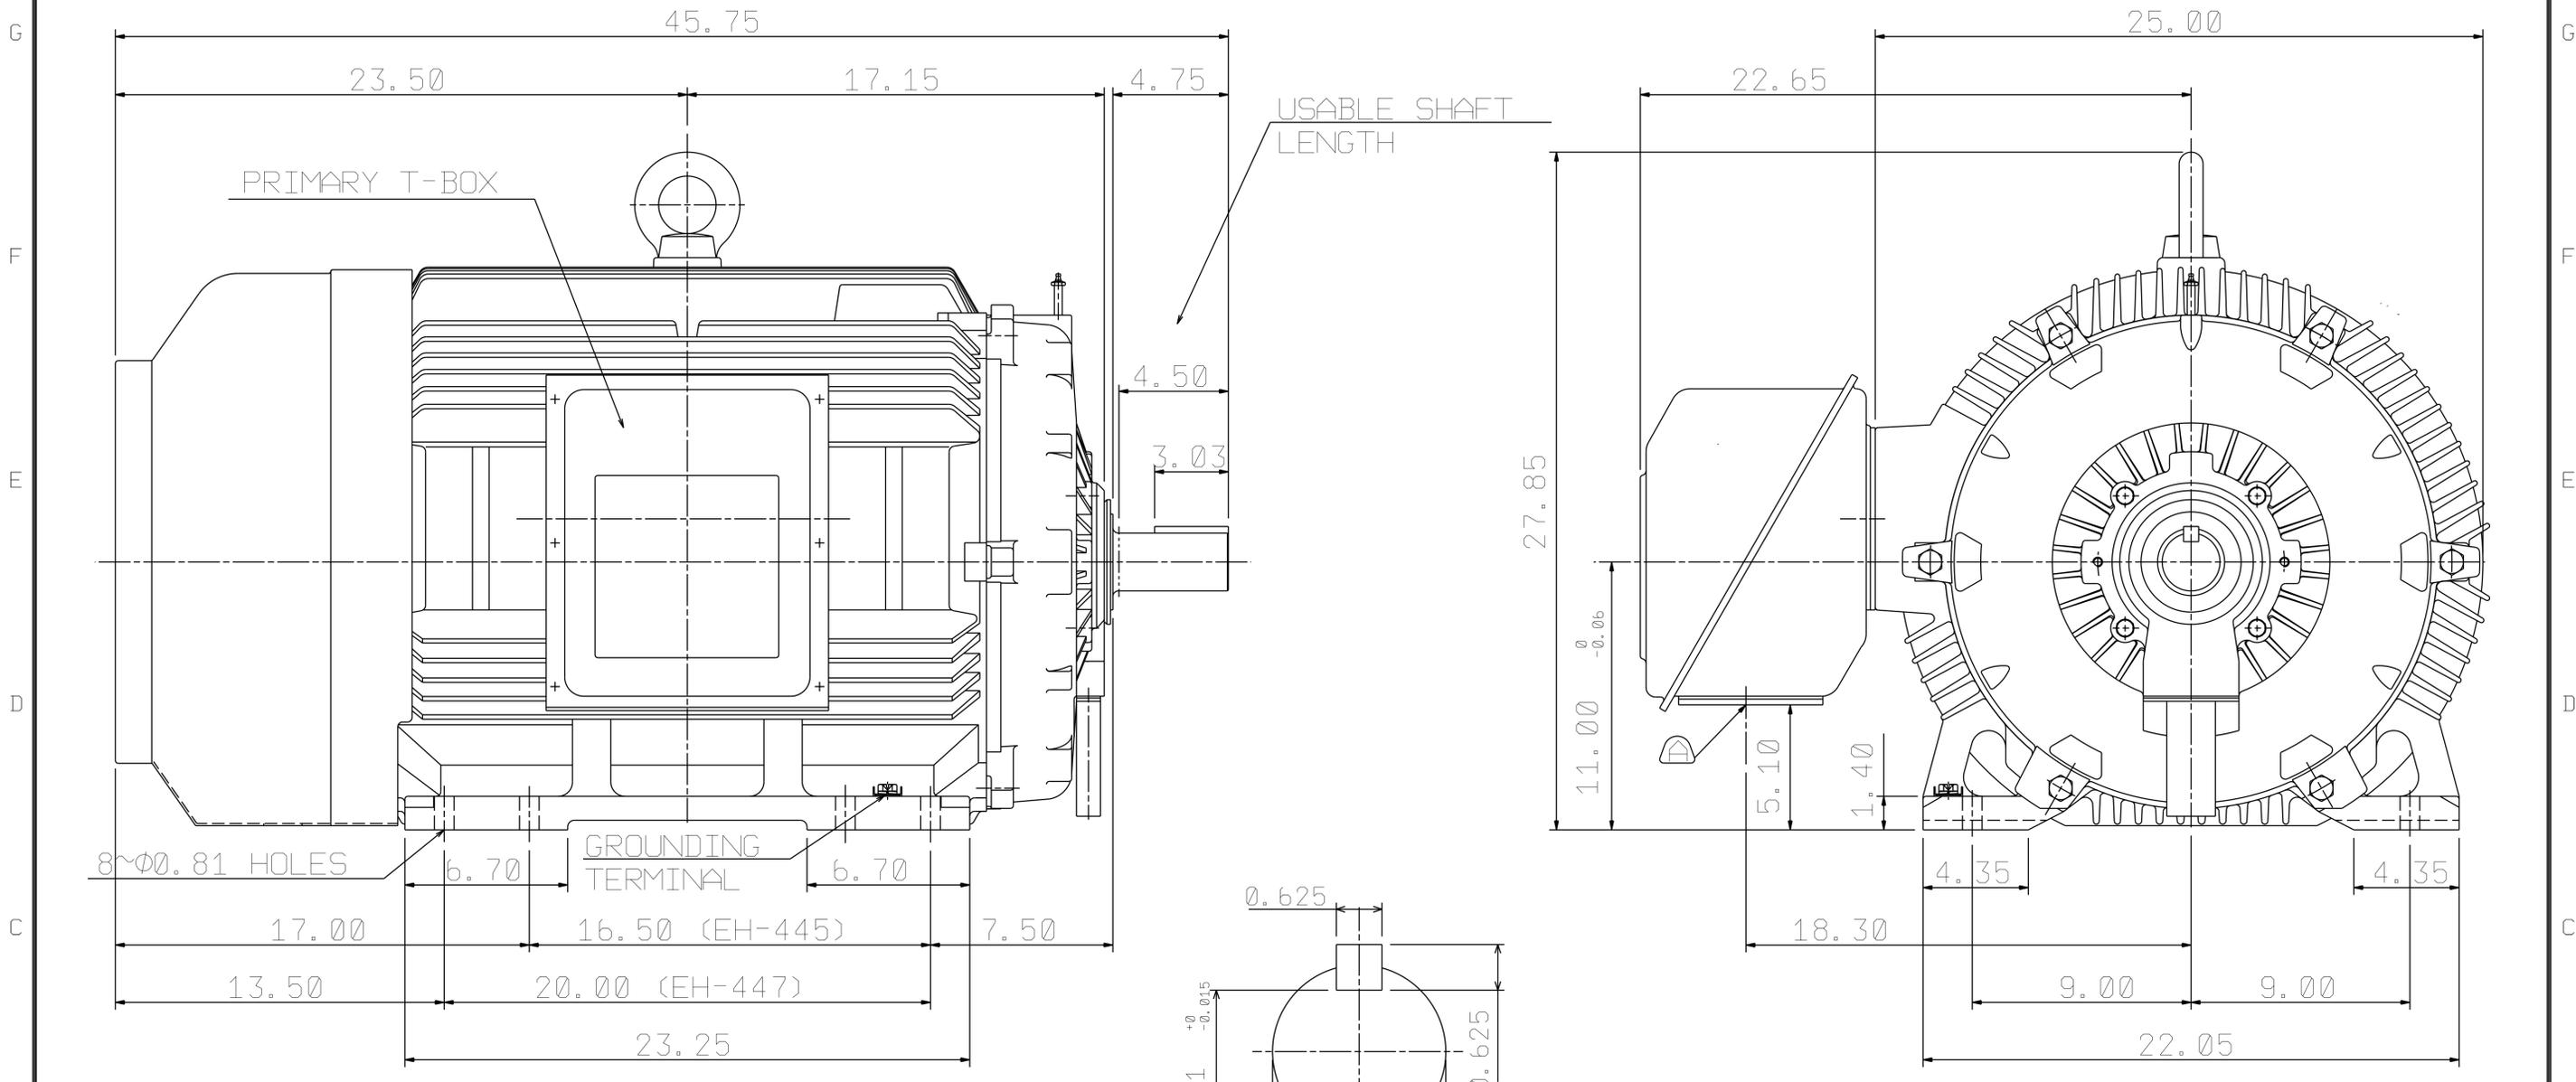

NOTE:
 1. FOR DIRECT FLEXIBLE COUPLING
 2. ENCLOSURE: IP54 PROTECTION

REMOVABLE COVER FOR CABLE ENTRY TO BE DRILLED BY THE CUSTOMER.

OUTLINE DIMENSIONS			
3-PHASE INDUCTION MOTOR			
MOTOR TYPE	AEHH8P	FRAME NO.	447TS
CATALOG #	NP2002	DATE	MARCH, 9, 2020
ORDER NO.		TRANS. SHEET	

APPD.	BEN. YANG	04.08.19
CHKD.	K.L. KUO	04.08.19
DWG.	K.L. KUO	02.12.19

TEC Westinghouse

DWG NO.
31057C525131

06.13.19 Show approx weight K.L. KUO

11

10

9

8

7

6

5

4

3

2

1