

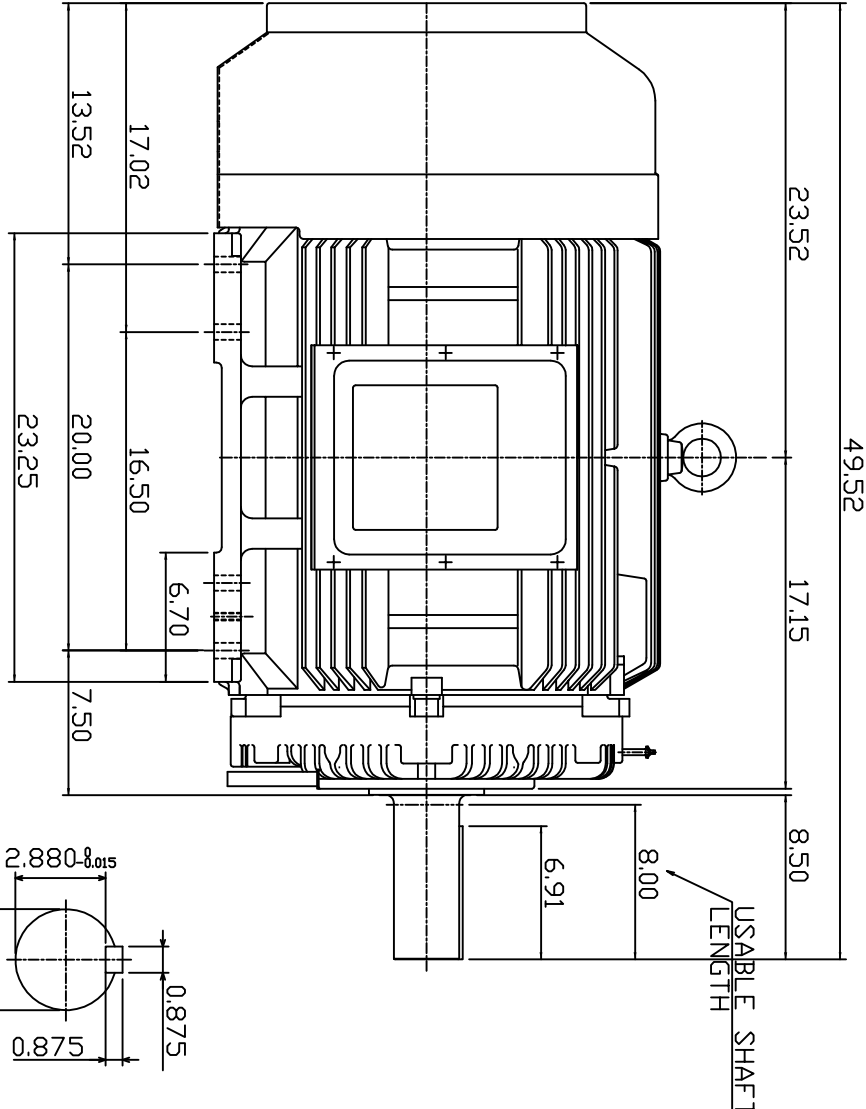


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED R.P.M
	HP.	K.W.					
AEHH8P	200	149.2	4	CDNT.	380	50	1500

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

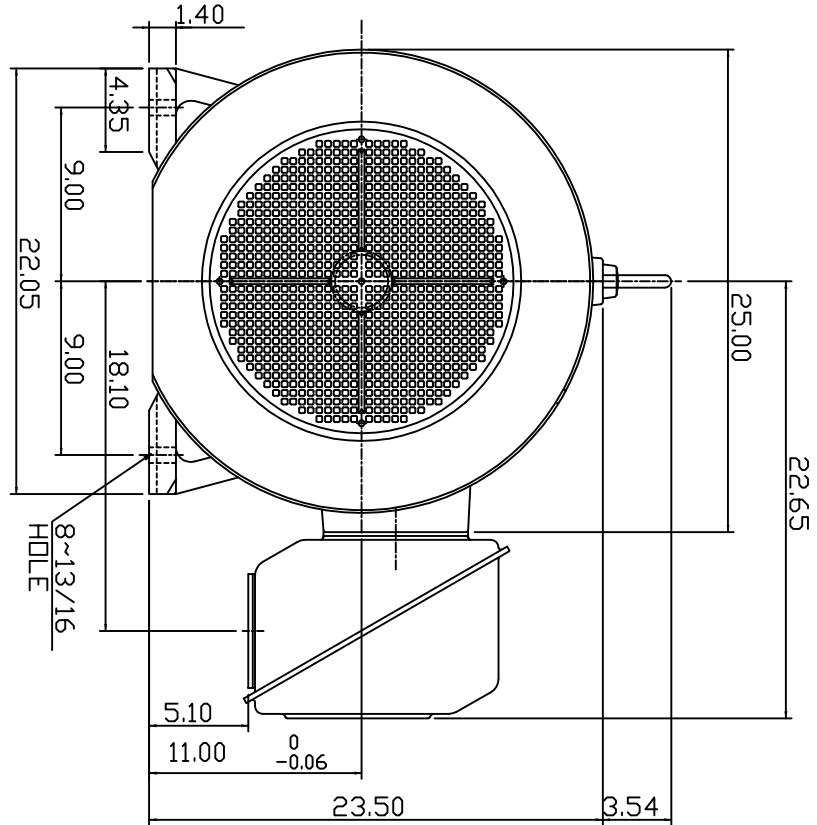

- NOTE:
- 1. DIMENSIONS IN INCHES
 - 2. FRAME SIZE 447T
 - 3. F CLASS INSULATION, S.F. 1.0
 - 4. FOR DIRECT FLEXIBLE COUPLING
 - 5. BEARING NO.: DRIVE END: 6320C3
DPP, DRIVE END: 6316C3
 - 6. ENCLOSURE: IP44
 - 7. APPRDX. WEIGHT: 2300 LBS

DATE
MARCH 2, 2011

CATALOG #
NP2004

OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR

DWN. SLEE

SLEE

CHKD. SLEE

APPD. H.LIU

JAN. 26 -2011

JAN. 26 -2011

JAN. 26 -2011

JAN. 26 -2011

TEC Westinghouse

DWG NO. 3A049DWB10464-27

REV. 00