

11

10

9

8

7

6

5

4


3

2

1

POLE	HP	kW	Hz	VOLT	r/min (RPM)	INS	RATING	DIMENSION IN	APPROX WEIGHT	BEARINGS
4	200	149	60	460	1800	F	CONT.	INCHES	1923lbs	DE: 6320 NDE: 6316

TOTALLY ENCLOSED FAN COOLED TYPE. SQUIRREL-CAGE ROTOR

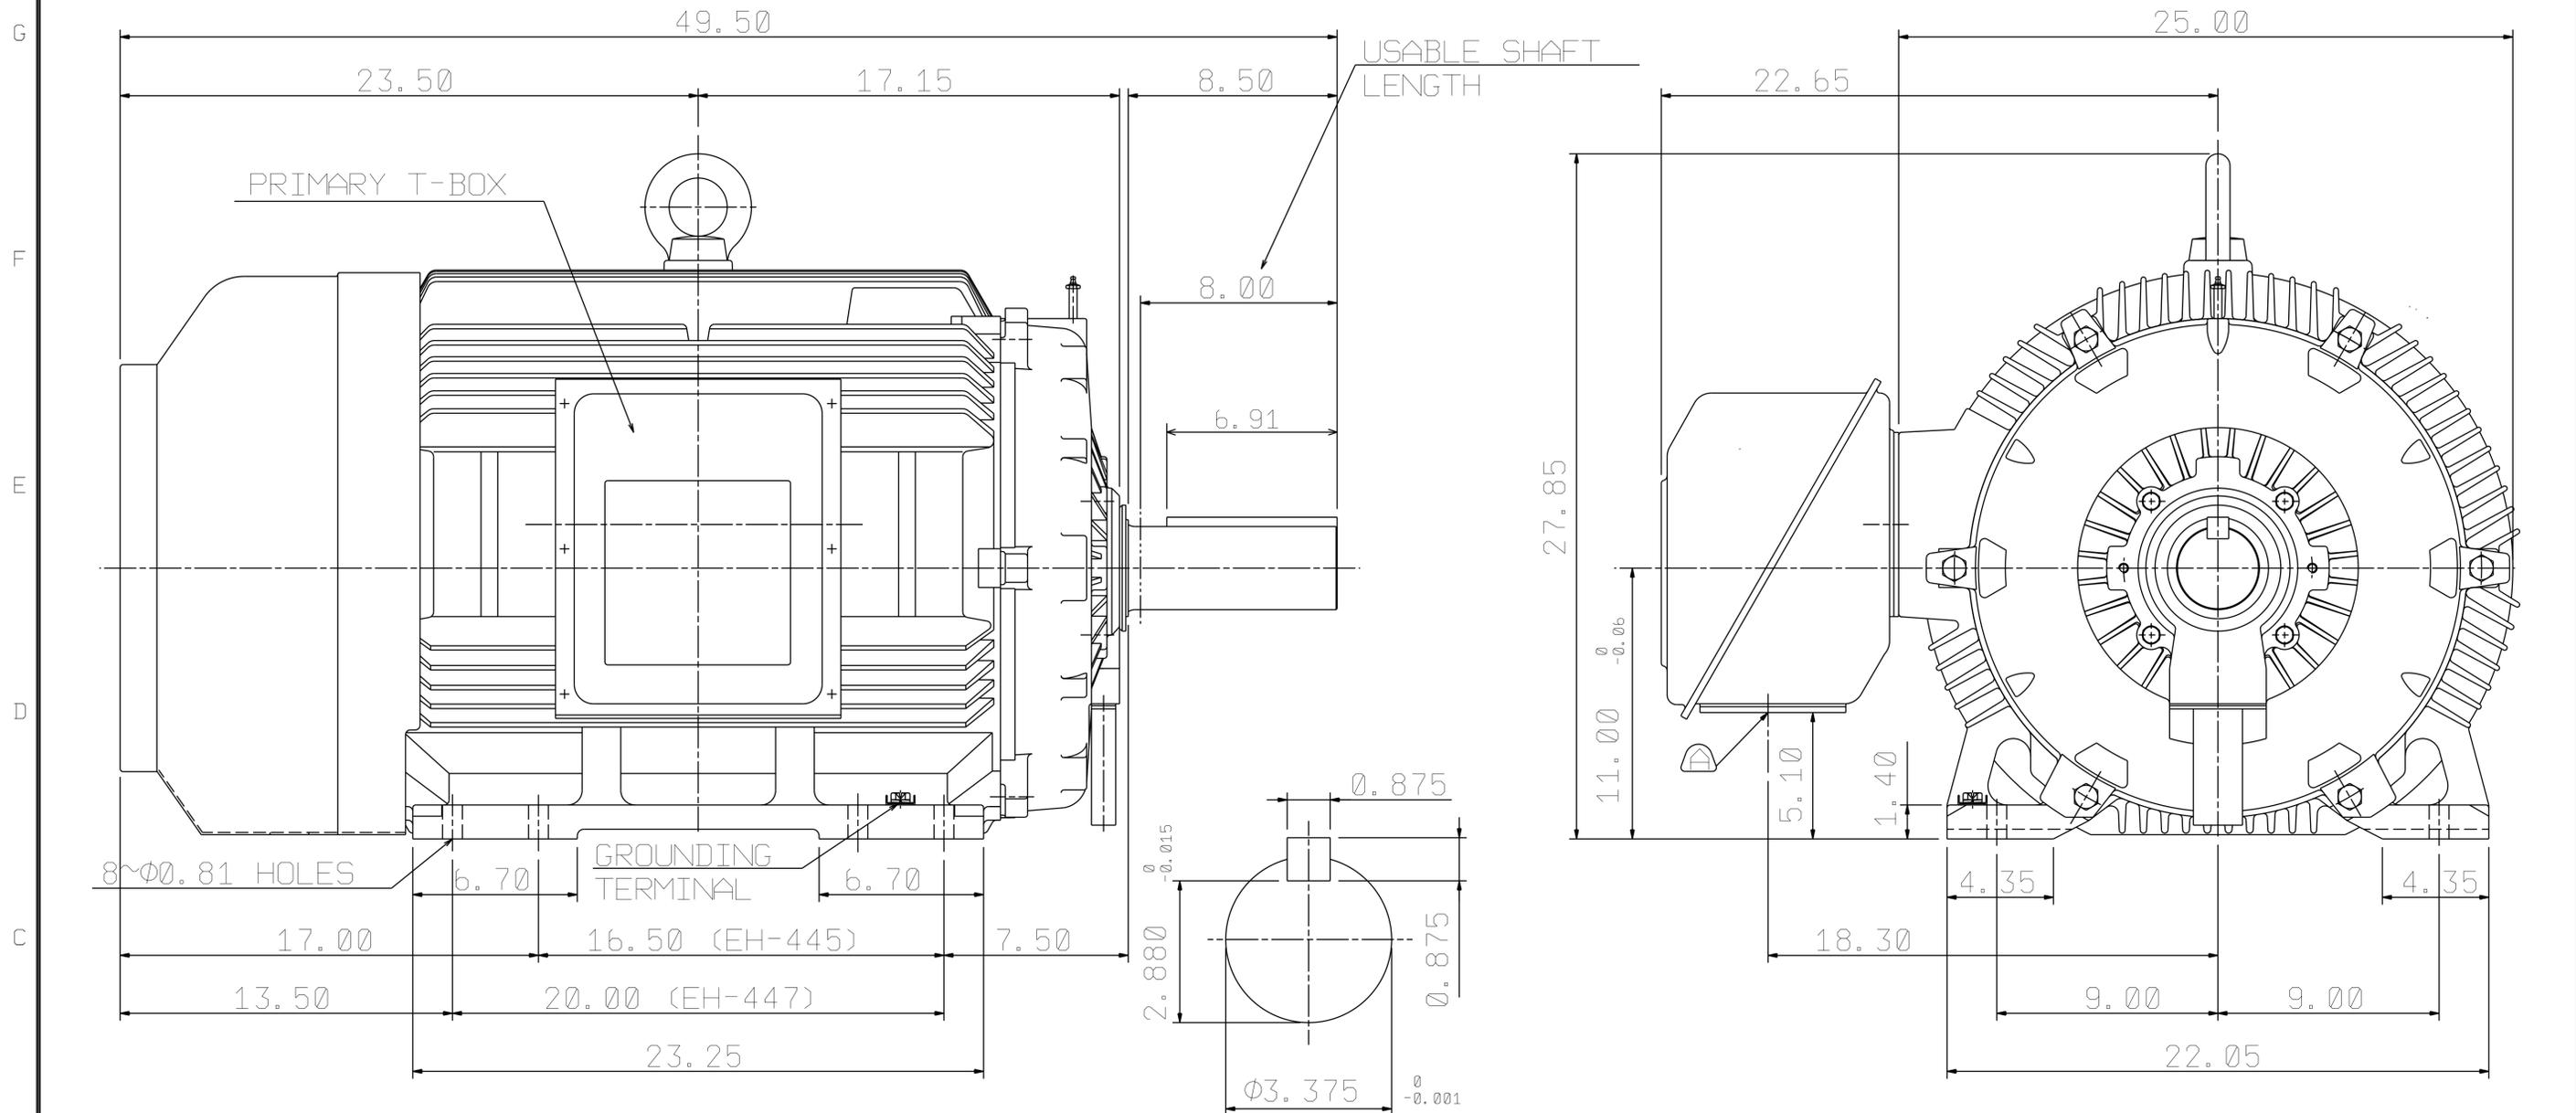

SHAFT END ENLARGED VIEW

REMOVABLE COVER FOR CABLE ENTRY TO BE DRILLED BY THE CUSTOMER.

NOTE:
 1. FOR DIRECT FLEXIBLE COUPLING
 2. ENCLOSURE: IP54 PROTECTION

OUTLINE DIMENSIONS			
3-PHASE INDUCTION MOTOR			
MOTOR TYPE	AEHH8P	FRAME NO.	447T
CATALOG #	NP2004	DATE	MARCH, 9, 2020
ORDER NO.		TRANS. SHEET	

APPD.	BEN. YANG	04.08.19
CHKD.	K. L. KUO	04.08.19
DWG.	K. L. KUO	01.29.19

TEC Westinghouse

DWG NO. 31057C525121

1	06.13.19	Show approx weight	K. L. KUO
---	----------	--------------------	-----------

11

10

9

8

7

6

5

4

3

2

1