

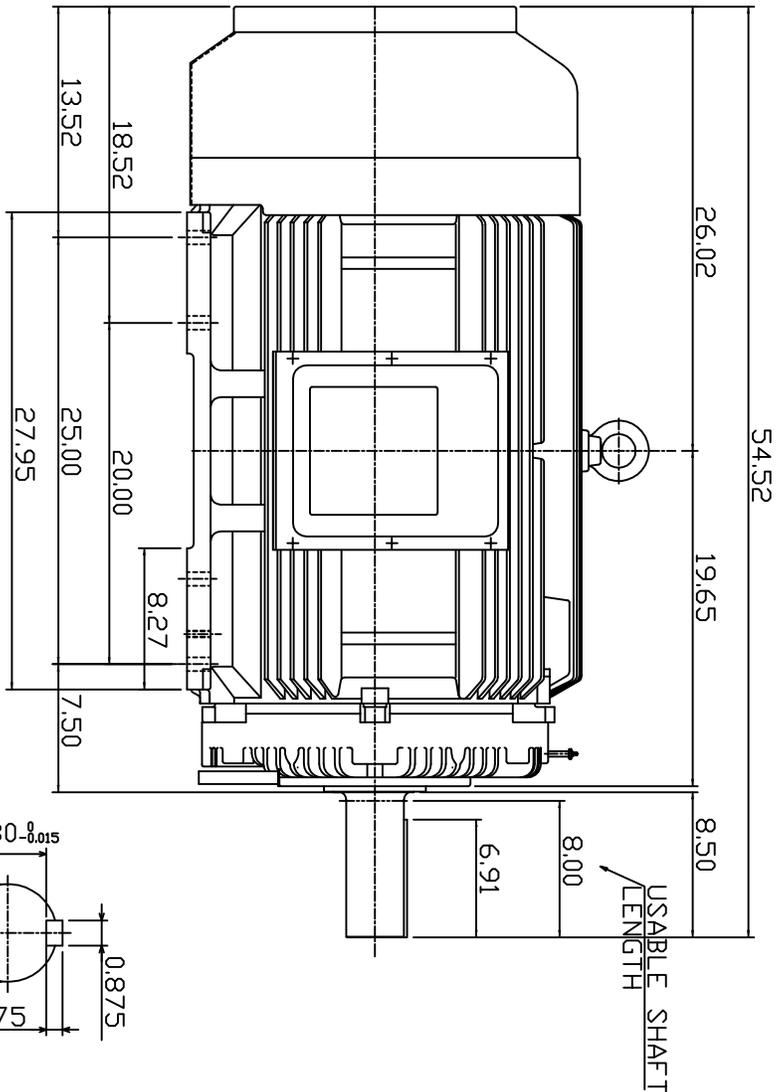


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN SPEED RPM
	HP.	KW.					
AEHH8P	200	149.2	6	CDNT.	380	50	1000

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

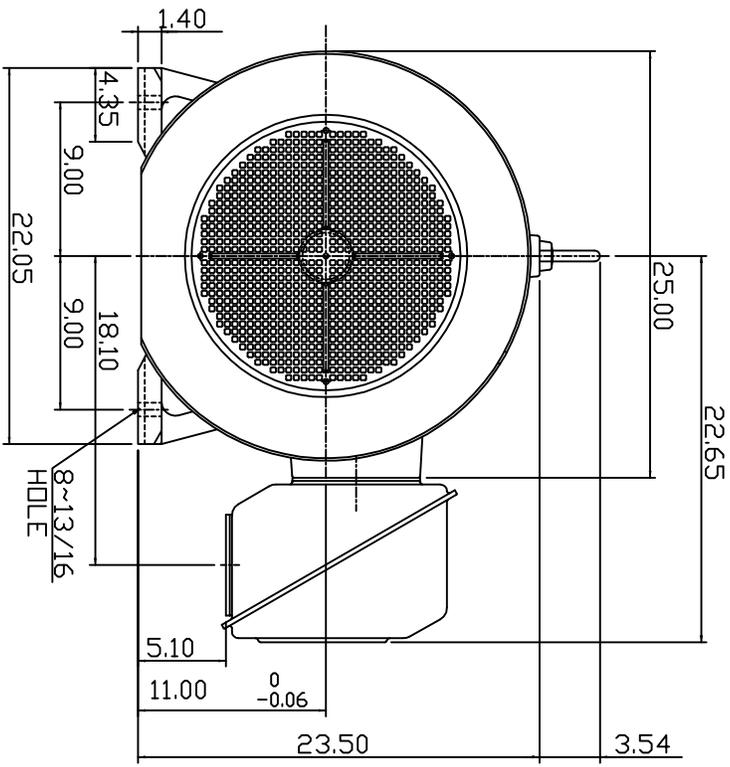

- NOTE:
1. DIMENSIONS IN INCHES
 2. FRAME SIZE 449T
 3. F CLASS INSULATION, S.F. 1.0
 4. FOR DIRECT FLEXIBLE COUPLING BEARING NO.: DRIVE END: 6320C3 OPP. DRIVE END: 6316C3
 5. ENCLDURE: IP44
 6. APPRDX. WEIGHT: 2450 LBS
 - 7.

DATE	DWN.	SLEE	JAN. 26 2011
MARCH 2, 2011	CHKD.	SLEE	JAN. 26 2011
CATALOG #:	APPD.	H.LIU	JAN. 26 2011

DATE	DWN.	SLEE	JAN. 26 2011
MARCH 2, 2011	CHKD.	SLEE	JAN. 26 2011
CATALOG #:	APPD.	H.LIU	JAN. 26 2011

OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR

DWG NO. 3A049DWB10464-28
REV: 00



6 5 4 3 2 1