
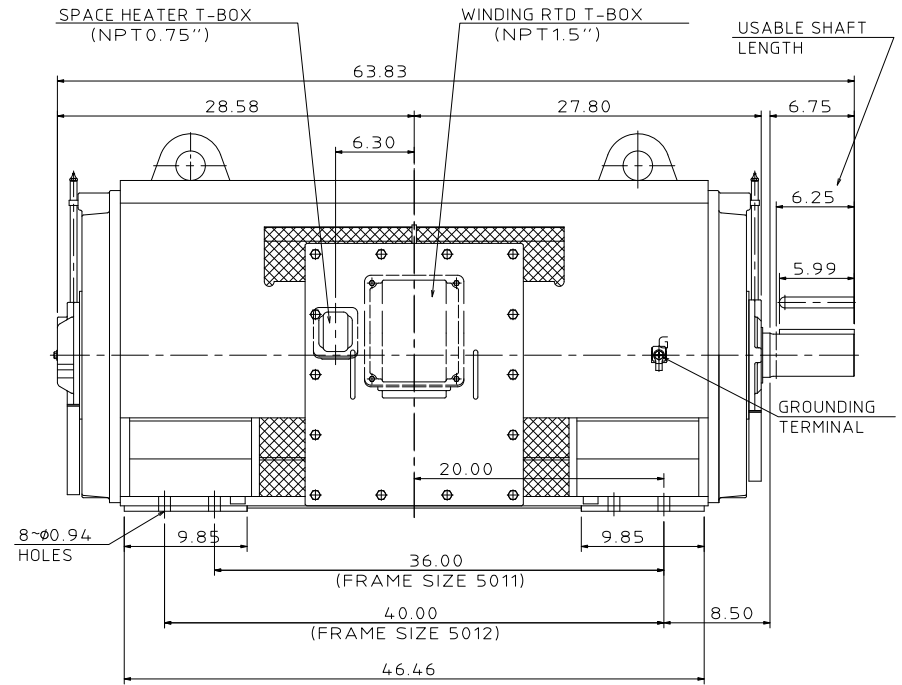



CATALOG #	ASHA	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
PG10002	AMHG	5012A	1000	746	2	3600	2300/4160	60	CONT.	F	1.15	6218C3	6315-INS	4730

WEATHER PROTECTED TYPE I. SQUIRREL CAGE ROTOR

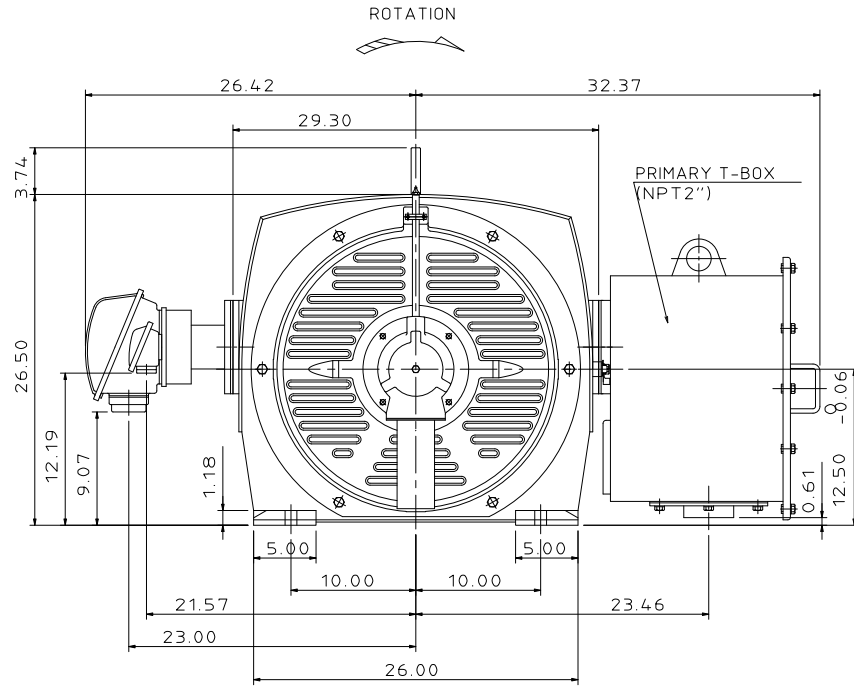

NOTES:

1. DIMENSIONS IN INCH.
2. ENCLOSURE: IP23.
3. FOR DIRECT FLEXIBLE COUPLING.
4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.
6. PROVISION FOR BEARING RTD MOUNTING:
2X .50" NPT PER BRACKET.

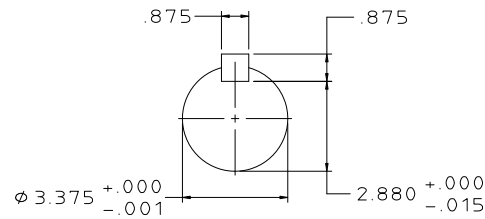

REV. DATA	TECO   Westinghouse				REV NO 01
	3-PHASE INDUCTION MOTOR OUTLINE DIMENSIONS			DWG NO. PG10002	
	DWN T. FELPS	051017	APPD S. GROHOSKY		051017
	TECO-WESTINGHOUSE MOTOR COMPANY			ROUND ROCK, TEXAS	
				USA	