


CATALOG #	ASHA	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
PG10004	AMHG	5810B	1000	745.7	4	1800	2300/4000	60	CONT.	F	1.15	6326C3	6322	6890

WEATHER PROTECTED TYPE I. SQUIRREL CAGE ROTOR

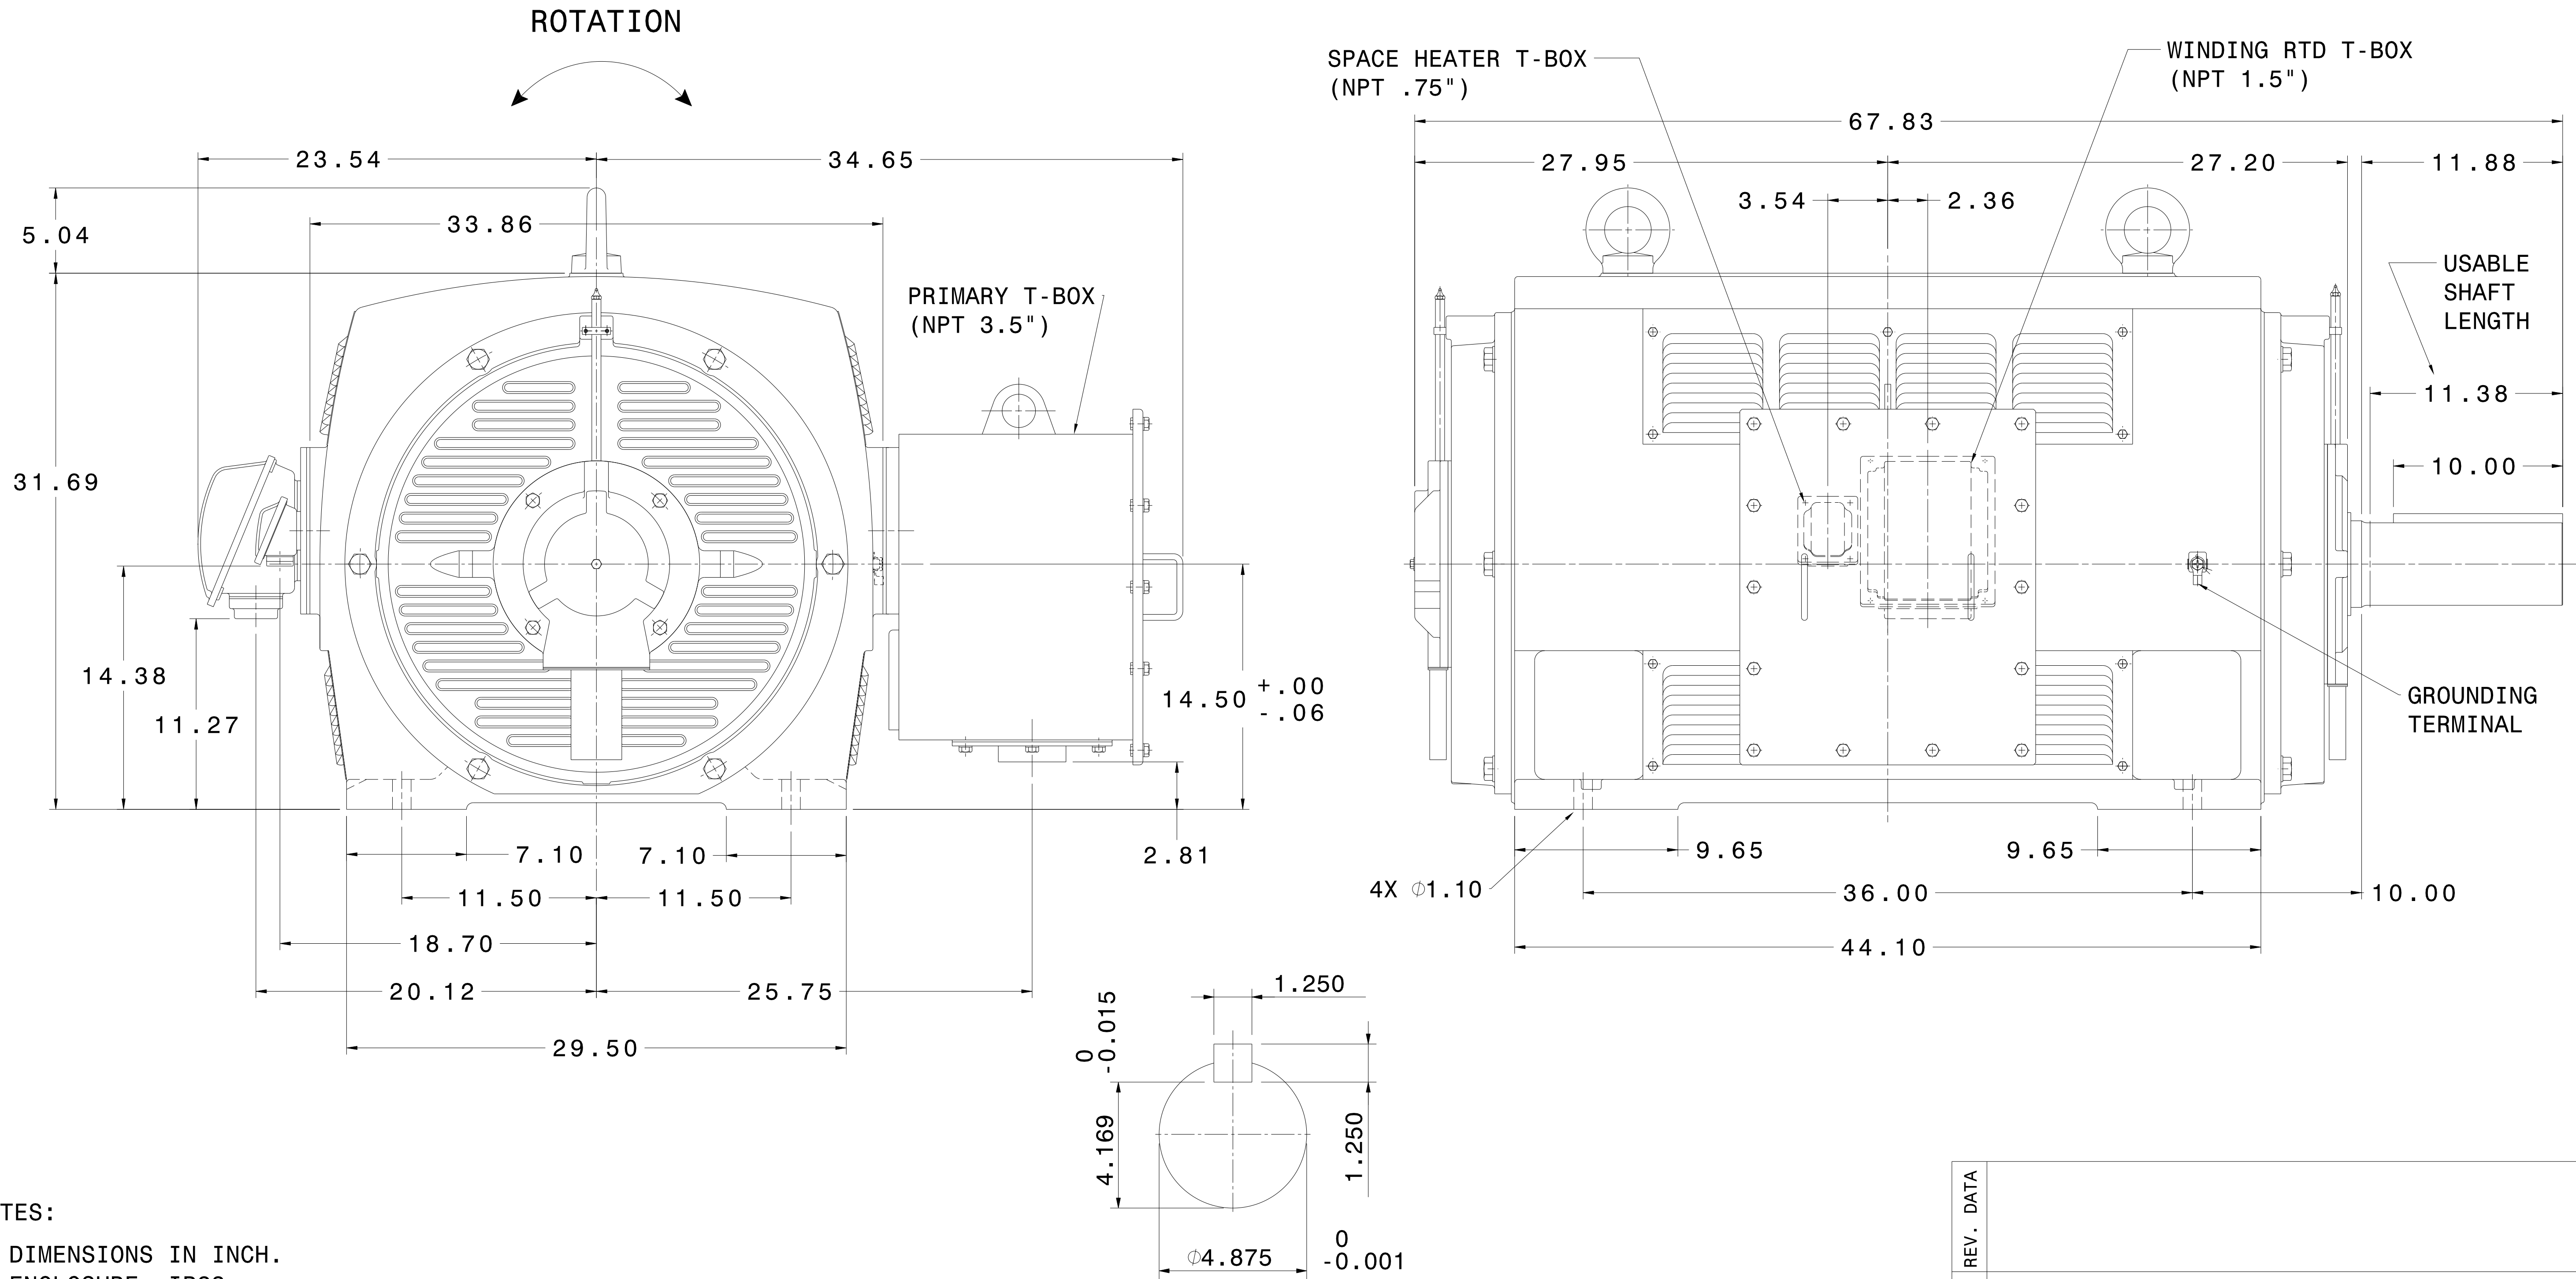

- NOTES:
1. DIMENSIONS IN INCH.
 2. ENCLOSURE: IP23.
 3. FOR BELT DRIVE.
 4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
 5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.
 6. PROVISION FOR BEARING RTD MOUNTING: 2X .50" NPT PER BRACKET.

REF: 4B040L330	REV. DATA	TEC Westinghouse		REV NO	01
	3-PHASE INDUCTION MOTOR			DWG NO.	PG10004
	OUTLINE DIMENSIONS				
	DWN K. MILNER		071817	APPD T. FELPS	071817
TECO-WESTINGHOUSE MOTOR COMPANY			ROUND ROCK, TEXAS USA		