


CATALOG #	TYPE	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
PG1006	AMHG	447T	100	74.6	6	1200	2300/4160	60	CONT.	F	1.15	6320C3	6318C3	1920

WEATHER PROTECTED TYPE I. SQUIRREL CAGE ROTOR

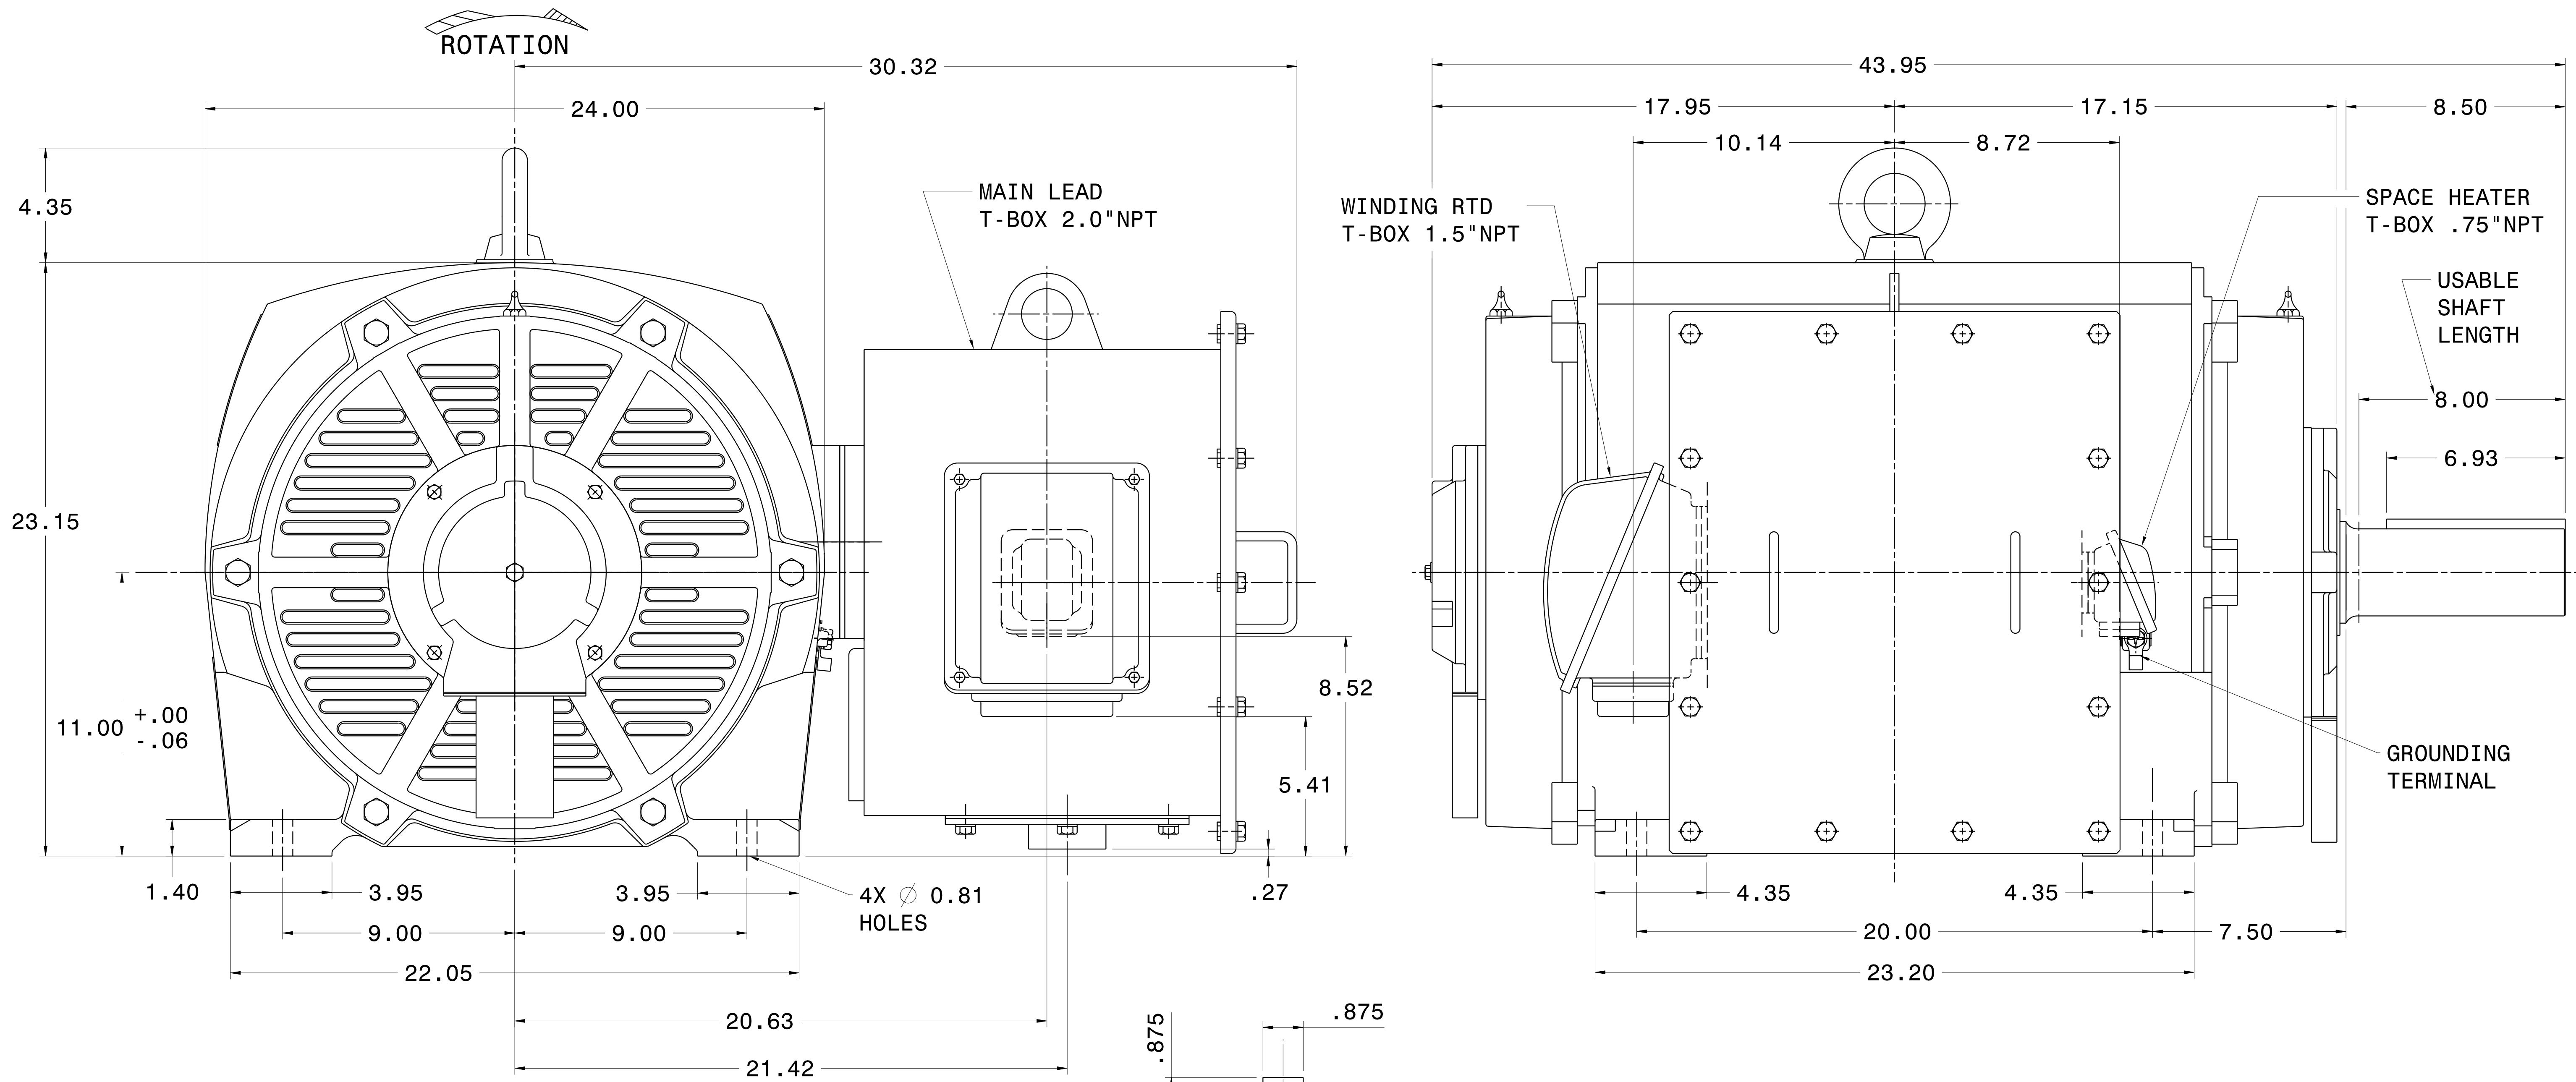

- NOTES:
- 1. DIMENSIONS IN INCH.
 - 2. ENCLOSURE: IP23.
 - 3. FOR BELT DRIVE.
 - 4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
 - 5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.

SHAFT END
(ENLARGED VIEW)

REV. DATA					REV NO
	TEC Westinghouse				01
REF: 4B040M463	3-PHASE INDUCTION MOTOR OUTLINE DIMENSIONS				DWG NO. PG1006
	DWN K. MILNER	080317	APPD T. FELPS	080317	
	TECO-WESTINGHOUSE MOTOR COMPANY				ROUND ROCK, TEXAS USA