
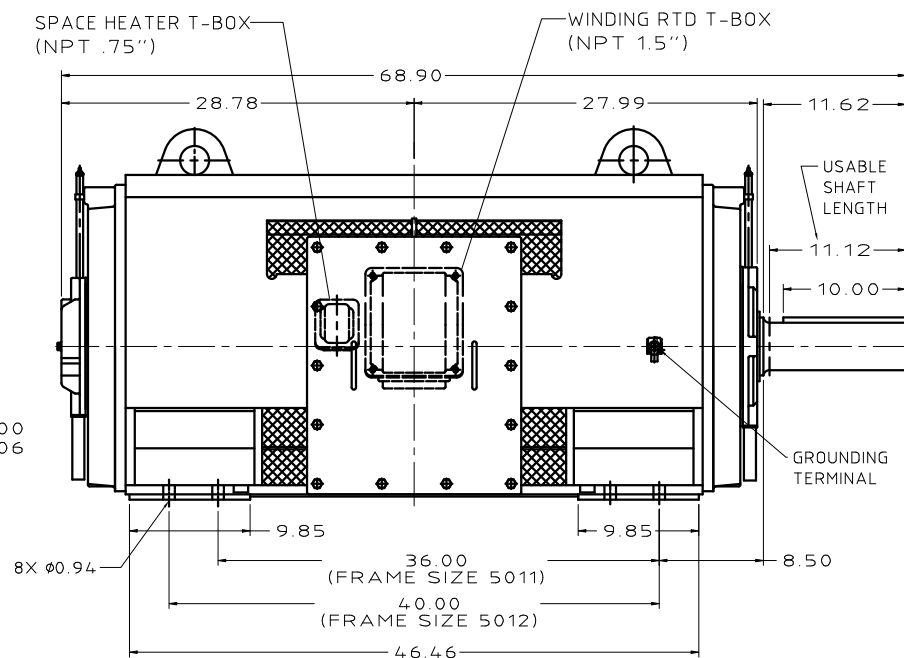


CATALOG #	ASHA	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
PG4008	AMHG	5012C	400	298.3	8	900	2300/4160	60	CONT.	F	1.15	NU324C3	6320C3	4820

WEATHER PROTECTED TYPE I, SQUIRREL CAGE ROTOR

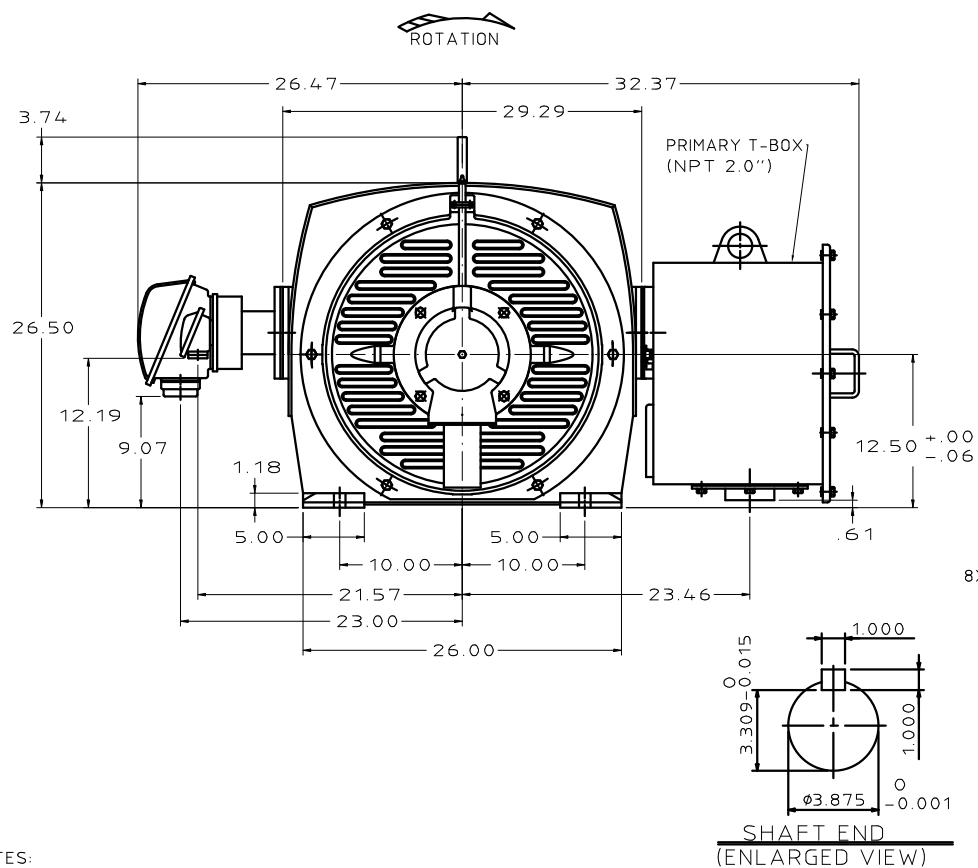

- NOTES:
1. DIMENSIONS IN INCH.
 2. ENCLOSURE: IP23.
 3. FOR BELT DRIVE.
 4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
 5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.
 6. PROVISION FOR BEARING RTD MOUNTING:
2X .50" NPT PER BRACKET.

REV. DATA					REV NO.	01
						
	3-PHASE INDUCTION MOTOR OUTLINE DIMENSIONS				DWG NO. PG4008	
REF. 48040L328	DWN K. MILNER		071817	APPD T. FELPS		071817
	TECO-WESTINGHOUSE MOTOR COMPANY			ROUND ROCK, TEXAS		USA