

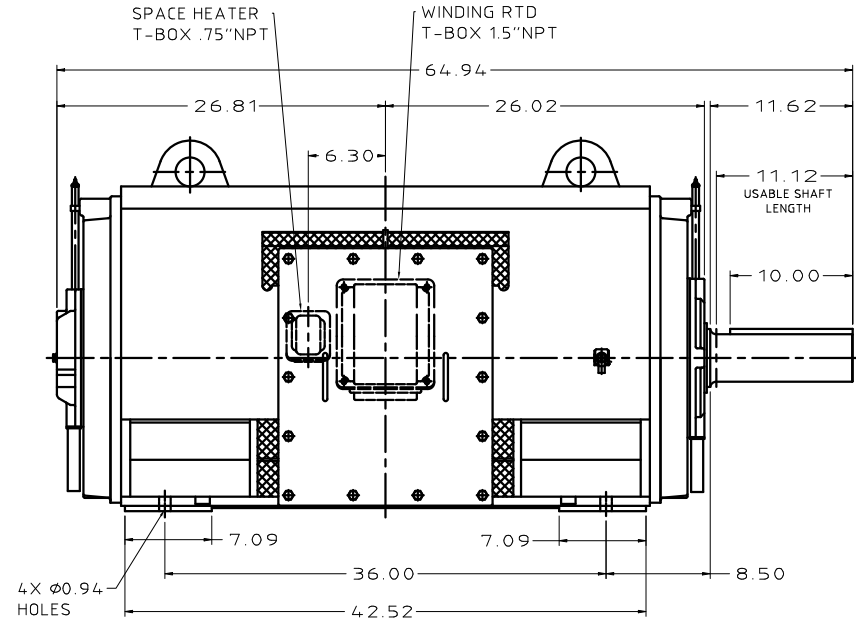


CATALOG #	TYPE	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
PG4506	AMHG	5011C	450	335.5	6	1200	2300/4160	60	CONT.	F	1.15	NU324C3	6320C3	3720

WEATHER PROTECTED TYPE I. SQUIRREL CAGE ROTOR

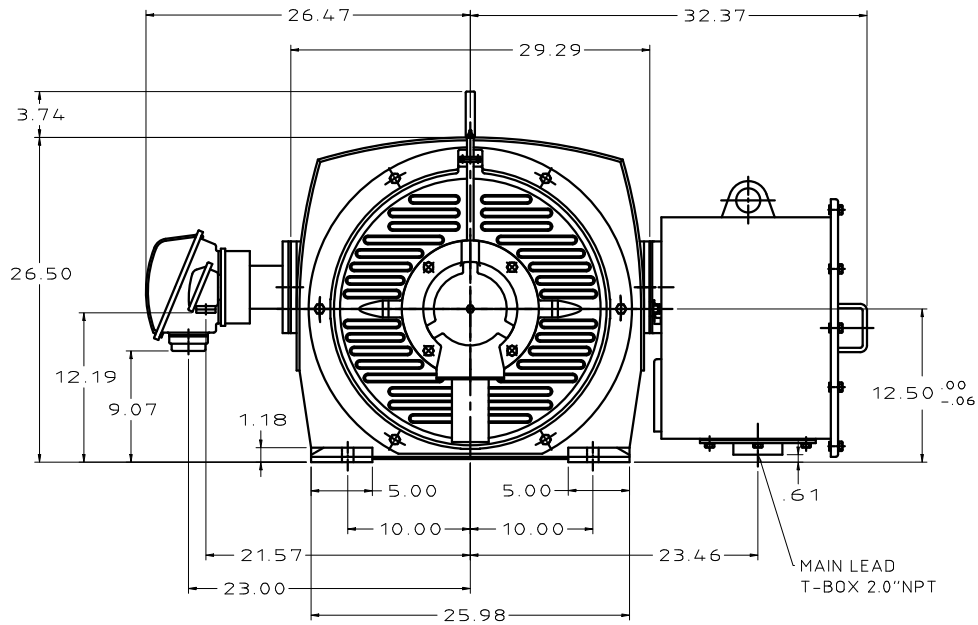

- NOTES:
1. DIMENSIONS IN INCH.
 2. ENCLOSURE: IP23.
 3. FOR BELT DRIVE.
 4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
 5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.
 6. PROVISION FOR BEARING RTD MOUNTING:
2X .50" NPT PER BRACKET.

REV. DATA	TECO Westinghouse		REV NO	
	3-PHASE INDUCTION MOTOR		01	
REF: 4B040L323	OUTLINE DIMENSIONS		PG4506	
	DWN K. MILNER	071817	APPD T. FELPS	071817
TECO-WESTINGHOUSE MOTOR COMPANY		ROUND ROCK, TEXAS		USA