
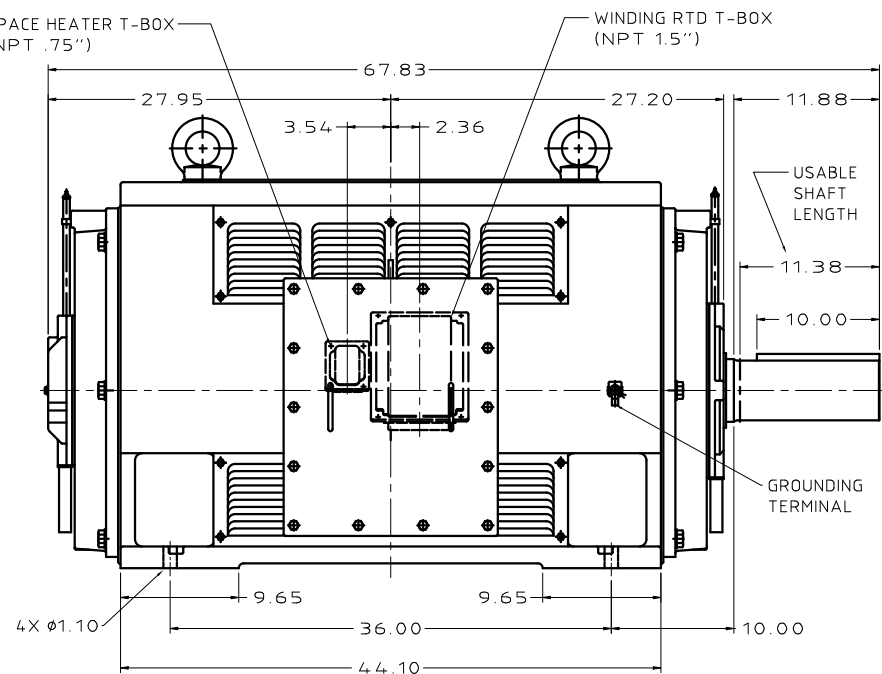


CATALOG #	ASHA	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
PG4508	AMHG	5810C	450	335.5	8	900	2300/4160	60	CONT.	F	1.15	NU326C3	6322	6160

WEATHER PROTECTED TYPE I, SQUIRREL CAGE ROTOR

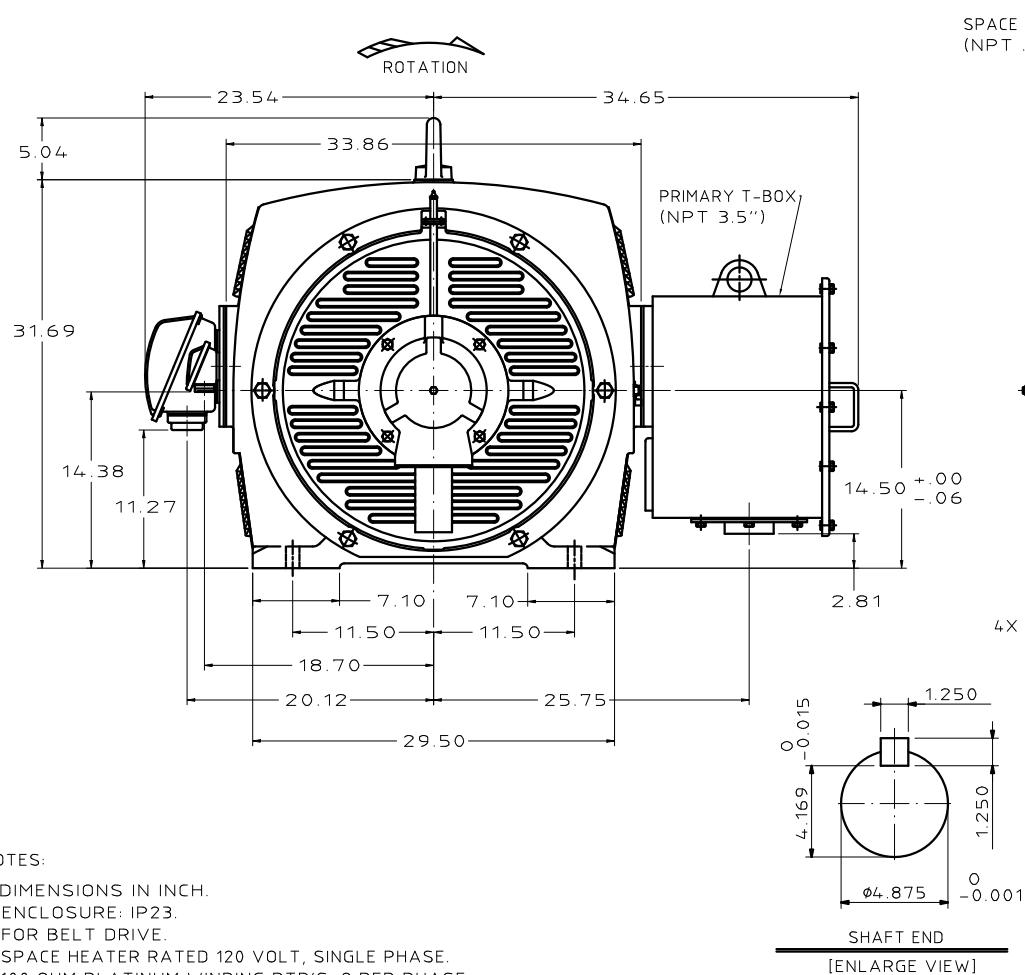

- NOTES:
1. DIMENSIONS IN INCH.
 2. ENCLOSURE: IP23.
 3. FOR BELT DRIVE.
 4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
 5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.
 6. PROVISION FOR BEARING RTD MOUNTING:
2X .50" NPT PER BRACKET.

REF. 48040L332	REV. DATA	
		
	REV NO. 01	
3-PHASE INDUCTION MOTOR OUTLINE DIMENSIONS		DWG NO. PG4508
DOWN K. MILNER		071817
TECO-WESTINGHOUSE MOTOR COMPANY		APPD T. FELPS
ROUND ROCK, TEXAS		071817
USA		