
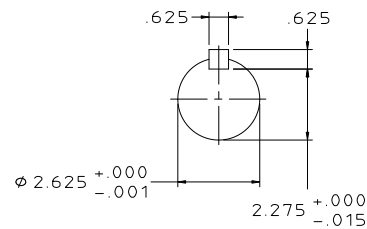
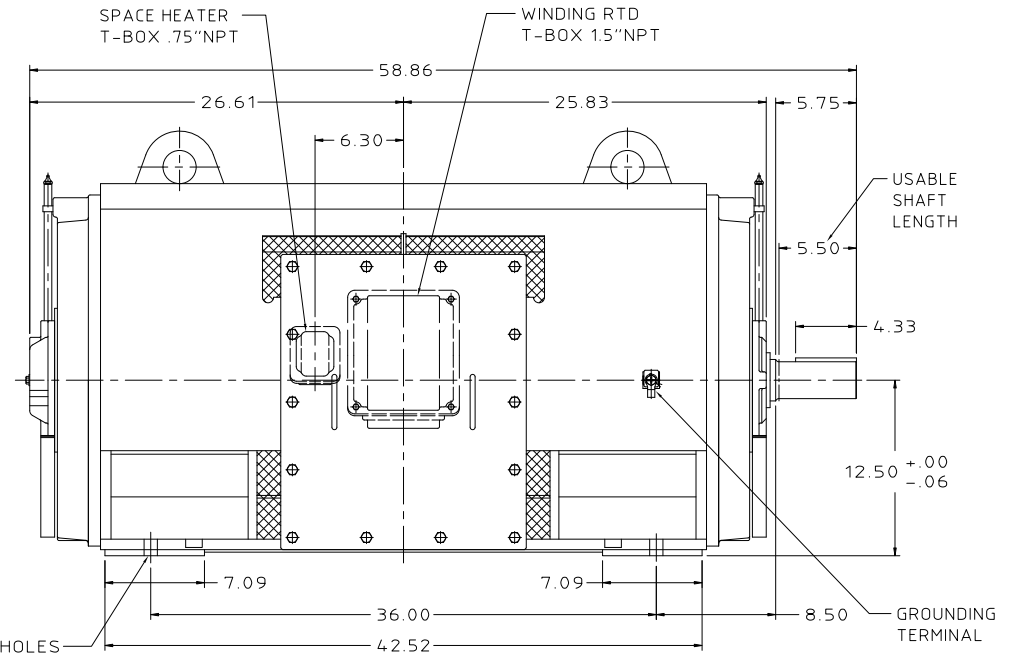


CATALOG #	TYPE	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
PG6002	AMHG	5011A	600	447.4	2	3600	2300/4160	60	CONT.	F	1.15	6315C3	6315-INS	4000

WEATHER PROTECTED TYPE I. SQUIRREL CAGE ROTOR

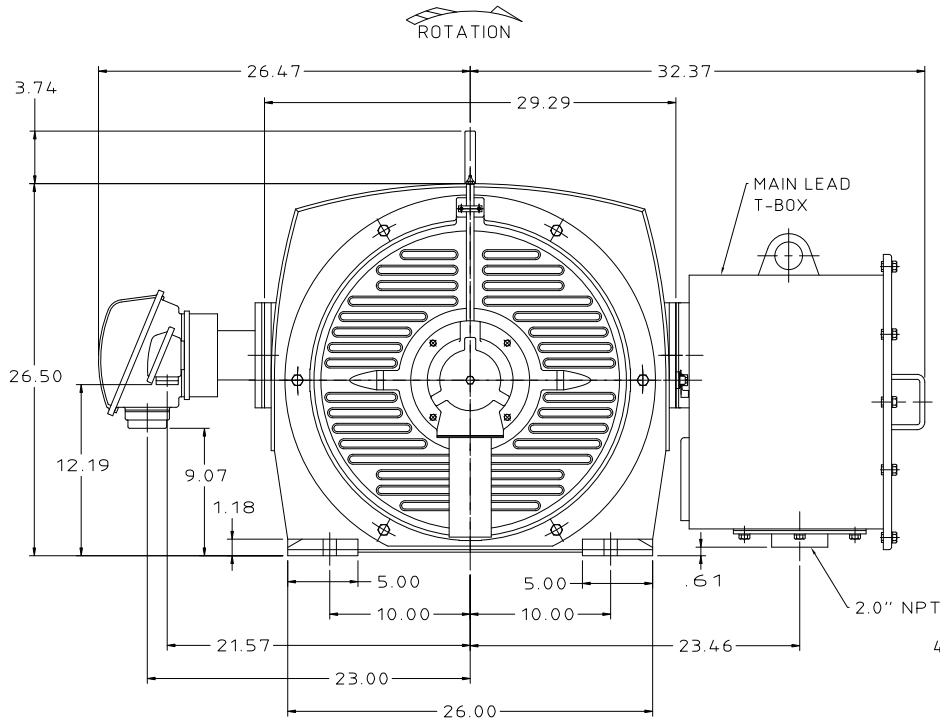

NOTES:

1. DIMENSIONS IN INCH.
2. ENCLOSURE: IP23.
3. FOR DIRECT FLEXIBLE COUPLING.
4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.
6. PROVISION FOR BEARING RTD MOUNTING:
2X .50" NPT PER BRACKET.

REV. DATA	TECO Westinghouse				REV NO
	3-PHASE INDUCTION MOTOR OUTLINE DIMENSIONS				01
REF: 48040L321	DWN K. MILNER		APPD T. FELPS		062117
	TECO-WESTINGHOUSE MOTOR COMPANY		ROUND ROCK, TEXAS		USA