

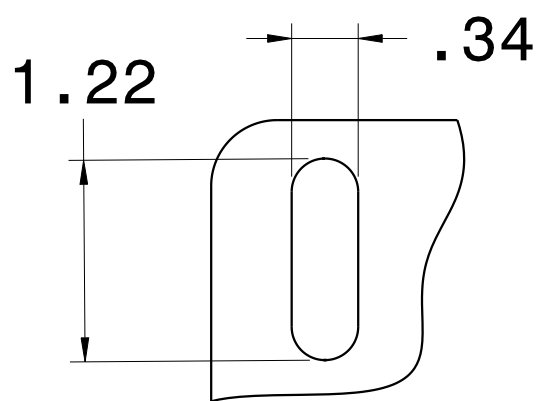
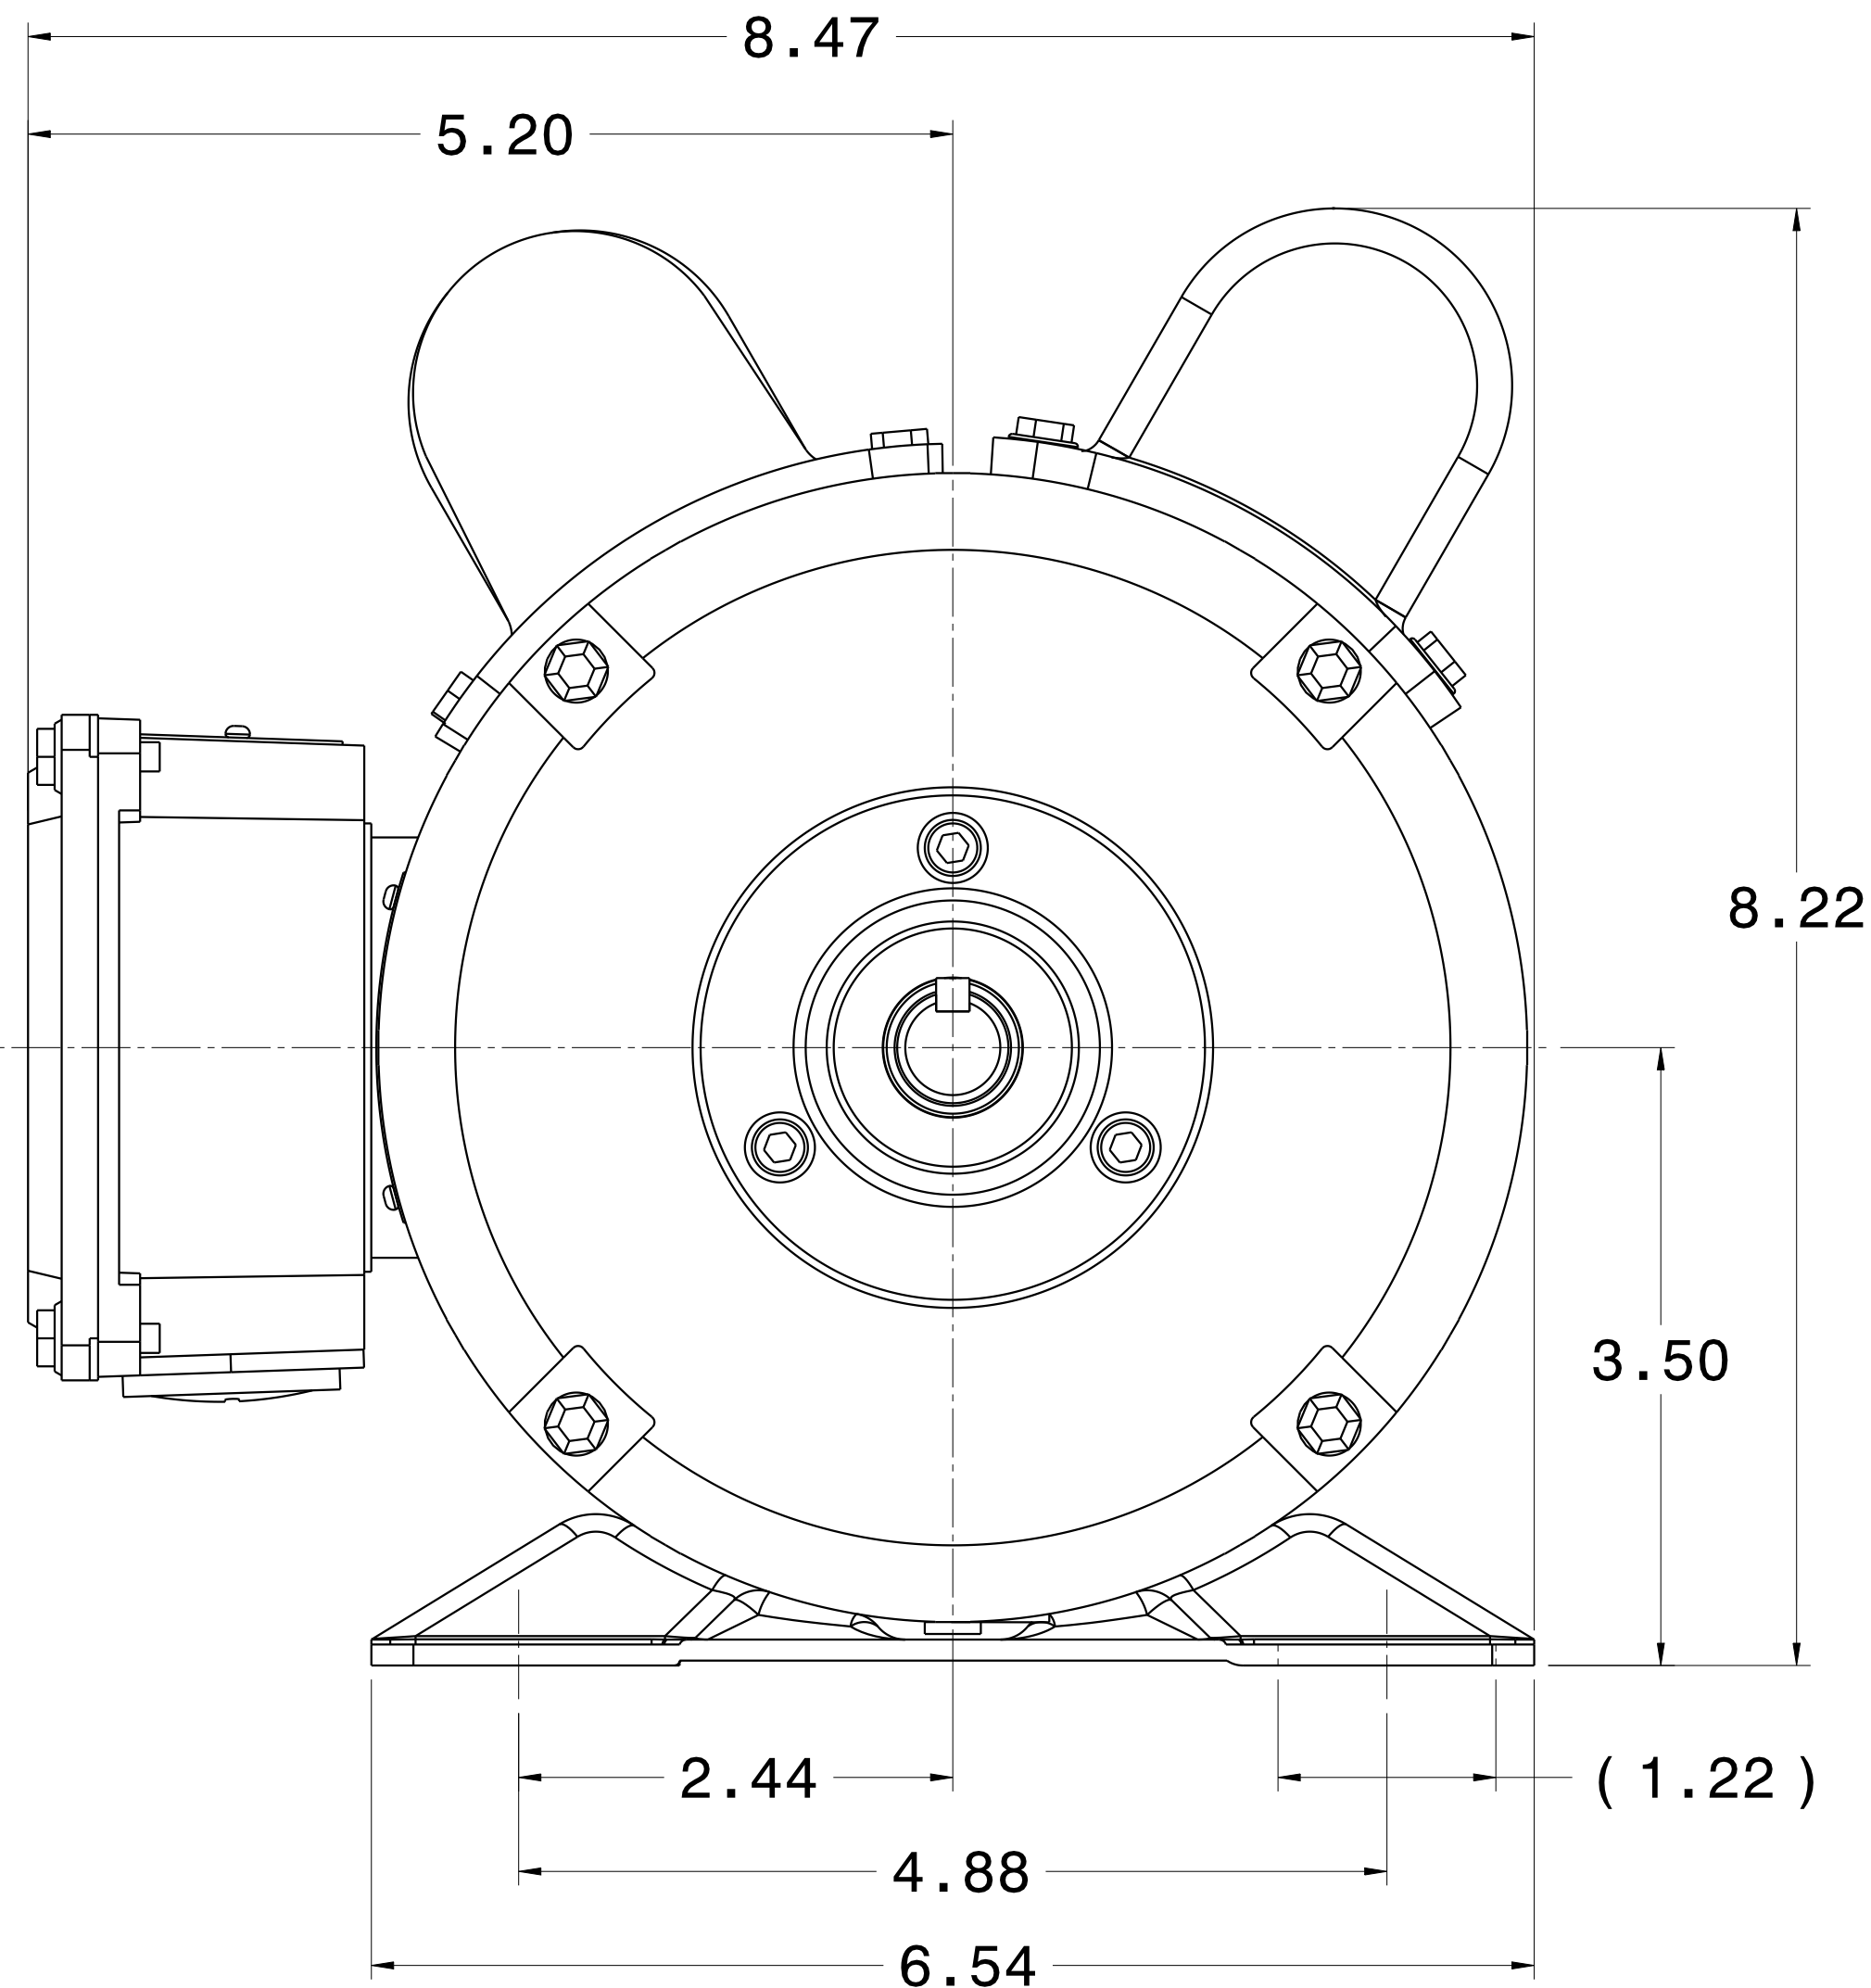


CATALOG #	TYPE	FRAME	OUTPUT		POLE	SYN. SPEED R.P.M.	VOLTAGE V.	Hz.	TIME RATING	INSULATION CLASS	SERVICE FACTOR	BEARINGS		WEIGHT LBS
			HP	kW								DE	NDE	
SPH0012	BSGS39	56H	1	.75	2	3600	115/208-230	60	CONT.	F	1.15	6204ZZ	6203ZZ	37

OPEN DRIP PROOF, SQUIRREL CAGE ROTOR

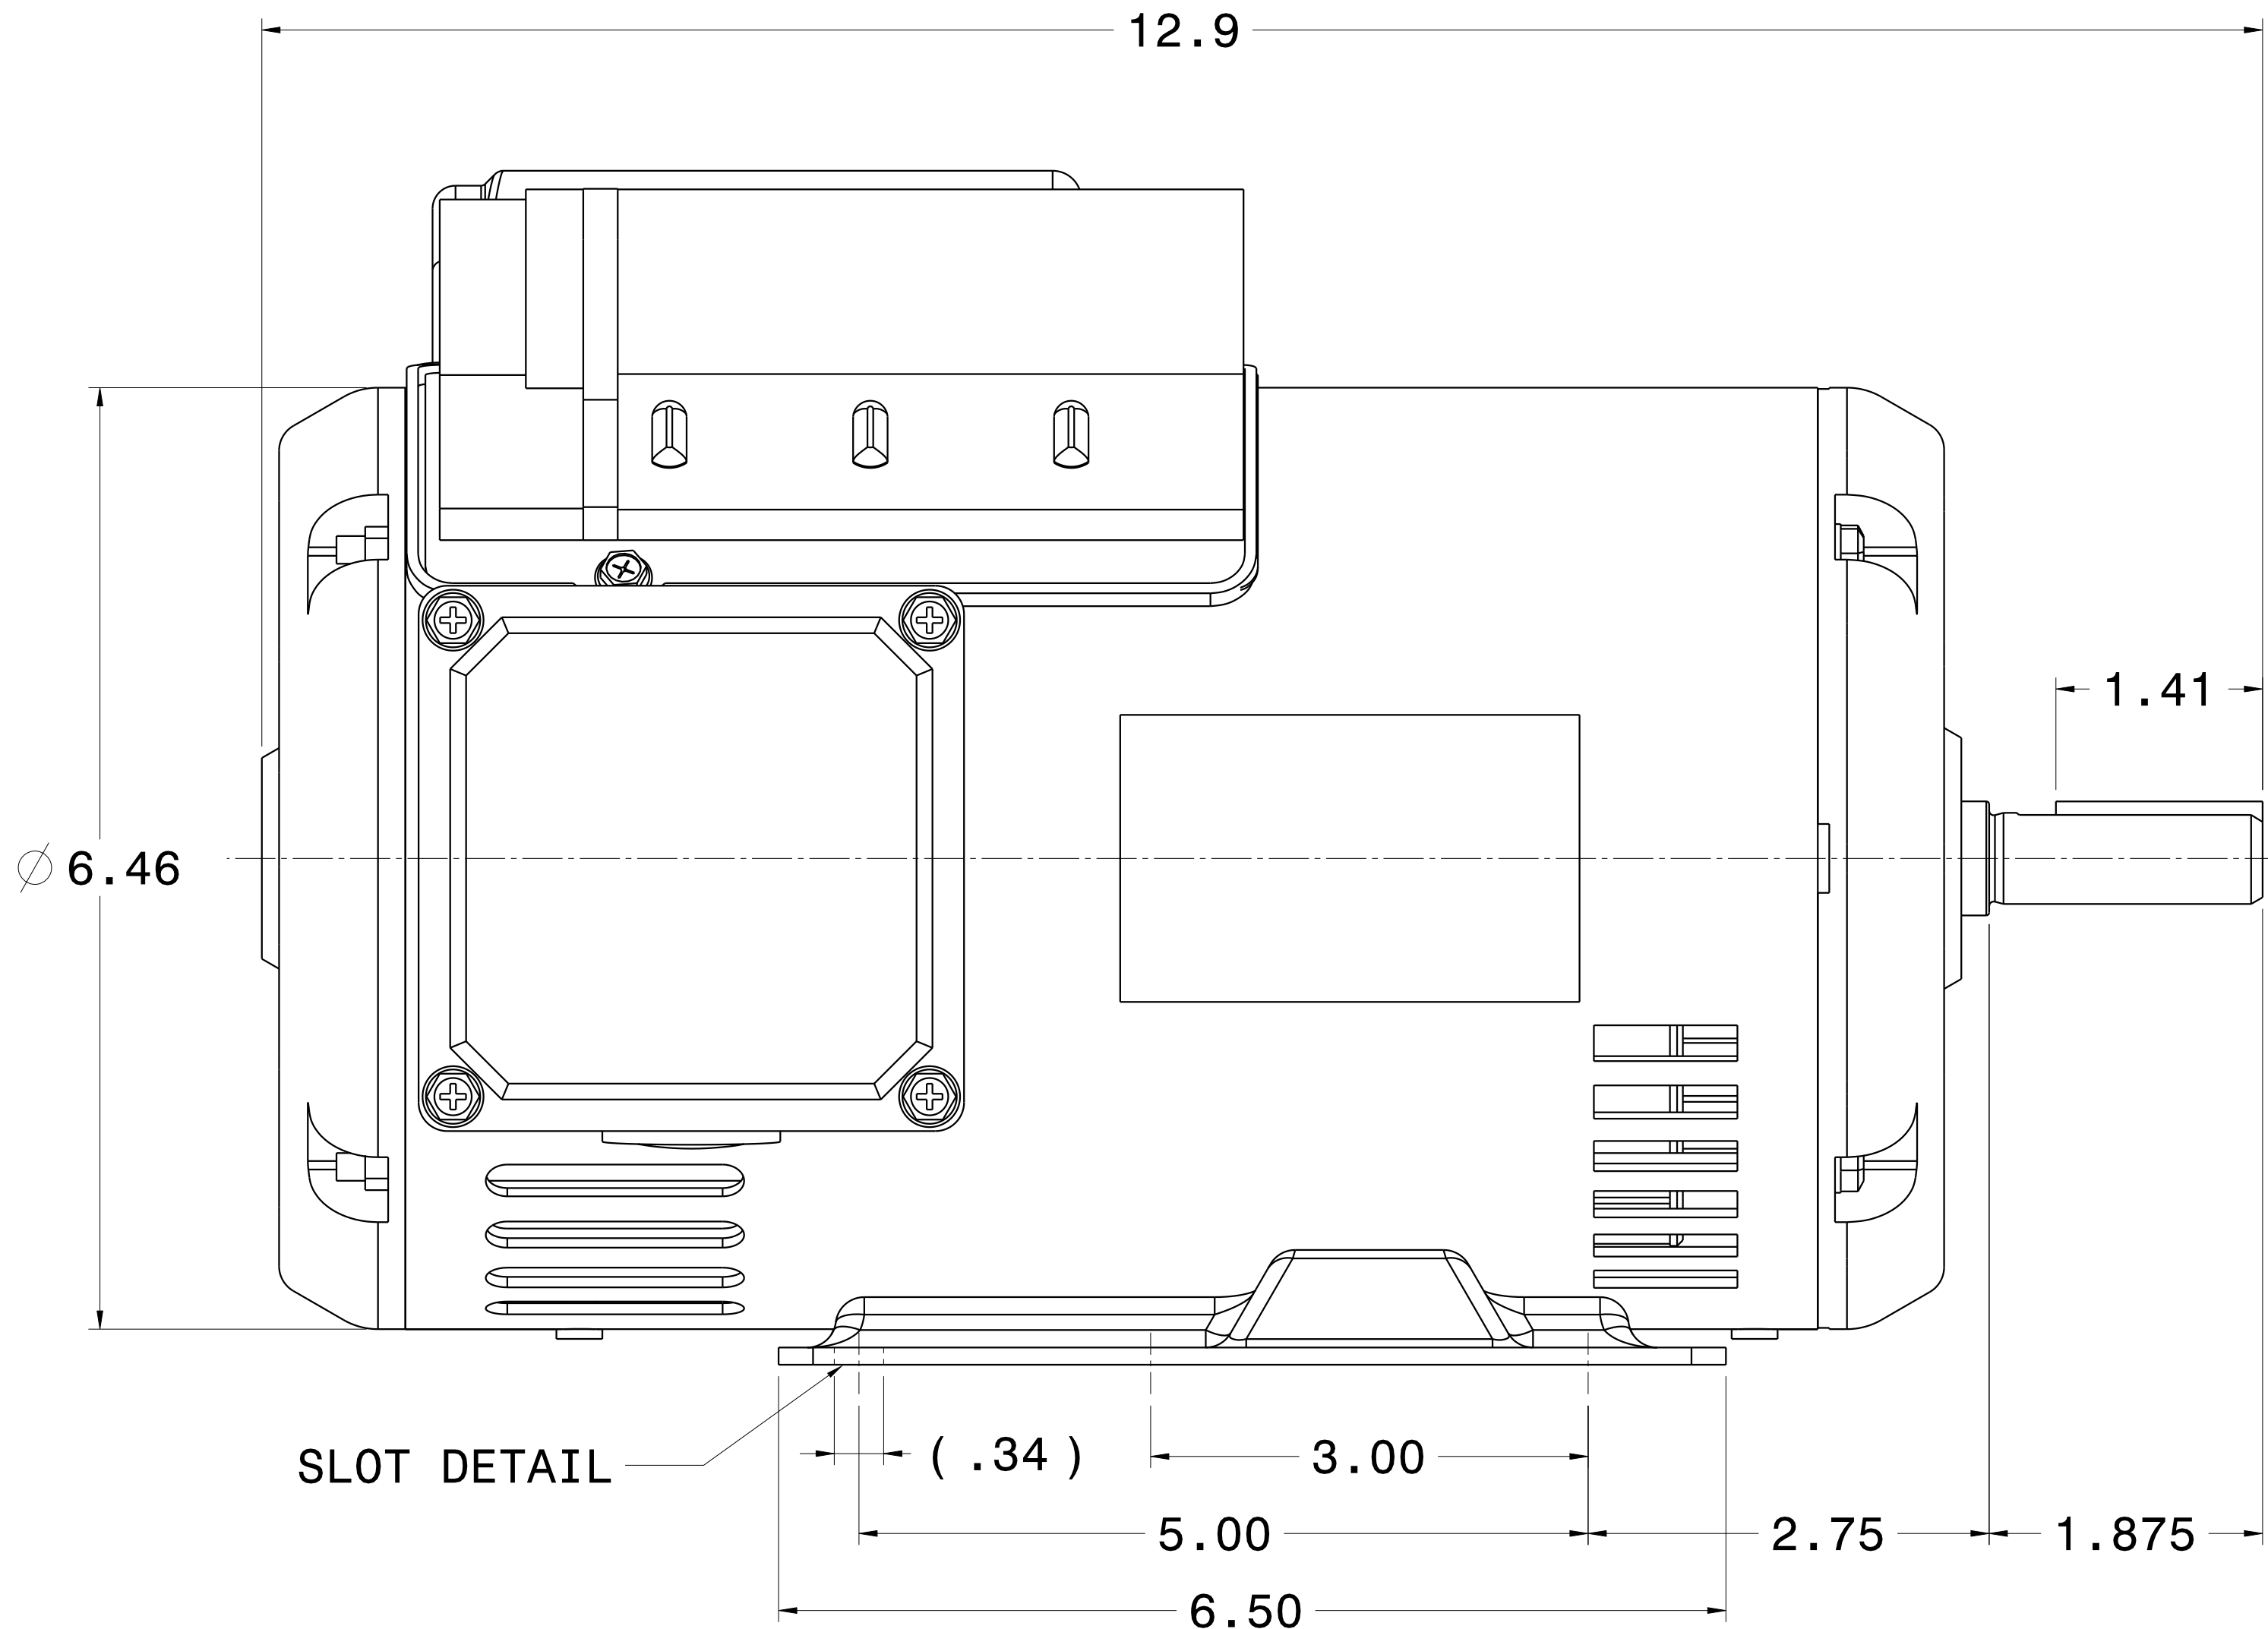

SLOT DETAIL
6X

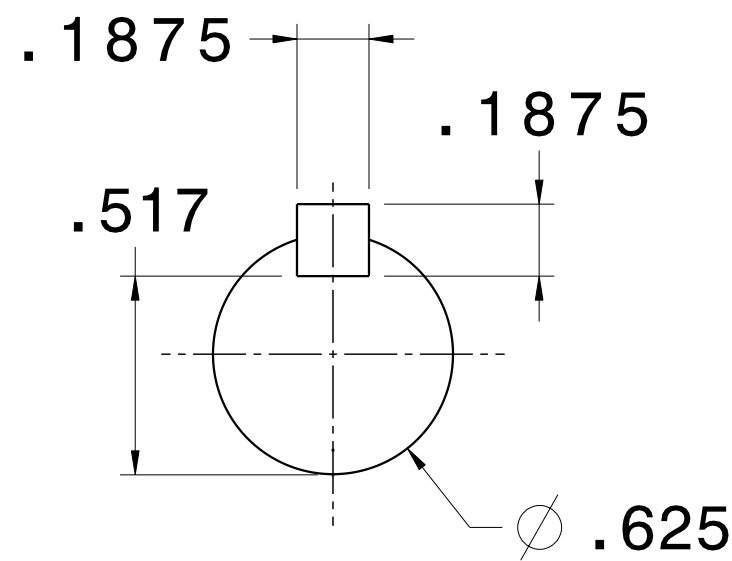

SHAFT END
(ENLARGED VIEW)

NOTES:

1. DIMENSIONS IN INCH.
2. ENCLOSURE: IP22.
3. FOR BELT SERVICE OR DIRECT COUPLING SERVICE.
4. BI-DIRECTIONAL ROTATION.

REF: 39020001KF10A	REV. DATA			
	TEC Westinghouse			REV NO 01
	HVAC SINGLE PHASE OUTLINE DIMENSIONS			DWG NO. SPH0012
	DWN K. MILNER	091417	APPD T. FELPS	091417
	TECO-WESTINGHOUSE MOTOR COMPANY			ROUND ROCK, TEXAS USA