
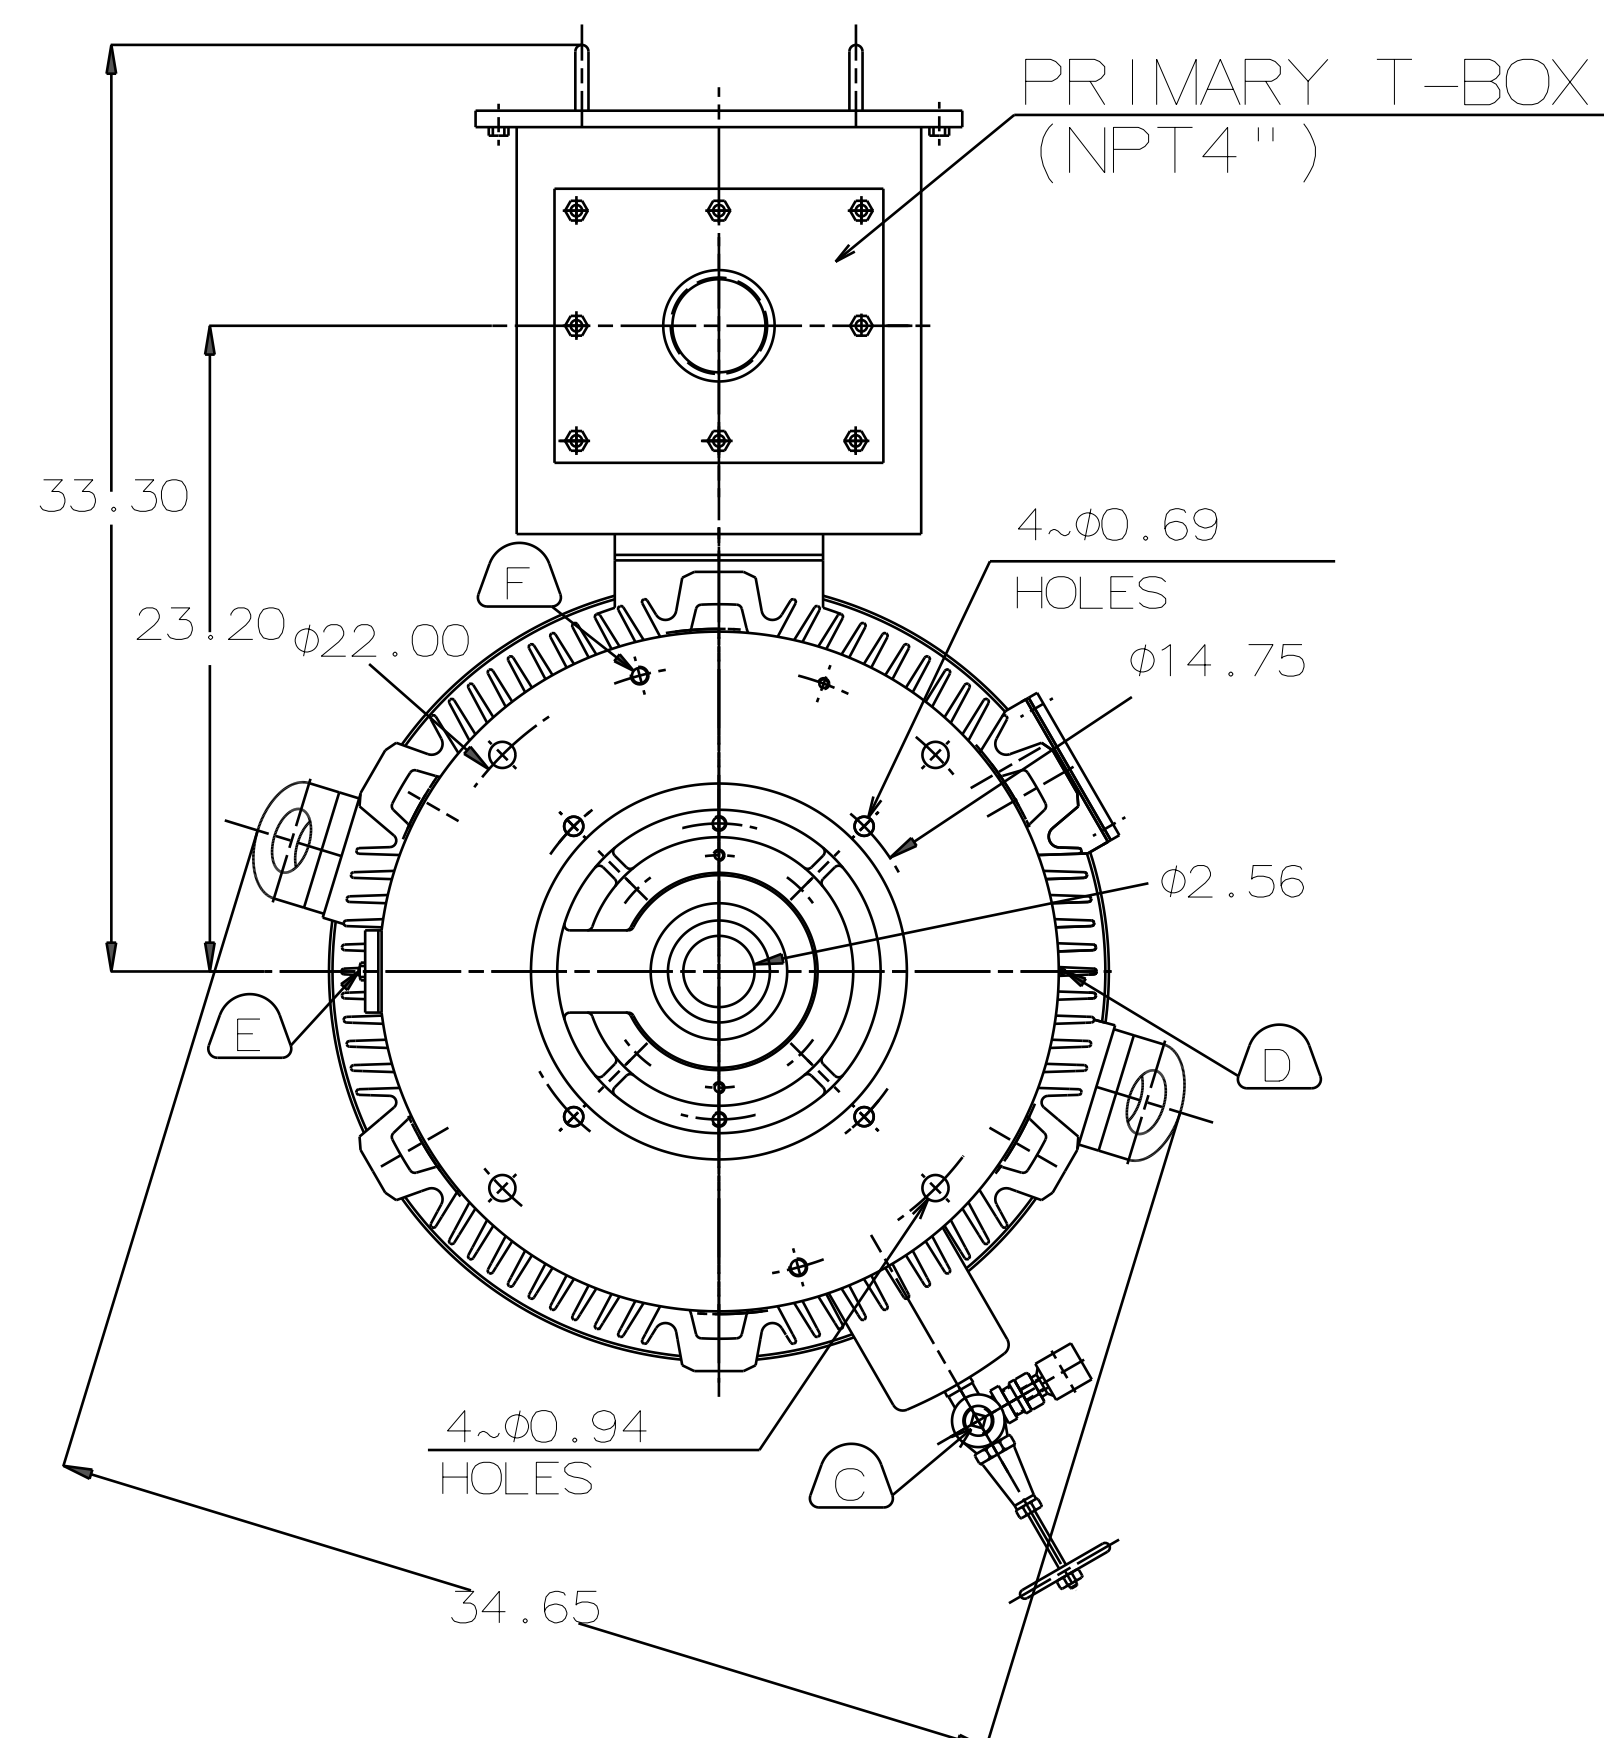



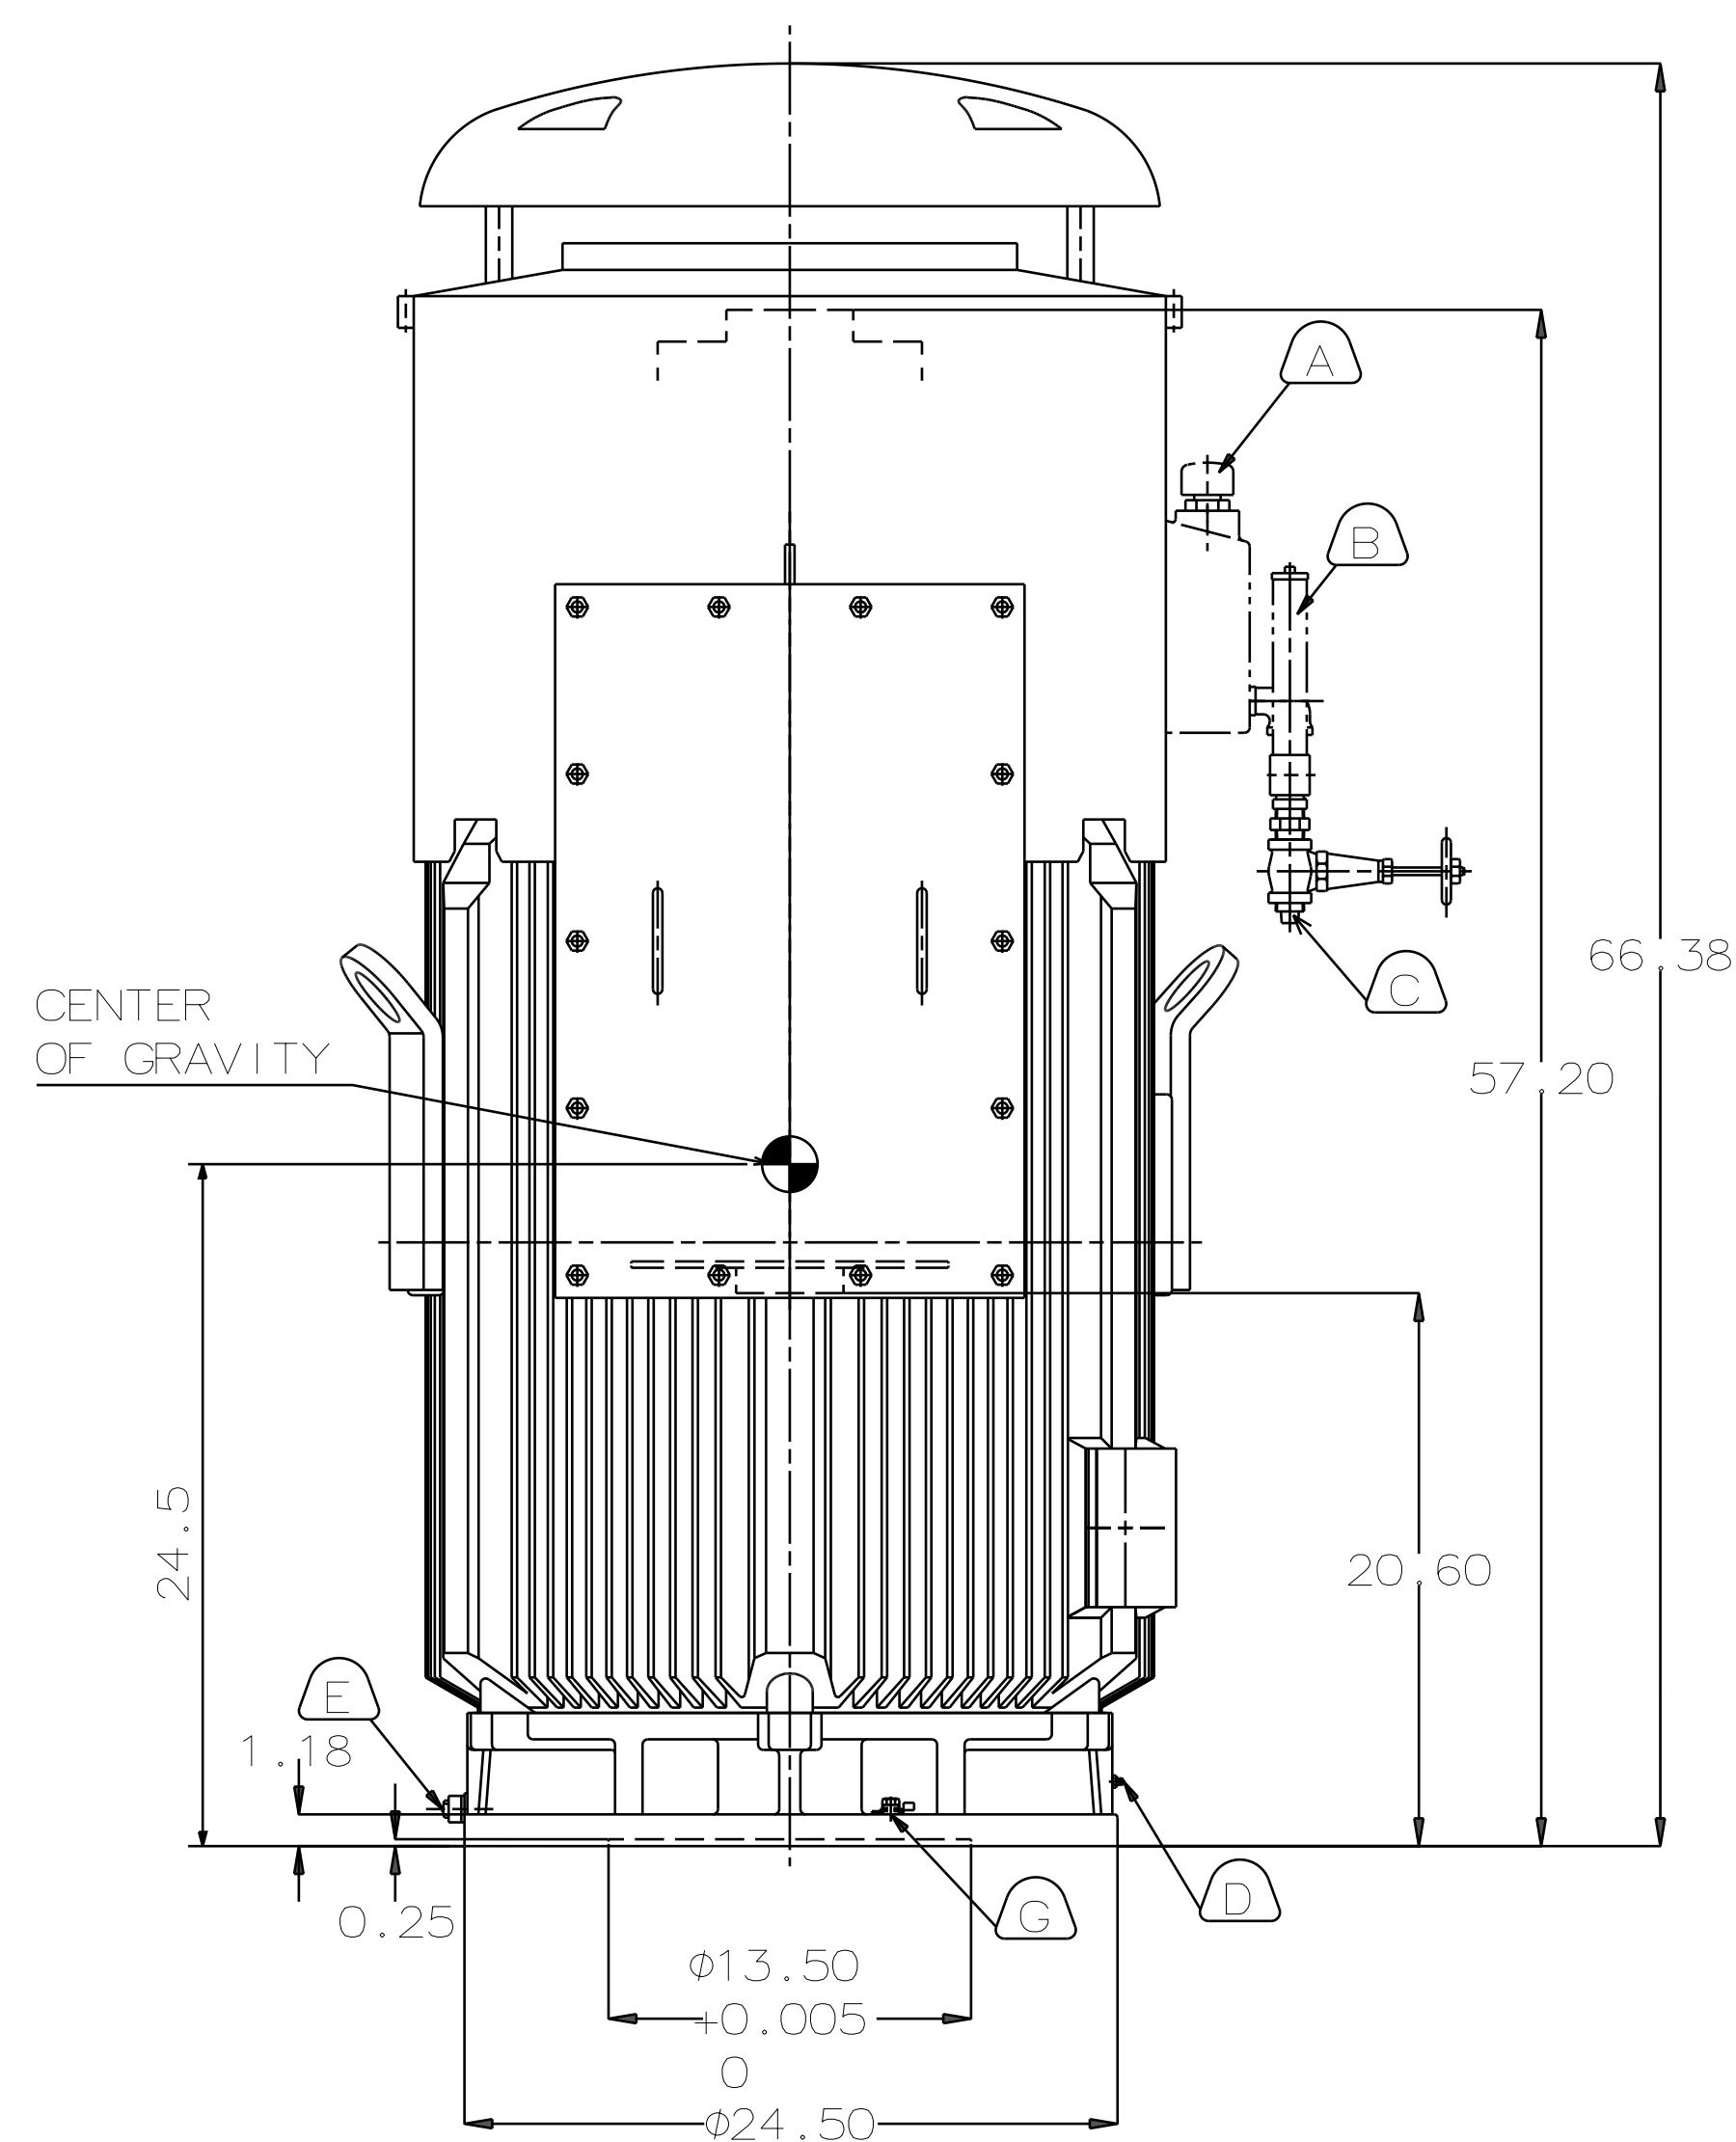


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP.	kW.					
AEHCNH	300	223.7	6	CONT	2300/4000	60	1200

TOTALLY ENCLOSED FAN-COOLED VERTICAL HOLLOW SHAFT TYPE, SQUIRREL CAGE ROTOR

NOTE :

1. DIMENSIONS IN INCH
2. FRAME NO. 5009
3. F CLASS INSULATION, S.F.: 1.15
4. FOR DIRECT COUPLING.
5. BEARING SIZE:
 - UPPER BEARING: 7328B [INSULATED]
 - LOWER BEARING: 6220C3 [UNINSULATED]
6. UPPER BEARING IS INSULATED. ANY METAL CONNECTIONS TO IT MUST BE INSULATED.
7. LUBRICATION:
 - UPPER BEARING USE OIL.
 - OIL VISCOSITY: ISO VG68 [300SSU AT 100 °F]
 - OIL QUANTITY: 1.8 GAL.
 - LOWER BEARING USE GREASE. [MOBIL POLYREX EM]
8. ROTATION: COUNTER-CLOCKWISE [VIEW FROM TOP].
9. WITH NON-REVERSE RATCHET MECHANISM.
10. WITH GIB KEY: 0.500X0.500X3.07, 1PCS
11. APPROXIMATE WEIGHT: 4530
12. DOWNTHRUST: 12,100 LBS
(L10-8800HRS)
13. REED FREQUENCY: 33 HZ
14. SPACE HEATER RATED AT 120 VOLT, SINGLE PHASE,
218 WATTS, LEADS TERMINATE IN MAIN LEAD BOX.

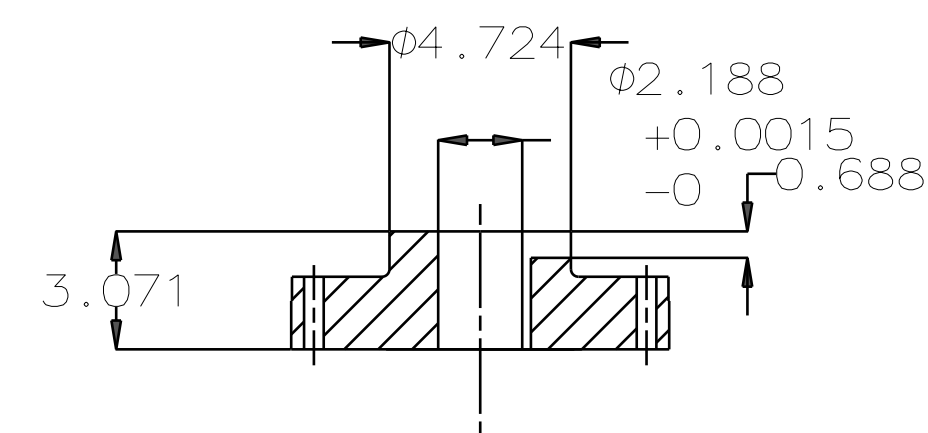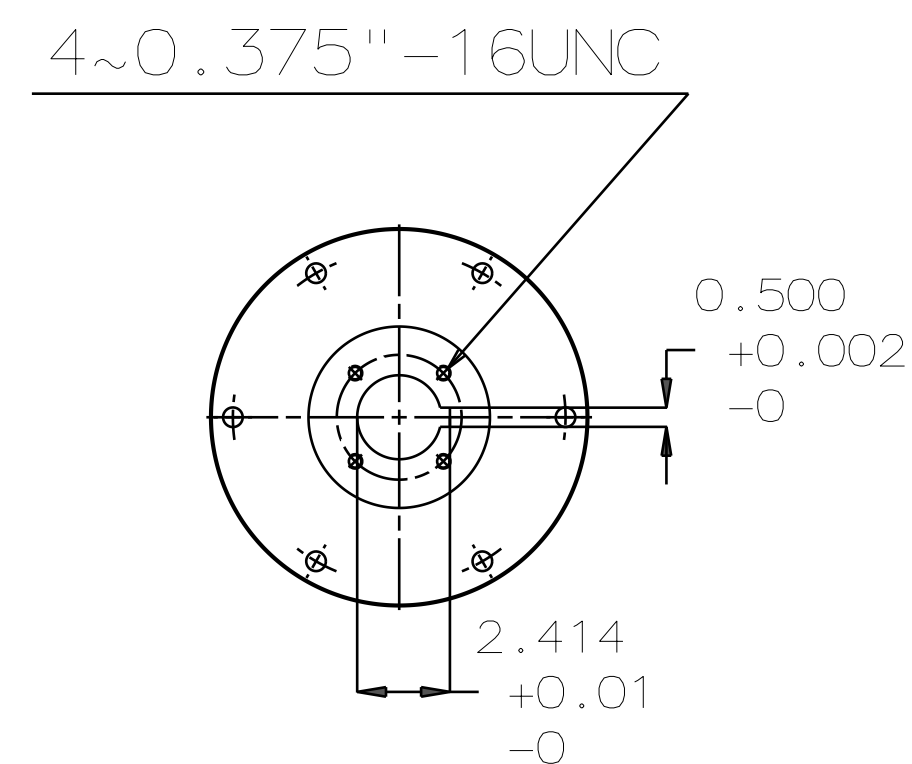

COUPLING
[ENLARGED VIEW]

- (A) OIL FILLER [UPPER BEARING]
- (B) OIL GAUGE [UPPER BEARING]
- (C) OIL DRAIN [UPPER BEARING]
- (D) GREASE INLET [LOWER BEARING]
- (E) GREASE DISCHARGER [LOWER BEARING]
- (F) 2~M16 VERTICAL JACKING HOLES, 180° APART IN MOTOR BASE.
- (G) M10 TAPPED HOLE IN MOTOR BASE WITH GROUNDING TERMINAL [R38-10] & BOLT LOCATED AS SHOWN.

DATE DEC 08 2016	OUTLINE DIMENSIONS	
VHKTP3006	3-PHASE INDUCTION MOTOR	
  Westinghouse		DWG NO. REV:00 4B04OL410

DWN .	Y .YANG	MAY .25 .2015
CHKD .	R .LEE	MAY .25 .2015
APPD .	C .LIU	MAY .25 .2015