


|                       |                                               |                       |
|-----------------------|-----------------------------------------------|-----------------------|
| DATE<br>APRIL 5, 2012 | OUTLINE DIMENSIONS<br>3-PHASE INDUCTION MOTOR | MOTOR TYPE:<br>AEHHXF |
| CAT. #: XP0602C       |                                               | FRAME NO. 364TSC      |

| Pole | HP     | KW           | Hz            | VOLT       | Syn. Speed<br>r/min(rpm) |
|------|--------|--------------|---------------|------------|--------------------------|
| 2    | 60     | 45           | 60            | 230/460    | 3600                     |
| Ins  | Rating | Dimension in | Approx Weight | Bearings   |                          |
| F    | CONT.  | inches       | 920 LBS       | DE: 6312C3 | NDE: 6212C3              |

Totally Enclosed Fan-Cooled Type. Squirrel-cage Rotor.

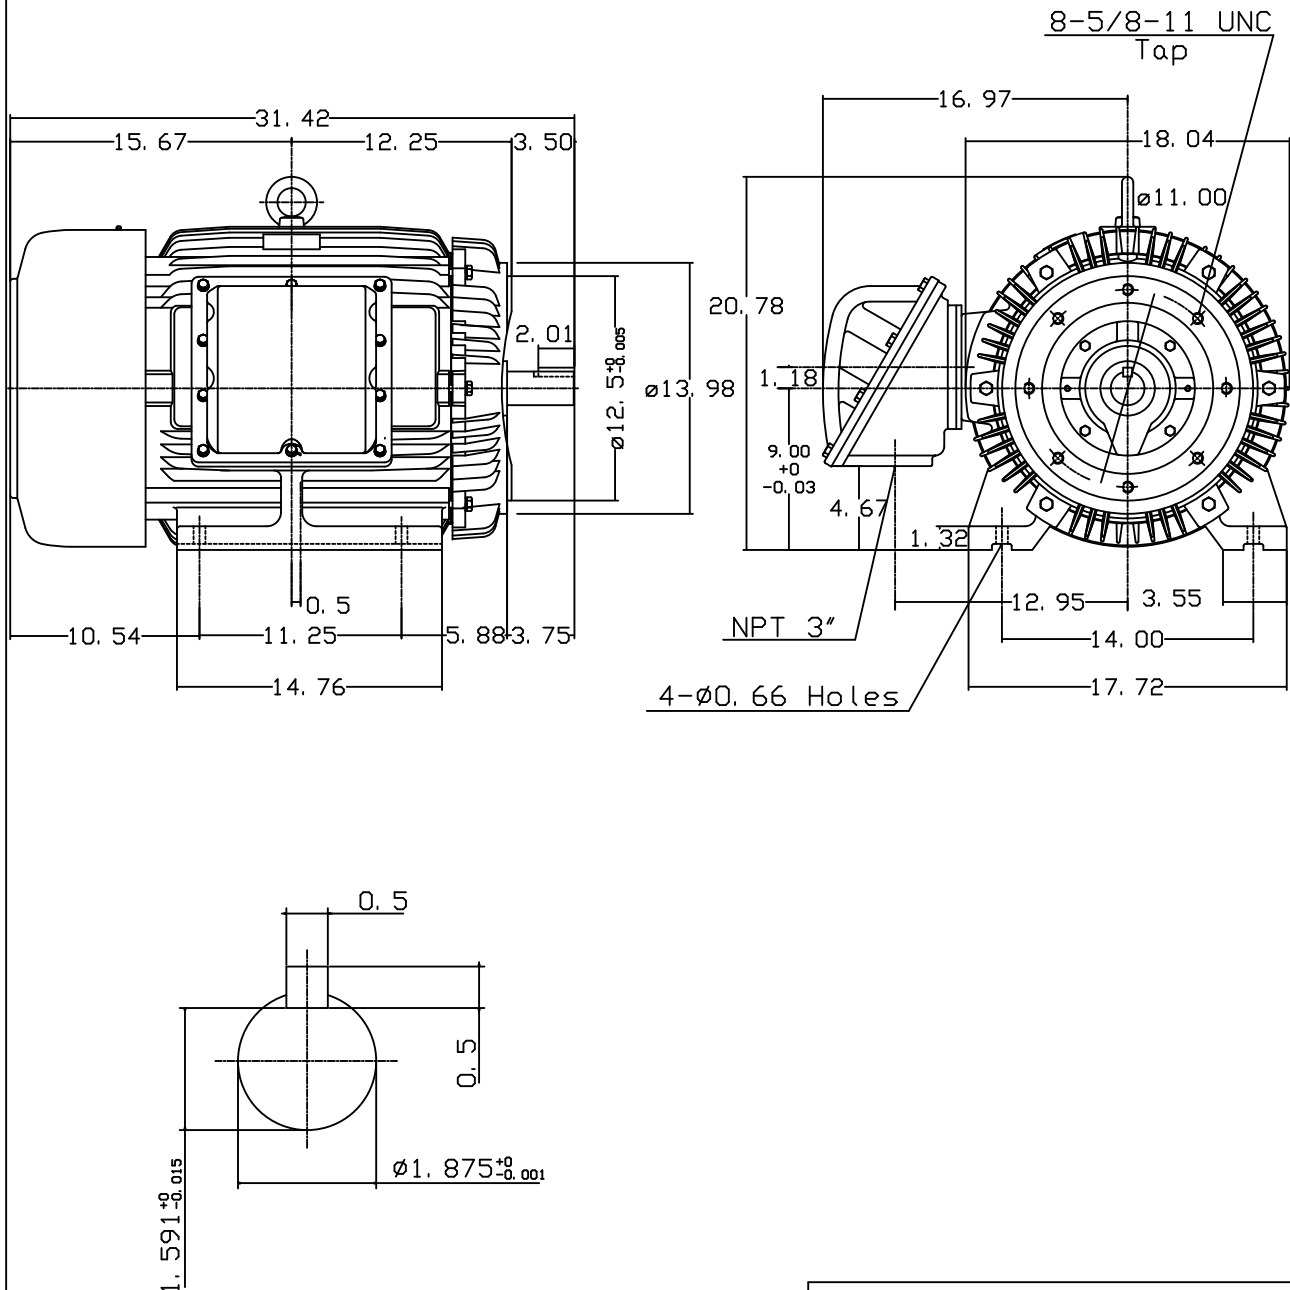

Note:

- Explosion proof:  
Class I Group D and  
Class II Group E, F, G.



|       |             |          |
|-------|-------------|----------|
| DWN.  | J. H. LIANG | 11-30-00 |
| CHKD. | C. H. KAO   | 03-16-01 |
| APPD. | Y. B. HUANG | 03-16-01 |

TEC   Westinghouse

DWG NO.  
31049M631240